

Original

1388

10 10 100

B388
L27

APPLICATION TO ALTER, REPAIR, ETC.

2

Application is hereby made to alter as per subjoined detailed statement of specification for Alterations, Additions or Repairs to buildings already erected, and herewith submit Plans and Drawings of such proposed alterations; and do hereby agree that the provisions of the Building Law will be complied with, whether the same are specified herein or not.

(Sign here) *Josephus Bradford*

NEW YORK, *July 8* 18*89*

- 1. State how many buildings to be altered. *One*
- 2. What is the street or avenue and the number thereof? Give diagram of property. *636 E. 6th Street*
- 3. How much will the alteration cost? \$ *1500.*

GIVE THE FOLLOWING INFORMATION AS TO THE PRESENT BUILDING :

- 1. Size of lot on which it is located, No. of feet front, *21*; feet rear, *21*; feet deep, *100.*
- 2. Size of building, No. of feet front, *21*; feet rear, *21*; feet deep, *40* No. of stories in height, *3*; No of feet in height from curb level to highest point of beams, *32*
- 3. Material of building, *Brick*; material of front, *Brick*
- 4. Whether roof is peak, flat, or mansard, *Flat.*
- 5. Depth of foundation walls _____ feet; thickness of foundation walls, *12 in*; materials of foundation walls, *Brick*
- 6. Thickness of upper walls, *8* inches. Material of upper walls, *Brick*
- 7. Whether independent or party walls, *Party wall at present*
- 8. How the building is or was occupied, *Residence and Chapel.*

IF TO BE RAISED OR BUILT UPON, GIVE THE FOLLOWING INFORMATION :

- 1. How many stories will the building be when raised? _____
- 2. How high will the building be when raised? _____
- 3. Will the roof be flat, peak, or mansard? _____
- 4. What will be the thickness of wall of additional stories? _____ story, _____ inches; _____ story, _____ inches.
- 5. Give size and material of floor beams of additional stories; _____ 1st tier, _____, _____ x _____; _____ 2d tier, _____, _____ x _____. Distance from centres on _____ tier, _____ inches; _____ tier _____ inches.
- 6. How will the building be occupied? _____

IF TO BE EXTENDED ON ANY SIDE, GIVE THE FOLLOWING INFORMATION.

- 1. Size of extension, No. feet front, _____; feet rear, _____; feet deep, _____; No. of stories in height, _____; No. of feet in height, _____.
- 2. What will be the material of foundation walls of extension? _____ What will be the depth? _____ feet. What will be the thickness? _____ inches.
- 3. Will foundation be laid on earth, sand, rock, timber or piles? _____

IF TO BE EXTENDED ON ANY SIDE GIVE THE FOLLOWING INFORMATION.

4. What will be the base, stone or concrete? If base stones, give size and thickness and how laid, If concrete, give thickness,
5. What will be the sizes of piers? What will be the sizes of the base of piers?
6. What will be the thickness of upper walls? 1st story, inches; 2d story, inches; 3d story, inches; 4th story, inches; 5th story, inches; 6th story, inches; 7th story, inches; from thence to top, inches; and of what materials to be constructed,
7. State whether independent or party-walls. If party-walls give thickness thereof.
8. With what material will walls be coped?
9. What will be the materials of front? If of stone, what kind? Give thickness of front ashlar. Give thickness of backing.
10. Will the roof be flat, peaked or mansard?
11. What will be the materials of roofing?
12. Give size and material of floor beams, 1st tier, x; 2d tier, x; 3d tier, x; 4th tier, x; 5th tier, x; 6th tier, x; 7th tier, x; roof tier, x State distance from centres on 1st tier, inches; 2d tier, inches; 3d tier, inches; 4th tier, inches; 5th tier, inches; 6th tier, inches; 7th tier, inches; roof tier, inches
13. If floors are to be supported by columns and girders, give the following information: Size and material of girders under 1st floor, x under each of the upper floors, Size and material of columns under first floor, under each of the upper floors,
14. If the front, rear or side walls are to be supported, in whole or in part, by iron girders or lintels, give definite particulars,
15. If girders are to be supported by brick piers and columns, state the size of piers and columns.
16. How will the extension be connected with present or main building?
17. How will the extension be occupied? If for dwelling purposes, state how many families are to occupy each floor.
18. State who will superintend the alterations.

IF ALTERED INTERNALLY, GIVE DEFINITE PARTICULARS AND STATE HOW THE BUILDING WILL BE OCCUPIED:

.....
.....
.....
.....

IF THE FRONT, REAR, OR SIDE WALLS, OR ANY PORTION THEREOF, ARE TO BE TAKEN OUT AND REBUILT, GIVE DEFINITE PARTICULARS, AND STATE IN WHAT MANNER:

*West side wall to be taken down and rebuilt as independent wall.
Foundation - 20 inches Stone & Concrete Base 18" x 24"
Basement - 12 inch Brick & Cement
Upper wall 8 " " " " " "*

OWNER: MORAVIAN CHURCH
ARCHITECT: RADFORD
MASON: RICHARD DEEVES

Owner: Moravian Church Address: Bethlehem Pa
Architect: Jesse Kent Radford Address: 76 Bible House N.Y.
Mason: Richard Deeves Address: 66 W. 83rd Street N.Y.
Carpenter: _____ Address: _____

REPORT UPON APPLICATION.

BUREAU OF INSPECTION OF BUILDINGS,
NEW YORK,..... 18

To the Superintendent of Buildings:

I respectfully report that I have thoroughly examined and measured the building, walls, etc., named in the foregoing application, and found the foundation wall to be built of _____ inches thick, _____ feet below curb, the upper wall built of _____ inches thick, _____ feet deep, _____ feet in height, and that the mortar in said wall is _____ hard and good, and that all the walls are _____ in good and safe condition.

What is the nature of the ground?.....

What kind of sand was used in the mortar?.....

How is or was the building occupied?.....

(The Inspector must here state what defects, if any, are in the walls, beams or other part of the building.)

The " " state the thickness of each wall in each and every story.)

See unsafe No 571 wall has been ordered down

Inspector.

THE BUILDING LAW REQUIRES:

- 1st—All stone walls must be properly bonded.
- 2d—All skylights having a superficial area of more than 9 square feet must be of iron and glass.
- 3d—All buildings over two stories or above 25 feet in height, *except dwellings, school houses, and churches,* on streets less than 30 feet wide, must have iron shutters on every window and opening above the 1st story. The front windows on streets over 30 feet wide are exempted.
- 4th—Outside fire escapes are required on all dwelling houses over two stories in height, occupied or built to be occupied by two or more families on any floor above the first, and on dwellings more than four stories in height, occupied by three or more families above the first floor, and on office buildings, hotels and lodging houses, factories, mills, workshops, hospitals, asylums and schools, all to be constructed as follows:

BALCONIES MUST NOT BE LESS THAN THREE FEET WIDE.

BRACKETS must not be less than 1/2 x 1 1/2 inches wrought iron, placed edgewise, or 1 1/4 inch angle iron 1/4 inch thick, well braced, and not more than three feet apart, and the braces to brackets must be not less than 3/4 inch square wrought iron, and must extend two-thirds of the width of the respective brackets or balconies. In all cases the brackets must go through the wall, and be turned down three inches.

BRACKETS ON NEW BUILDINGS must be set as the walls are being built. When brackets are to be put on old houses, the part going through the wall shall not be less than one inch diameter, with screw nuts and washers not less than five inches square and 3/8 inch thick.

TOP RAILS.—The top rail of balcony must be 1 1/4 inch x 1 1/2 inch wrought iron or 1 1/2 inch angle iron 1/4 inch thick, and in all cases must go through the walls, and be secured by nuts and 4 inch square washers, at least 3/8 inch thick, and no top rail shall be connected at angles by the use of cast iron.

BOTTOM RAILS.—Bottom rails must be 1 1/4 inch x 3/4 inch wrought iron or 1 1/4 inch angle iron 1/4 inch thick, well ledged into the wall. In frame buildings the top rails must go through the studding and be secured on the inside by washers and nuts as above.

FILLING-IN BARS.—The filling-in bars must be not less than 1/2 inch round or square wrought iron, placed not more than 6 inches from centres, and well riveted to the top and bottom rails.

STAIRS.—The stairs in all cases must be not less than 18 inches wide, and constructed of 1/4 x 3 1/2 inch wrought iron sides or strings. Steps may be of cast iron of the same width of strings, or 3/8 inch round iron, double rungs, and well riveted to the strings. The stairs must be secured to a bracket on top and rest on and be secured to a bracket or extra cross bar at the bottom. All stairs must have a 3/4 inch hand rail of wrought iron, well braced.

FLOORS.—The flooring of balconies must be of wrought iron 1 1/2 x 3/8 inch slats placed not over 1 1/4 inches apart, and secured to iron battens 1 1/2 x 3/8 inch, not over three feet apart and riveted at the intersection. The openings for stairways in all balconies shall not be less than 20 inches wide and 36 inches long, and have no covers.

DROP LADDERS.—Drop ladders from lower balconies where required shall not be less than 14 inches wide, and shall be made of 1 1/2 x 3/8 inch sides and 3/8 inch rungs of wrought iron. In no case shall a drop ladder be more than 12 feet in length. In no case shall the ends of balconies extend more than nine inches over the brackets.

SCUTTLE LADDERS.—Ladders to scuttles shall be constructed in all cases the same as the stairs or step-ladders from balconies of fire escapes.

THE HEIGHT OF RAILING around balconies shall not be less than two feet nine inches.

No Fire Escape will be approved by this Bureau if not in accordance with above specifications.

- 5th—All walls must be coped with stone or terra cotta. If coped with stone, the stone must not be less than 2 1/2 inches thick; and if with terra cotta, the terra cotta must be made with proper lap joints.
- 6th—Roofs must be covered with fire-proof material.
- 7th—All cornices must be fire-proof.
- 8th—All FURNACE FLUES OF DWELLING HOUSES shall have at least eight inch walls on each side. No furnace flues shall be of less size than eight inches square, or four inches wide and sixteen inches long, inside measure. If preferred, the furnace flues may be made of cast iron or fire-clay pipe of proper size built in the walls, with an air space of not less than one inch between said pipes, and four inches of brick wall on the outside.
All flues not built for furnace or boiler flues must be altered to conform to the above requirements before they are used as such.
- 9th—No iron beam, lintel, or girder, intended to span an opening over eight feet, intended to support a wall, shall be used for that purpose, *until tested and approved as provided by law.*

B388

Form 2-1905.

L27

1485

Applicant must indicate the Building Line or Lines clearly and distinctly on the Drawings.

Office of the Borough President of the Borough of Manhattan,

3

In The City of New York.

THE BUREAU OF BUILDINGS FOR THE BOROUGH OF MANHATTAN,

Office, No. 220 FOURTH AVENUE,

S. W. Corner 18th Street.

1485

Plan No.

APPLICATION TO ALTER, REPAIR, ETC.

Application is hereby made to the Superintendent of Buildings of The City of New York, for the Borough of Manhattan, for the approval of the detailed statement of the specifications and plans herewith submitted, for the alteration or repairs of the building herein described. All provisions of the Law shall be complied with in the alteration or repair of said building, whether specified herein or not.

(Sign here)

O. Reissmann

The City of New York, Borough of Manhattan, May 28, 1906.

LOCATION AND DESCRIPTION OF PRESENT BUILDING.

- State how many buildings to be altered one
- What is the exact location thereof? (State on what street or avenue, the side thereof, the number of feet from the nearest street or avenue, and the name thereof) South side of 6th St. 225' west of Ave. C. #636
- How was the building occupied? Synagogue & Dwelling
How is the building to be occupied? front
- Is the building on front or rear of lot? front Is there any other building erected on lot or permit granted for one? no Size _____ x _____; height _____ How occupied? _____ Give distance between same and proposed building _____ feet.
- Size of lot? 21'6" feet front; 21'6" feet rear; 98 feet deep.
- Size of building which it is proposed to alter or repair? 21'6" feet front; 21'6" feet rear; 39 feet deep. Number of stories in height? 3 Height from curb level to highest point? 35 ft.
- Depth of foundation walls below curb level? 8 ft. Material of foundation walls? stone Thickness of foundation walls? front 24 inches rear 24 inches; side 24 inches; party _____ inches.
- Material of upper walls? brick If ashlar, give kind and thickness _____
- Thickness of upper walls :
Basement: front _____ inches; rear _____ inches; side _____ inches; party _____ inches.
1st story: " 12 " " 12 " " 12 " " " " "
2d story: " 12 " " 12 " " 12 " " " " "
3d story: " 12 " " 12 " " 12 " " " " "
4th story: " _____ " " _____ " " _____ " " " " "
5th story: " _____ " " _____ " " _____ " " " " "
6th story: " _____ " " flat " " _____ " " " " "
- Is roof flat, peak or mansard? flat

If the Front, Rear or Side Walls, or any portion thereof, are to be taken out and rebuilt, give definite particulars, and state in what manner :

47. Remove rear wall of second story.
 Support upper wall on 2-12" 31 1/2 J beams,
 on 16" x 16" x 8" granite templates on 16" x 16"
 bonded brick piers with 40" x 40" x 12" concrete
 base. Take out part of rear wall of present
extension for new extension. Support upper
part on 2-4" 6 lb. J. beams. Bld. new rear
extension. Enlarge present skylight on
extension. New fire escape on front of 1st

If altered Internally, give definite particulars, and state how the building will be occupied :

48. Remove + rebuild partitions + stair
cut opening in second floor.
Bld. W.C. comp. on 3rd story.
Trimmers for openings 2-3" x 10"
spruce, Headers 4" x 10" spruce.

Occupied as at present.

49. How much will the alteration cost? \$2500

If the Building is to be occupied as a Flat, Apartment or Lodging House, give the following particulars :

50. Is any part of building to be used as a store or for any other business purpose, if so, state for what?

	Cellar	Base-ment	1st Floor	2d Floor	3d Floor	4th Floor	5th Floor	6th Floor
51. How many families will occupy each?	-	-						
52. Height of ceilings?	-	-	-	-				

53. How basement to be occupied? _____
 How made water-tight? _____
54. Will cellar or basement ceiling be plastered? _____ How? _____
55. How will cellar stairs be enclosed? _____
56. How will cellar be occupied? _____
 How made water-tight? _____
57. Will shafts be opened or covered with louvre skylights full size of shafts? _____

 Size of each shaft? _____

58. Dimensions of water closet windows? _____
 Dimensions of windows for living rooms? _____
59. Of what materials will hall partitions be constructed? _____

60. Of what materials will hall floors be constructed? _____

61. How will hall ceilings and soffits of stairs be plastered? _____
62. Of what material will stairways be constructed? _____
 Give sizes of stair well holes? _____
63. If any other building on lot, give size; front _____; rear _____; deep _____;
 stories high _____; how occupied _____; on front or rear
 of lot _____; material _____
 How much space between it and proposed building? _____
64. How will floors and sides of water closets to the height of 16 inches be made waterproof? _____



65. Number and location of water closets: Cellar _____; 1st floor _____; 2d floor _____;
 3d floor _____; 4th floor _____; 5th floor _____; 6th floor _____;
66. This building will safely sustain per superficial foot upon the first floor _____ lbs.; upon 2d floor
 _____ lbs.; upon 3d floor _____ lbs.; upon 4th floor _____ lbs.; upon 5th floor
 _____ lbs.; upon 6th floor _____ lbs.; upon 7th floor _____ lbs.; upon 8th floor
 _____ lbs.

S. SABOVSKY

Owner, S. Sabovsky Address, 636 E. 6th St.
 Architect, O. Reissmann " 30 First St.
 Superintendent, owner "
 Mason, _____ "
 Carpenter, _____ "

636 E. 6th St.

SIXTH STR

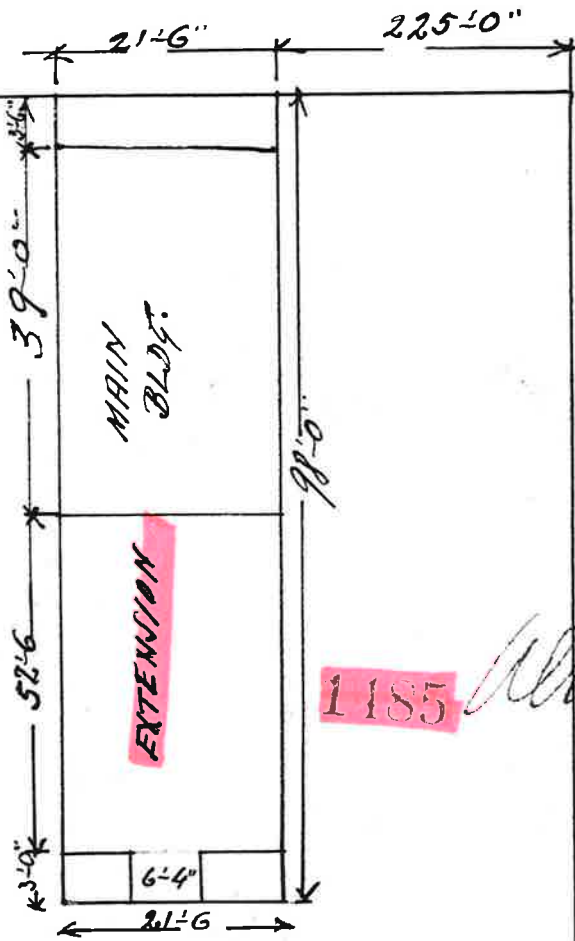

AVENUE C.

1185

Also

B388

Applicant must indicate the Building Line or Lines clearly and distinctly on the Drawings.

L27

Office of the Borough President of the Borough of Manhattan,

In The City of New York.

THE BUREAU OF BUILDINGS FOR THE BOROUGH OF MANHATTAN, Office, No. 220 FOURTH AVENUE, S. W. Corner 18th Street.

Plan No. 1491

APPLICATION TO ALTER, REPAIR, ETC.

Application is hereby made to the Superintendent of Buildings of The City of New York, for the Borough of Manhattan, for the approval of the detailed statement of the specifications and plans herewith submitted for the alteration or repairs of the building herein described. All provisions of the Law shall be complied with in the alteration or repair of said building, whether specified herein or not.

(Sign here)

Alfred L. Klose

THE CITY OF NEW YORK, BOROUGH OF MANHATTAN,

June 21 1909

LOCATION AND DESCRIPTION OF PRESENT BUILDING.

- 1. State how many buildings to be altered One
2. What is the exact location thereof? (State on what street or avenue, the side thereof, the number of feet from the nearest street or avenue, and the name thereof) 636 East 6th St. S.E. 235 ft. W. of Ave. C.
3. How was the building occupied? Synagogue
4. Is the building on front or rear of lot? front Is there any other building erected on lot or permit granted for one? no Size x ; height How occupied? Give distance between same and proposed building feet.
5. Size of lot? 21'0" feet front; 21'0" feet rear; 97' feet deep.
6. Size of building which it is proposed to alter or repair? 21'0" feet front; 21'0" feet rear; 95'0" feet deep. Number of stories in height? 3 Height from curb level to highest point? 35'0"
7. Depth of foundation walls below curb level? 10'0" Material of foundation walls? Stone Thickness of foundation walls? front 20 inches; rear 20 inches; side 20 inches; party inches.
8. Material of upper walls? Brick If ashlar, give kind and thickness
9. Thickness of upper walls: Basement: front inches; rear inches; side inches; party inches. 1st story: " 8 " " 8 " " 8 " " " " 2d story: " 8 " " 8 " " 8 " " " " 3d story: " 8 " " 8 " " 8 " " " " 4th story: " " " " " " " " " 5th story: " " " " " " " " " 6th story: " " " " " " " " "
10. Is roof flat, peak or mansard? flat no plumbing

If the Front, Rear or Side Walls, or any portion thereof, are to be taken out and rebuilt, give definite particulars, and state in what manner:

47. *Extend the present side & rear walls ^{of extension} up 9 ft. - same to 1 1/2" brick laid in cement mortar - windows in side wall as shown, skylights to ventilate & light interior - Roof to be tin*

If altered internally, give definite particulars, and state how the building will be occupied:

48. *Build 2'0" x 2'0" B. B. Piers in cellar - iron columns 8" to strengthen the building, remove present posts which rest on floor only*

49. How much will the alteration cost? *\$ 1750⁰⁰*

If the Building is to be occupied as a Flat, Apartment or Lodging House, give the following particulars:

50. Is any part of building to be used as a store or for any other business purpose, if so, state for what?

	Cellar	Base-ment	1st Floor	2d Floor	3d Floor	4th Floor	5th Floor	6th Floor
51. How many families will occupy each?								
52. Height of ceilings?	6'0"		8'6"	8'4"	8'0"			

53. How basement to be occupied? _____
 How made water-tight? _____
54. Will cellar or basement ceiling be plastered? _____ How? _____
55. How will cellar stairs be enclosed? _____
56. How will cellar be occupied? _____
 How made water-tight? _____
57. Will shafts be opened or covered with louvre skylights full size of shafts? _____
 Size of each shaft? _____

58. Dimensions of water closet windows? _____
 Dimensions of windows for living rooms? _____
59. Of what materials will hall partitions be constructed? _____

60. Of what materials will hall floors be constructed? _____

61. How will hall ceilings and soffits of stairs be plastered? _____
62. Of what material will stairways be constructed? _____
 Give sizes of stair well holes? _____
63. If any other building on lot, give size; front _____; rear _____; deep _____;
 stories high _____; how occupied _____; on front or rear
 of lot _____; material _____.
 How much space between it and proposed building? _____
64. How will floors and sides of water closets to the height of 16 inches be made waterproof? _____

65. Number and location of water closets: Cellar _____; 1st floor _____; 2d floor _____;
 3d floor _____; 4th floor _____; 5th floor _____; 6th floor _____;
66. This building will safely sustain per superficial foot upon the 1st floor _____ lbs.; upon 2d floor
 _____ lbs.; upon 3d floor _____ lbs.; upon 4th floor _____ lbs.; upon 5th floor
 _____ lbs.; upon 6th floor _____ lbs.; upon 7th floor _____ lbs.; upon 8th floor
 _____ lbs.

Owner, R. Sadowsky Address, 546 Broadway

Architect, A. C. K. Khor " 1 Beekman St.

Superintendent, " " " " " "

Mason, _____ " _____

Carpenter, _____ " _____

City of Manhattan,

City of New York.

BUREAU OF BUILDINGS FOR THE BOROUGH OF MANHATTAN,
Office, No. 220 FOURTH AVENUE,
S. W. Corner 18th Street.

The City of New York, July 23, 1909

Amendment to Application No. 1491 { Alt. B,
New B. 19 09.

Location 636 E. 6th St.

To take out the present front of building
and build new front wall of brick 12" thick cement mortar
return wall on gable anchored into present gable wall 12"
brick cement mortar level up present floor beams
and repair ceilings and etc., damaged.

Respectfully submitted,
Chickson

Construction
July 30
H. A. Reid
J. D. Poth

7/30 9

Edw. S. ...
7/10 9 H

THE BUREAU OF BUILDINGS FOR THE BOROUGH OF MANHATTAN,
Office, No. 220 FOURTH AVENUE,
S. W. Corner 18th Street.

The City of New York, aug. 13, 1909.

Amendment to Application No. 1491

{ *Alt. B.*
~~NEW YORK~~, 19 09.

Location 636 E. 6th St.

To hang balcony on 10" - I. beams 1" round iron hangers
balconey braced at floor line with tie rods running through the
building.

Reducing the size of balcony in front taking out the centre
and continuning I. beams to front wall to support same to bear on
bonded brick piers.

Bonded brick piers built as shown to carry front balcony
supporting I. beams

Changes made to strengthen the support of balcony and make
exits from same better.

- X #6. Details of hangers connection to beams filed.
- #7. Steel beams will be securely braced sideise rods and anchors
- #8. Where floor is leveled up the wall is strengthened by a 2'
pier in centre of building anchored into wall and tie rods run
through wall and acrusse the building through opposite 12"
wall ⁱⁿ the wall is further strengtheesed by new 12" wall in front
return and 2' ^{at rear.} at rear., the well of old stairway runs along
the wall and wall is not disturbed by taking out beams, old
floor was insecure and building is materially strengthened
by repairs. defective beams removed and new ones being
put in there places.

8/20/09
This is to certify that the above is a true and correct copy of the original of the same as filed in the office of the Bureau of Buildings for the Borough of Manhattan, New York, on the 13th day of August, 1909.
By *Bernard J. Conway*
Chief Clerk & Asst. Secy.

respectfully submitted,

At Keller

Office of the Borough Engineer
In The City of New York.

THE BUREAU OF BUILDINGS FOR THE BOROUGH OF MANHATTAN,
Office, No. 220 FOURTH AVENUE,
S. W. Corner 18th Street.

The City of New York, Sept. 14, 1909. 19

Amendment to Application No. 1491 { *Alt. B,*
~~NEW YORK~~ 19 09.

Location 636 E. 6th St.

To put in 3 windows on 1st floor,

3 windows on 2nd floor,

3 windows on 3rd floor, front ^{gable} wall west side.

2 - 4" I. beams 7.5 lbs., over each windows, bolted together and securely anchored in wall.

Respectfully submitted

A. L. ...

9/16/09
Dis
Edw. ...

and re considered
u
u

9/23 9

instrument
not as
in use as part of ...
at need
J. P. Roth

Received by
Edw. ...
9/27/09

DEPARTMENT OF HOUSING AND BUILDINGS
BOROUGH OF Manhattan, CITY OF NEW YORK

MANHATTAN
Municipal Bldg.,
Manhattan

BROOKLYN
Municipal Bldg.,
Brooklyn

BRONX
Bronx County Bldg.,
Grand Concourse & E. 161st St.

QUEENS
120-55 Queens Blvd.,
Kew Gardens

RICHMOND
Boro Hall,
St. George, S. I.

AUG 4 1943

NOTICE—This Application must be TYPEWRITTEN and filed in QUADRUPLICATE, and one copy sworn to by Applicant. If Elevator or Plumbing Applications are filed herewith, one affidavit is sufficient for all.

AFFIDAVIT

FORM A

1943

APPLICATION No. **717** BLOCK **388** LOT **37**

Give Street No. and LOCATION **636 East 6th. Street S.S. E. 6th. St.**

FEEs REQUIRED FOR

TO THE BOROUGH SUPERINTENDENT:

Application is hereby made for approval of the plans and specifications herewith submitted and to be made a part hereof for the structure herein described, with the understanding that:

If this application shall be disapproved in part and if no further action is taken thereon within one year after notice of partial disapproval, it shall be automatically withdrawn.

Any permit issued under which no work is commenced within one year from the time of issuance shall expire by limitation. (Administrative Code C26-177.0).

Work will be supervised by Licensed Architect, Professional Engineer or by a Superintendent of Construction who has had ten years' experience supervising building construction and who has been properly qualified. (Adm. Code C26-187.0).

Work under this approval will not be commenced until a permit has been obtained, application for which will be filed with the Borough Superintendent, accompanied by satisfactory evidence that compensation insurance has been obtained in accordance with the provisions of the Workmen's Compensation Law. (Adm. Code C26-161.0).

EXAMINED AND RECOMMENDED FOR APPROVAL ON **Aug 17 1943**

[Signature]
Examiner

APPROVED **194**

Borough Superintendent

STATE AND CITY OF NEW YORK }
COUNTY OF **New York** } ss.:

Harry Hurwit

(Typewrite name)

being duly sworn, deposes and says: That he resides at **213 West 70th. St**
in the City of **New York**, in the Borough of **Manhattan**

in the State of **New York**, that he is making this application for the approval of plans and specifications herewith submitted and made part hereof, for the building therein described. Deponent further says that he has personally supervised the preparation of the **architectural**

(Architectural, Structural or Mechanical, etc.)

plans and that to the best of his knowledge and belief, the work will be carried out in compliance therewith, and the structure, if built in accordance with such plans, will conform with all the provisions of the Building Code of the City of New York and with the provisions of all other laws and regulations applicable thereto in effect on this date.

Rabbi Mordchai Liebowicz
Cong. S. & T. Levishe Mordchai

(Name of Owner or Lessee)

Deponent further says that he is duly authorized by **their** owner in fee of all that certain lot, piece or parcel of land, shown on the diagram annexed hereto and made a part hereof, to make application for the approval of such detailed statements of specifications and plans, elevator or plumbing work (if any) and amendments thereto, in the **their** behalf.

(Owner's or Lessee's)

Deponent further says that the full names and residences, street and number, of the owner or owners of the said land, and also of every person interested in said building or proposed structure are as follows:

Owner **Cong. S. & T. Levishe Mordchai** **636 E. 6th. St. NY**

(If a Corporation, give full name and addresses of at least two officers)

Rabbi Mordchai Liebowicz **639 E. 6th St. N.Y.**

Lessee Address

Architect **HARRY HURWIT** Address **213 West 70th. St NY**

Engineer Address

Superintendent Address

DEPARTMENT OF HOUSING AND BUILDINGS
BOROUGH OF Manhattan, CITY OF NEW YORK

NOTICE—This application must be typewritten and filed in quadruplicate. All proposed work under this application must be shown on plans and section. All vertical lines of soil, waste, leader and refrigerator pipes should be designated by numbers or letters. A soil or waste line and its attendant vent line may be considered as one stack, and so numbered or lettered. In alterations, NEW WORK ONLY should be specified. When new fixtures are to be connected to present lines, the location and diameter of said lines must be shown on the plan. Minor alterations in connection with work described may be included in this form.

PLUMBING, MECHANICAL EQUIPMENT AND TANK INSTALLATION


APPLICATION No. **637** LOCK **388** LOT **37**
Street No. and LOCATION **636 East 6th Street S.S.E. 6th Street**
FEES REQUIRED FOR N.B. ALT. No. **717** 194 **3**
Owner **Cong. S&T. Louishe Mordchal** Address **636 East 6th Street NY**
Pres. **Rabbi Mordchal Liebowicz** Vice Pres. **639 E 6TH ST. N.Y.**
Lessee _____ Address _____
Pres. _____ Vice Pres. _____
Architect **Harry Hurwit** Address **213 W. 70th St NY**
Contractor _____ Address _____

COMPENSATION INSURANCE has been secured in accordance with the requirements of the Workmen's Compensation Law as follows:

To The Borough Superintendent: City of New York, **Aug. 4th**, 19**43**

Application is hereby made on behalf of the owner-lessee for approval of the plans and specifications herewith submitted, and made a part hereof, for the erection, alteration or installation of the building therein described,—with the understanding that if no work is performed hereunder within one year from the date of issuance, this approval shall expire by limitation as provided by law; and the applicant agrees to comply with the Building Code and all rules and regulations applicable thereto in effect at this date.

Applicant (Sign Here) *Harry Hurwit*
Examined and Recommended for Approval on **Sept 3** 19**43**
APPROVED _____ 19 _____
Borough Superintendent



Work Included Herein: Plumbing? **Yes** Sprinkler? **No** Standpipe? **No** Fuel Oil? **No** Gasoline Tank Installation or Fuel Oil (Bulk)? **No**
1. State in detail the work proposed **Install new bathtub- sink-washbasin, toilet**
Is this a new or old building? **old**
Give character of construction **nonfireproof** Class: _____
Dimensions: Stories High **3** Feet High **35** Feet Front **21'0** Feet Deep **94'0**
How occupied **Synagogue** No. of Families **Rabbi's apartment**
Is application made to remove a violation or order of any Dept.? **No** Give No. _____
How to be occupied **same**
Estimated Cost **\$200-**

PLUMBING SPECIFICATIONS

Describe special equipment or features: _____
Sewage and Drainage Disposal: Combined **yes** Sanitary _____ Storm _____ Cesspool _____
How will flushometers be water supplied? From a street pressure, pressure tank or roof tank? _____
Will building be piped for gas? **No** Describe purpose **Gas range**
Air Conditioner _____ How will waste be disposed of? **sewer**
Table of fixtures to include fixtures reset where new roughing is installed.
Size of House Sewer **4"** Fall per foot **1/4"**
No. of Soil Lines **pres. 1** No. of Waste Lines _____ No. of Vent Lines **pres. 1**

DEPARTMENT OF HOUSING AND BUILDINGS

BOROUGH OF MANHATTAN, CITY OF NEW YORK

MANHATTAN
Municipal Bldg.,
Manhattan

BROOKLYN
Municipal Bldg.,
Brooklyn

QUEENS
120-35 Queens Blvd.,
Kew Gardens, L. I.

RICHMOND
Boro Hall,
St. George, S. I.

NOTICE—This Application must be **TYPED** and filed in **QUADRUPPLICATE**.

ALTERED BUILDING

ALT. APPLICATION No. **717** BLOCK **388** LOT **27**

LOCATION **636 East 6th Street S.S. E. 6th Street**

DISTRICT (Under Building Zone Resolution) USE **BUS.** HEIGHT **1 1/2** AREA **B.**

EXAMINED AND RECOMMENDED FOR APPROVAL ON

Aug 18 1943 *J. Cohen*

Examiner.

APPROVED **194**

Borough Superintendent.

SPECIFICATIONS

- (1) NUMBER OF BUILDINGS TO BE ALTERED
Any other building on lot or permit granted for one?
Is building on front or rear of lot?
- (2) ESTIMATED COST OF ALTERATION: \$
- (3) PROPOSED OCCUPANCY:
(NOTE: If a multiple dwelling, authorization of owner must be filed.)

O.K. to examine for work
One shown only
Front \$2500.
Synagogue
Subject to city order
S.M.B.

STORY (Include cellar and basement)	BEFORE ALTERATION			AFTER ALTERATION						
	APTS.	ROOMS	USE	LIVE LOAD	NO. OF PERSONS			APTS.	ROOMS	USE
			MALE		FEMALE	TOTAL				
cellar			boiler rm. & storage							boiler rm. and storage same
1st.			Synagogue							Synagogue
2nd.			Balcony							Balcony
3rd.	1	4	Rabbi's apt.					1	4	Rabbi's apt.

(4) SIZE OF EXISTING BUILDING: At street level **21'0** feet front **94'0** feet deep **21'0** feet rear
At typical floor level **21'0** feet front **44'0** feet deep **21'0** feet rear
Height¹ **three** stories **35'0** feet

(5) SIZE OF BUILDING AS ALTERED: At street level feet front feet deep feet rear
At typical floor level **SAME** feet front **SAME** feet deep **SAME** feet rear
Height¹ feet stories feet

If volume of building is to be increased, give the following information:

(6) AREA² OF BUILDING AS ALTERED: At street level Total floor area² sq. ft.
(7) TOTAL HEIGHT³ Cubic Contents⁴ cu. ft.

1. The term "height" of a structure shall mean the vertical distance from the curb level to the highest point of the roof beams in the case of flat roofs or to a point at the average height of the gable in the case of roofs having a pitch of more than one foot in four and one-half, except that in the case of structure where the grade of the street has not been legally established or where the structure does not adjoin the street, the average level of all the ground adjoining such structures shall be used instead of the curb level.
2. In computing this area, measurement shall be taken to the outside surfaces of exterior walls at each floor. Courts, yards, etc., shall be excluded. The areas of cellars and basements shall not be included.
3. Total height shall be measured from 6 inches below the lowest finished floor to the outside of the roof, and in case of sloping roofs, to the average height.
4. The cubical contents is the actual space enclosed within the outer surfaces of the outside walls and between the outer surface of the roof and six inches below the surface of the lowest floors. This includes the cube of dormers, penthouses, vaults, pits, enclosed porches, and other enclosed appendages. Outside steps, terraces, footings, courts, yards, light shafts and buildings detached from the main structure are not to be included. (Detached structures are to be separately computed.)