

B
D
L
20
21

Application is hereby made to erect one building as per subjoined detailed statement of specification for erection of Buildings, and do herewith submit Plans and Drawings of such proposed building and do hereby agree that the provisions of the Building Law will be complied with whether the same are specified herein or not.

NEW YORK, May 16th 1890.

(Sign here) G. Fred Schaus Arch

1. State how many buildings to be erected. Nine
2. How occupied? If for dwelling, state the number of families. 7 Apartments for 20 families two 18 families 2 1/2
3. Where is the street or avenue and the number thereof? Give diagram of property. South side 14th St 88 ft West of Ave C.
4. Size of lot. No. of feet front, 244.0; No. of feet rear, 244.0; No. of feet deep, 103.3
Size of building. No. of feet front, 127.0 27.6; No. of feet rear, 127.0 27.6; No. of feet deep, 91.0
No. of stories in height, 5; No. of feet in height from curb level to highest point of roof beams, 57'6"
6. What will each building cost exclusive of the lot? \$ 20,000
7. What will be the depth of foundation walls from curb level or surface of ground? 8+10 feet
8. Will foundation be laid on earth, sand, rock, timber or piles? Piles
9. What will be the base, stone or concrete? Stone If base stones, give size and thickness and how laid. 9"x36" laid in Cement If concrete, give thickness. -
10. What will be the sizes of piers? Two end houses 24"x24" + one 24"x64"
11. What will be the sizes of the base of piers? " " 36"x36" + " 36"x88"
12. What will be the thickness of foundation walls? 24" Of what material constructed? Rubble Stone laid in Cement Mortar
13. What will be the thickness of upper walls? Basement, 24 inches; 1st story, 16 inches; 2d story, 12 inches; 3d story, 12 inches; 4th story, 12 inches; 5th story, 12 inches; 6th story, - inches; 7th story, - inches, and from thence to top 8 inches. Of what materials to be constructed? Hard brick
14. State whether independent or party walls. Outside walls of end houses Ind. others Party
15. With what material will walls be coped? Blue Stone or Earthenware
16. What will be the materials of front? Bk + Stone If of stone, what kind? Brown Stone
Give thickness of ashlar 4" Bk + 1" St on sloven houses Give thickness of backing in each story. 20"x16" Bk.
17. Will the roof be flat, peaked or mansard? Flat.
18. What will be the materials of roofing? Tin
19. Give size and materials of floor beams. 1st tier, Spruce 3x10; 2d tier, Spruce 3x10; 3d tier, Spruce 3x10; 4th tier, Spruce 3x10; 5th tier, Spruce 3x10; 6th tier, -; 7th tier, -; 8th tier, -; roof tier, Spruce 3x9
State distances from centres. 1st tier, 16 inches; 2d tier, 16 inches; 3d tier, 16 inches; 4th tier, 16 inches; 5th tier, 16 inches; 6th tier, - inches; 7th tier, - inches; 8th tier, - inches; roof tier, 20 inches.
20. If floors are to be supported by columns and girders, give the following information: Size and material of girders under 1st floor, Spruce 8x10 under each of the upper floors, -
Size and materials of columns under 1st floor. Bk Piers 12x16 under each of the upper floors, -
21. If the front, rear or side walls are to be supported, in whole or in part, by iron girders or lintels, give definite particulars. Chout wall above 1st story of end houses carried on two 10 1/2" 105 lb rolled iron beams properly spaced and bolted together
22. If girders are to be supported by brick piers and columns, state the sizes of piers and columns. Girders supported by one 12"x12" + one 8"x12" cast iron cols at ends and two intermediate cols 6"x12" with cap + sole plates complete
23. State by whom the construction of the building is to be superintended. Owner

1. State how many families are to occupy each floor, and the whole number in the house; also, if any part is to be used as a store or for any other business purposes, state the fact, *four families on each floor & janitor except two houses on 1st floor which have 2 fam & 2 stores*
2. What will be the heights of ceilings? 1st story *13' 10"* feet; 2d story, *9' 4"* feet; 3d story, *9' 4"* feet; 4th story, *9' 4"* feet; 5th story, *9' 4"* feet; 6th story, _____ feet; 7th story, _____ feet.
3. How are the hall partitions to be constructed and of what materials? *Ordinary stud partitions*

Owner *Wm H. Muldon* Address *30 East 81st St*
 Architect *G. F. Felham* Address *1481 Bway*
 Mason _____ Address _____
 Carpenter _____ Address _____

IF A WALL OR PART OF A WALL ALREADY BUILT IS TO BE USED, FILL UP THE FOLLOWING.

The undersigned give notice that _____ intend to use the _____ wall of building _____ as party wall in the erection of the building hereinbefore described, and respectfully requests that the same be examined and a permit granted therefor. The foundation wall _____ built of _____ inches thick, _____ feet below curb; the upper wall _____ built of _____ inches thick, _____ feet deep, _____ feet in height.

(Sign here) _____

NOTE.—In making application for the erection of buildings the following drawings must be furnished: Plans of each and every story, front, rear and side elevations, and longitudinal and transverse sections. All plans must be drawn to a uniform scale and must be on tracing cloth, properly designated and colored.

THE BUILDING LAW REQUIRES:

- 1st—All stone walls must be properly bonded.
- 2d—All skylights having a superficial area of more than 9 square feet must be of iron and glass.
- 3d—All buildings over two stories or above 25 feet in height, *except dwellings, school houses, and churches,* on streets less than 30 feet wide, must have iron shutters on every window and opening above the 1st story. The front windows on streets over 30 feet wide are exempted.
- 4th—Outside fire escapes are required on all dwelling houses over two stories in height, occupied or built to be occupied by two or more families on any floor above the first, and on dwellings more than four stories in height, occupied by three or more families above the first floor, and on office buildings, hotels and lodging houses, factories, mills, workshops, hospitals, asylums and schools, all to be constructed as follows:

BRACKETS must not be less than $\frac{1}{4} \times 1\frac{3}{4}$ inches wrought iron, placed edgewise, or $1\frac{1}{2}$ inch angle iron $\frac{1}{4}$ inch thick, well braced, and not more than three feet part, and the braces to brackets must be not less than $\frac{3}{4}$ inch square wrought iron, and must extend two-thirds of the width of the respective brackets or balconies. In all cases the brackets must go through the wall, and be turned down three inches.

BRACKETS ON NEW BUILDINGS must be set as the walls are being built. When brackets are to be put on old houses, the part going through the wall shall not be less than one inch diameter, with screw nuts and washers not less than five inches square and $\frac{1}{2}$ inch thick.

TOP RAILS.—The top rail of balcony must be $1\frac{3}{4}$ inch \times $\frac{1}{2}$ inch wrought iron, or $1\frac{1}{2}$ inch angle iron $\frac{1}{4}$ inch thick, and in all cases must go through the walls, and be secured by nuts and 4 inch square washers, at least $\frac{3}{8}$ inch thick, and no top rail shall be connected at angles by the use of cast iron.

BOTTOM RAILS.—Bottom rails must be $1\frac{1}{4}$ inch \times $\frac{3}{8}$ inch wrought iron, or $1\frac{1}{2}$ inch angle iron $\frac{1}{4}$ inch thick, well leaded into the wall. In frame buildings the top rails must go through the studding and be secured on the inside by washers and nuts as above.

FILLING-IN BARS.—The filling-in bars must be not less than $\frac{1}{2}$ inch round or square wrought iron, placed not more than 6 inches from centres, and well riveted to the top and bottom rails.

STAIRS.—The stairs in all cases must be not less than 18 inches wide, and constructed of $\frac{1}{4} \times 3\frac{1}{2}$ inch wrought iron sides or strings. Steps may be of cast iron of the same width of strings, or $\frac{3}{8}$ inch round iron, double rungs, and well riveted to the strings. The stairs must be secured to a bracket on top and rest on and be secured to a bracket or extra cross bar at the bottom. All stairs must have a $\frac{3}{4}$ inch hand rail of wrought iron, well braced.

FLOORS.—The flooring of balconies must be of wrought iron $1\frac{1}{2} \times \frac{3}{8}$ inch slats placed not over $1\frac{1}{4}$ inches apart, and secured to iron battens $1\frac{1}{2} \times \frac{5}{8}$ inch, not over three feet apart and riveted at the intersection. The openings for stairways in all balconies shall not be less than 20 inches wide and 36 inches long, and have no covers.

DROP LADDERS.—Drop ladders from lower balconies where required shall not be less than 14 inches wide, and shall be made of $1\frac{1}{2} \times \frac{3}{8}$ inch sides and $\frac{5}{8}$ inch rungs of wrought iron. In no case shall a drop ladder be more than 12 feet in length. In no case shall the ends of balconies extend more than nine inches over the brackets.

SCUTTLE LADDERS.—Ladders to scuttles shall be constructed in all cases the same as the stairs or step-ladders from balconies of fire escapes. The height of railing around balconies shall not be less than two feet nine inches.

No Fire Escape will be approved by this Bureau if not in accordance with above specifications.

- 5th—All walls must be coped with stone or terra cotta. If coped with stone, the stone must not be less than $2\frac{1}{2}$ inches thick; and if with terra cotta, the terra cotta must be made with proper lap joints.
- 6th—Roofs must be covered with fire-proof material.
- 7th—All cornices must be fire-proof.
- 8th—All FURNACE FLUES OF DWELLING HOUSES shall have at least eight inch walls on each side. No furnace flues shall be of less size than eight inches square, or four inches wide and sixteen inches long, inside measure. If preferred, the furnace flues may be made of cast iron or fire-clay pipe of proper size built in the walls, with an air space of not less than one inch between said pipes, and four inches of brick wall on the outside.
 All flues not built for furnace or boiler flues must be altered to conform to the above requirements before they are used as such.
- 9th—No iron beam, lintel, or girder, intended to span an opening over eight feet, intended to support a wall, shall be used for that purpose, *until tested and approved* as provided by law.

REPORT UPON APPLICATION.

Fire Department, City of New York,

BUREAU OF INSPECTION OF BUILDINGS,

NEW YORK, 18

To the Superintendent of Buildings:

I respectfully report that I have thoroughly examined and measured the wall....., etc., named in the foregoing application, and found the foundation wall.....to be built of..... inches thick,feet below curb, the upper wall..... built of..... inches thick,feet deep.feet in height, and that the mortar in said wall.....is..... hard and good, and that the wall.....built as party wall.....and.....in a good and safe condition.

What is the nature of the ground?.....

What kind of sand was used in the mortar?.....

(The Inspector must here state what defects, if any, are in the wall

(The " " state the thickness of wall in each and every story.)

.....

..... Inspector.

FINAL REPORT OF INSPECTOR.

NEW YORK, 1893

To the Superintendent of Buildings:

Work was commenced on the within described building on the 28 day of May 1890 and completed on the 31 day of June 1893, and all the iron girders, beams and columns are properly set, and of size as per application, and all the work upon said building has been done in accordance with the foregoing detailed statement, except as noted below.

Respectfully submitted,

James Duffey Inspector.

REMARKS.

.....

Original

Fire Department, City of New York.

Bureau of Inspection of Buildings.

Detailed Statement of Specification FOR NEW BUILDINGS.

No. 882 Submitted May 16^c 18 90

LOCATION.

14th Street, South Side.

88 feet West of Ave C.

Owner Mrs. Muldoon.

Architect Geo F Pelham.

Builder _____

Received by _____ 18

Returned by _____ 18

Report..... favorable.

Referred to Inspector S. Davis

May 28. 1890

Returned _____ 18

Inspector.

Plans filed.
NEW YORK May 20 1890

This is to certify that I have examined the within detailed statement, together with the copy of the plans relating thereto, and find the same not to be in accordance with the provisions of the laws relating to Buildings in the city of New York, that the same has been Dis approved, and entered in the records of this Bureau.

Geo. M. McLeod
Op
Superintendent of Buildings.

Amended. May 28th 1890

Pier over front door, ~~is~~ to
be carried by 3 rowlock
arch.

Pier P. to be built under
centre of column.

Geo F. Pelham,
for G. & S. Godwin.

Approved
Emile Melame
Op. Supv. Bldgs
May 28th 1890

May 30th 1890

Geo. C. Cent. H.

Permit # 7011, Health Dept.
Dated, April 22, 1890

DEPARTMENT OF HOUSING AND BUILDINGS

BOROUGH OF MANHATTAN, CITY OF NEW YORK

MANHATTAN Municipal Bldg., Manhattan

BROOKLYN Municipal Bldg., Brooklyn

BRONX Bronx County Bldg., Grand Concourse & E. 161st St.

QUEENS 21-10 49th Avenue, L. I. City

RICHMOND Boro Hall, St. George, S. I.

NOTICE—This Application must be TYPEWRITTEN and filed in TRIPLICATE

BUILDING NOTICE

APPLICATION FOR MINOR STRUCTURES, MINOR ALTERATIONS AND REPAIRS, ELEVATOR REPAIRS, DROP CURB, FIRE ESCAPES, MISCELLANEOUS STATE WHICH

APPLICATION No. 3405 194 Block 396 Lot 25

LOCATION 636 East 14th Street (Give Street Number)

FEES REQUIRED FOR

DISTRICT (under building zone resolution) Use Height Area

STATE AND CITY OF NEW YORK, COUNTY OF New York ss.:

Harry Silverman being duly (Typewrite Name of Applicant)

sworn deposes and says: That he resides at 17 East 48th Street Borough of Manhattan

City of New York; that he is the agent for the (owner-lessee) of the premises above described, and is duly authorized to make this application for approval of the plans and specifications here-with submitted, and made a part hereof, for the work to be done in the building therein described,—with the understanding that if no work is performed hereunder within one year from the time of issuance, this approval shall expire by limitation as provided by law; and the applicant agrees to comply with all provisions of the Building Code and all laws and regulations applicable to the erection or alteration of said structure in effect at this date; that the work to be done is duly authorized by the owner.

Deponent further says that the full names and residences of the owners or lessees of said premises are:

Owner Teenfour Corp. David Cohen, Pres. Address 157 Manhattan Ave. Sol. Cohen, Sect. Address 157 Manhattan Ave.

Sworn to before me this 11 day of Sept 1940 (Sign here) Harry Silverman Applicant

Notary Public or Commissioner of Deeds If Licensed Architect or Professional Engineer, affix seal.

COMPENSATION INSURANCE has been secured in accordance with the requirements of the Workmen's Compensation Law as follows:

State proposed work in detail: It is proposed to construct new partitions for new water closet compartments, two on every floor, with new windows, as shown on the accompanying plan. ALL NEW PARTITIONS WILL BE STUD AND PLASTER


Handwritten notes: 1. Partitions must be stud and plaster 2. Show comp. policy Gorman

Is this a new or old building? old. If old building, give character of construction non-fireproof Number of stories high 5 How occupied Class A. Multiple Dwelling Old Law Tenement. Is application made to remove a violation? yes How to be occupied Class A Multiple Dwelling Old Law Tenement Cost \$ 400.

9-13-40 Copy to E. J. J. J. J.

9-13-40

REMARKS OR SKETCH:

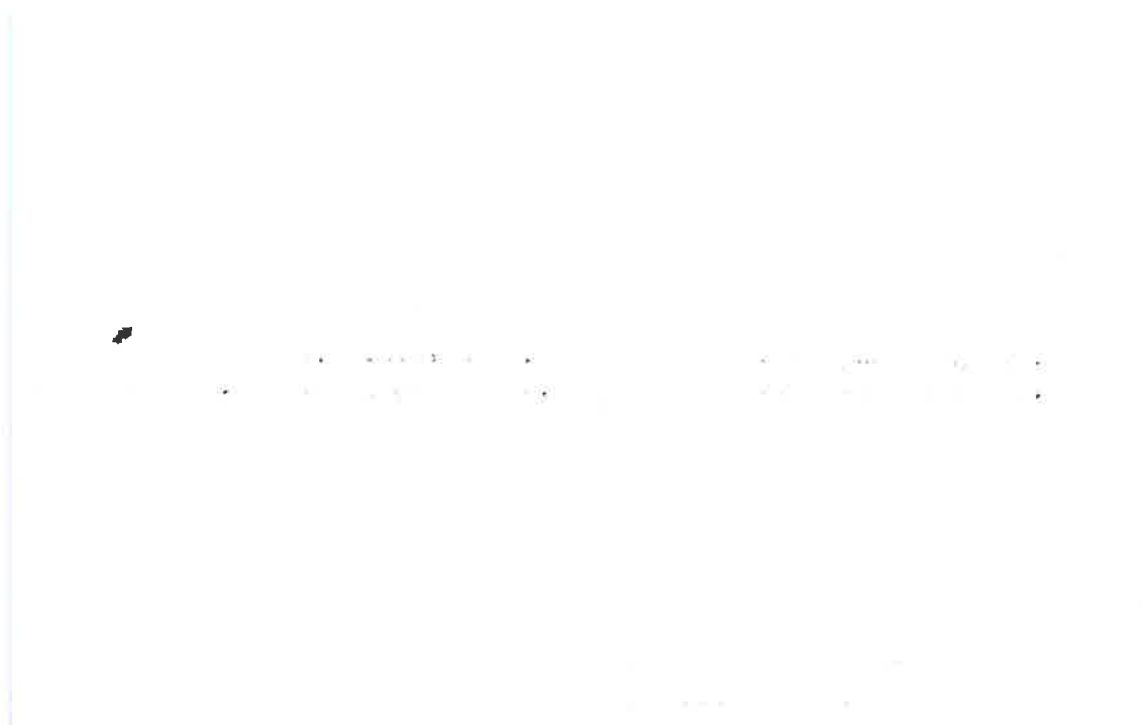

If this application is for Drop Curb Permit, DIAGRAM showing plot to be used, the relative position of the cut curb and the extent thereof, must be drawn above.

Cut curb.....Length in Feet.....Total Splay.....Length in Feet.....

Deposit (\$.....), either in cash or certified check, payable to the order of the Department of Housing and Buildings, to insure the proper construction of the sidewalk and curb.

Refer to N.B. ALT.....194

EXAMINED AND RECOMMENDED

For Approval on 9/17/1940 N.J. Somers Examiner

Approved SEP 17 1940 Chester W. Campbell Borough Superintendent

Work commenced.....Date signed off.....194

I hereby Certify that the above report is true in every respect and that the work indicated has been done in the manner required by the Rules and Regulations of this Department, except where reported adversely.

Signed..... Inspector

DEPARTMENT OF HOUSING AND BUILDINGS

BOROUGH OF ~~MANHATTAN~~, CITY OF NEW YORK

No. 40253

Date September 23, 1952

CERTIFICATE OF OCCUPANCY

(Standard form adopted by the Board of Standards and Appeals and issued pursuant to Section 646 of the New York Charter, and Sections C.26-181.0 to C.26-187.0 inclusive Administrative Code 2.1.3.1. to 2.1.3.7. Building Code.)

This certificate supersedes C. O. No.

To the owner or owners of the building or premises:

THIS CERTIFIES that the new ~~erected~~ existing building premises located at
628 West 14th Street

Block 396 Lot 21

, conforms substantially to the approved plans and specifications, and to the requirements of the building code and all other laws and ordinances, and of the rules and regulations of the Board of Standards and Appeals, applicable to a building of its class and kind at the time the permit was issued; and

CERTIFIES FURTHER that, any provisions of Section 646F of the New York Charter have been complied with as certified by a report of the Fire Commissioner to the Borough Superintendent.

~~Alt. No.~~ Alt. No.— 55-1950

Construction classification— ~~nonfireproof~~ Class 3

Occupancy classification— ~~Class "A" Mult. Dwell.~~ Old Law Tenement Height 5 stories, 50 feet.

Date of completion— September 17, 1952 . Located in Restricted Retail Use District.

B Area 2 . Height Zone at time of issuance of permit 2512-1950

This certificate is issued subject to the limitations hereinafter specified and to the following resolutions of the Board of Standards and Appeals: (Calendar numbers to be inserted here)

PERMISSIBLE USE AND OCCUPANCY

STORY	LIVE LOADS Lbs. per Sq. Ft.	PERSONS ACCOMMODATED			USE
		MALE	FEMALE	TOTAL	
Cellar	on ground				boiler room and storage.
1st story	100			10	Three (3) apartments and one (1) store.
2nd to 5th story, incl.	40 each				Four (4) apartments on each story.

Joseph E. Herman
Borough Superintendent.