

FORM No. 2.—1888.

Plan No. 1173

Original

BUREAU INS. OF BUILDINGS

Received JUN 7 1888

**B
L**

439

APPLICATION TO ALTER, REPAIR, ETC.

Application is hereby made to alter as per subjoined detailed statement of specification for Alterations, Additions or Repairs to buildings already erected, and I herewith submit Plans and Drawings of such proposed alterations; and I do hereby agree that the provisions of the Building Law will be complied with, whether the same are specified herein or not.

(Sign here)

G. Schmidt

NEW YORK, June 7 1888

1. State how many buildings to be altered, One
2. What is the street or avenue and the number thereof? Give diagram of property.
190 First Avenue betw 11 & 12 St
3. How much will the alteration cost, \$ 350.⁰⁰/₁₀₀

GIVE THE FOLLOWING INFORMATION AS TO THE PRESENT BUILDING :

1. Size of lot on which it is located, No. of feet front, 25; feet rear, 25; feet deep, 100
2. Size of building, No. of feet front, 25; feet rear, 25; feet deep, 50 No. of stories in height, 5; No. of feet in height, from curb level to highest point of beams, 50
3. Material of building, Brick; material of front, Brick
4. Whether roof is peak, flat, or mansard? Flat
5. Depth of foundation walls 10 feet; thickness of foundation walls, 20; materials of foundation walls, Brick & Stone
6. Thickness of upper walls, 18 inches. Material of upper walls, Brick
7. Whether independent or party-walls, Party Walls
8. How the building is or was occupied? as Tenement
Stone on first floor

IF TO BE RAISED OR BUILT UPON, GIVE THE FOLLOWING INFORMATION :

1. How many stories will the building be when raised?
2. How high will the building be when raised?
3. Will the roof be flat, peak, or mansard?
4. What will be the thickness of wall of additional stories? story, inches; story, inches.
5. Give size and material of floor beams of additional stories; 1st tier, x 2d tier, x Distance from centres on tier, inches; tier inches.
6. How will the building be occupied?

IF TO BE EXTENDED ON ANY SIDE, GIVE THE FOLLOWING INFORMATION :

1. Size of extension, No. feet front,; feet rear,; feet deep,; No. of stories in height,; No. of feet in height,
2. What will be the material of foundation walls of extension, What will be the depth, feet. What will be the thickness, inches.
3. Will foundation be laid on earth, sand, rock, timber or piles,

IF TO BE EXTENDED ON ANY SIDE, GIVE THE FOLLOWING INFORMATION :

4. What will be the base—stone or concrete?..... If base stones, give size and thickness and how laid..... If concrete, give thickness,.....
5. What will be the sizes of piers?..... What will be the sizes of the base of piers?.....
6. What will be the thickness of upper walls? 1st story,..... inches; 2d story,..... inches; 3d story..... inches; 4th story,..... inches; 5th story,..... inches; 6th story,..... inches; 7th story,..... inches; from thence to top,..... inches; and of what materials to be constructed,.....
7. Whether independent or party-walls; if party-walls, give thickness thereof,..... inches:
8. With what material will walls be coped?.....
9. What will be the materials of front?..... If of stone, what kind,..... Give thickness of front ashlar,..... and thickness of backing thereof,.....
10. Will the roof be flat, peak, or mansard?.....
11. What will be the materials of roofing?.....
12. Give size and material of floor beams. 1st tier,....., x.....; 2d tier,..... x.....; 3d tier,....., x.....; 4th tier,....., x.....; 5th tier,....., x.....; 6th tier,....., x.....; 7th tier,....., x.....; roof tier,....., x..... . State distance from centres on 1st tier,..... inches; 2d tier,..... inches; 3d tier,..... inches; 4th tier,..... inches; 5th tier,..... inches; 6th tier,..... inches; 7th tier,..... inches; roof tier,..... inches.
13. If floors are to be supported by columns and girders, give the following information: Size and material of girders under 1st floor,....., x..... under each of the upper floors,..... Size and material of columns under 1st floor,..... under each of the upper floors,.....
14. If the front, rear or side walls are to be supported, in whole or in part, by iron girders or lintels, give definite particulars,.....
15. If girders are to be supported by brick piers and columns, state the size of piers and columns.
16. How will the extension be connected with present or main building?.....
17. How will the extension be occupied? If for dwelling purposes, state how many families are to occupy each floor,.....
18. State who will superintend the alterations,.....

IF ALTERED INTERNALLY, GIVE DEFINITE PARTICULARS AND STATE HOW THE BUILDING WILL BE OCCUPIED :

IF THE FRONT, REAR, OR SIDE WALLS, OR ANY PORTION THEREOF, ARE TO BE TAKEN OUT AND REBUILT, GIVE DEFINITE PARTICULARS, AND STATE IN WHAT MANNER :

The only Alteration to be made is a New Stone Front, Supports carrying two front water not to be disturbed consisting of two New Show Windows not to project more than 12 inches from the front of the building and the bottom of the windows to be at least 18 inches above the curb stone

Owner,..... Address.....
 Architect..... Address.....
 Mason..... Address.....
 Carpenter Alois Schaefer Address 378 Eighth St. N.Y.

REPORT UPON APPLICATION.

BUREAU OF INSPECTION OF BUILDINGS.

NEW YORK, June 8th 1888

To the Superintendent of Buildings:

I respectfully report that I have thoroughly examined and measured the building, walls, &c., named in the foregoing application, and find the foundation wall.....to be built of brick 16" x 8" inches thick, 8 feet below curb, the upper wall built of brick 16" inches thick, 57' feet deep, 57' 4" feet in height, and that the mortar in said wall is good hard and good, and that all the walls are good in good and safe condition.

What is the nature of the ground? Earth

What kind of sand was used in the mortar? Sharp Sand

How is or was the building occupied? Store & dwelling

(The Inspector must here state what defects, if any, are in the walls, beams or other part of the building.)

(The " " state the thickness of each wall in each and every story.)

All walls and beams in good condition - no defects.
1st story 12"
2nd " 12"
3rd " 12"
4th " 12"
5th " 12"

Daniel O. Fole Inspector.

THE BUILDING LAW REQUIRES:

- 1st—All stone walls must be properly bonded.
- 2d—All skylights having a superficial area of more than 9 square feet must be of iron and glass.
- 3d—All buildings over two stories or above 25 feet in height, *except dwellings, school houses, and churches*, on streets less than 30 feet wide, must have iron shutters on every window and opening above the 1st story. The front windows on streets over 30 feet wide are exempted.
- 4th—Outside fire escapes are required on all dwelling houses over two stories in height, occupied or built to be occupied by two or more families on any floor above the first, and on dwellings more than four stories in height, occupied by three or more families above the first floor, and on office buildings, hotels and lodging houses, factories, mills, workshops, hospitals, asylums and schools, all to be constructed as follows:

BALCONIES MUST NOT BE LESS THAN THREE FEET WIDE.

BRACKETS must not be less than $\frac{1}{2}$ x $1\frac{1}{2}$ inches wrought iron, placed edgewise, or $1\frac{1}{2}$ inch angle iron, well braced, and not more than three feet apart, and the braces to brackets must be not less than $\frac{1}{2}$ inch square wrought iron, and must extend two-thirds of the width of the respective brackets or balconies. In all cases the brackets must go through the wall, and be turned down three inches.

BRACKETS ON NEW BUILDINGS must be set as the walls are being built. When brackets are to be put on old houses, the part going through the wall shall not be less than one inch diameter, with screw nuts and washers not less than five inches square and $\frac{1}{2}$ inch thick.

TOP RAILS—The top rail of balcony must be $1\frac{1}{2}$ inch x $\frac{1}{2}$ inch wrought iron, and in all cases must go through the walls, and be secured by nuts and 4 inch square washers, at least $\frac{1}{2}$ inch thick, and no top rail shall be connected at angles by the use of cast iron.

BOTTOM RAILS—Bottom rails must be $1\frac{1}{2}$ inch x $\frac{1}{2}$ inch wrought iron, well leaded into the wall. In frame buildings the top rails must go through the studding and be secured on the inside by washers and nuts as above.

FILLING-IN-BARS—The filling-in bars must be not less than $\frac{1}{2}$ inch round or square wrought iron, placed not more than 6 inches from centres, and well riveted to the top and bottom rails.

STAIRS—The stairs in all cases must be not less than 18 inches wide, and constructed of $\frac{1}{2}$ x $3\frac{1}{2}$ inch wrought iron sides or strings. Steps may be of cast iron of the same width of strings, or $\frac{1}{2}$ inch round iron, double rungs, and well riveted to the strings. The stairs must be secured to a bracket on top and rest on and be secured to a bracket or extra cross bar at the bottom. All stairs must have a $\frac{1}{2}$ inch hand rail or wrought iron, well braced.

FLOORS—The flooring of balconies must be of wrought iron $1\frac{1}{2}$ x $\frac{1}{2}$ inch slats placed not over $1\frac{1}{2}$ inches apart, and secured to iron battens $1\frac{1}{2}$ x $\frac{1}{2}$ inch, not over three feet apart and riveted at the intersection. The openings for stairways in all balconies shall not be less than 20 inches wide and 36 inches long, and have no covers.

DROP LADDERS—Drop ladders from lower balconies where required shall not be less than 14 inches wide, and shall be made of $1\frac{1}{2}$ x $\frac{1}{2}$ inch sides and $\frac{1}{2}$ inch rungs of wrought iron. In no case shall a drop ladder be more than 12 feet in length. In no case shall the ends of balconies extend more than nine inches over the brackets.

SCUTTLE LADDERS—Ladders to scuttles shall be constructed in all cases the same as the stairs or step-ladders from balconies of fire escapes.

THE HEIGHT OF RAILING around balconies shall not be less than two feet nine inches.

No Fire Escape will be approved by this Bureau if not in accordance with above specifications.

- 5th—All walls must be coped with stone or terra cotta. If coped with stone, the stone must not be less than $2\frac{1}{2}$ inches thick; and if with terra cotta, the terra cotta must be made with proper lap joints.
- 6th—Roofs must be covered with fire-proof material.
- 7th—All cornices must be fire-proof.
- 8th—All FURNACE FLUES OF DWELLING HOUSES shall have at least eight inch walls on each side, No furnace flue shall be of less size than eight inches square, or four inches wide and sixteen inches long, inside measure. If preferred, the furnace flues may be made of cast iron or fire-clay pipe of proper size built in the walls, with an air space of not less than one inch between said pipes, and four inches of brick wall on the outside.
 All flues not built for furnace or boiler flues must be altered to conform to the above requirements before they are used as such.
- 9th—No iron beam, lintel, or girder, intended to span an opening over eight feet, intended to support a wall, shall be used for that purpose, *until tested and approved* as provided by law.

1413

Form 2-900
B 439
L 5

Applicant must indicate the Building Line or Lines clearly and distinctly on the drawings.

Department of Buildings of The City of New York.

THOMAS J. BRADY,
President of the Board of Buildings and
Commissioner of Buildings for the Bor-
oughs of Manhattan and The Bronx.
*Office, No. 220 Fourth Avenue, S. W. cor. 18th Street,
Borough of Manhattan.*

JOHN GUILFOYLE,
Commissioner of Buildings for
the Borough of Brooklyn.
Office, Borough Hall, Borough of Brooklyn.

DANIEL CAMPBELL,
Commissioner of Buildings for the Bor-
oughs of Queens and Richmond.
*Office, Richmond Building, New Brighton, Staten Island,
Borough of Richmond.
Branch Office, Town Hall, Jamaica, Long Island,
Borough of Queens.*

Plan No. 1413

APPLICATION TO ALTER, REPAIR, ETC.

Application is hereby made to the Commissioner of Buildings of The City of New York, for the Borough of Manhattan & Bronx for the approval of the detailed statement of the specifications and plans herewith submitted, for the alteration or repair of the building herein described. All provisions of the Building Code shall be complied with in the alteration or repair of said building, whether specified herein or not.

(Sign here) *Bruno W. Berger*
BRUNO W. BERGER, ARCHITECT.
THE CITY OF NEW YORK,

BOROUGH OF Manhattan 6-12 190

LOCATION AND DESCRIPTION OF PRESENT BUILDING.

1. State how many buildings to be altered one
2. What is the exact location thereof? (State on what street or avenue; the side thereof, the number of feet from the nearest street or avenue, and the name thereof) 100 Fifth Avenue
East side from 75th St. to 117th St.
3. How was the building occupied? apartment
How is the building to be occupied? apartment
4. Is the building on front or rear of lot? front Is there any other building on the lot? no
If so, state size: _____ feet front; _____ feet rear; _____ feet deep; _____ stories high. How occupied? _____
5. Size of lot? 65 feet front; 25 feet rear; 100 feet deep.
6. Size of building which it is proposed to alter or repair? 25 feet front; 25 feet rear; 54 feet deep. Number of stories in height? 5 Height from curb level to highest point? 57-6.
7. Depth of foundation walls below curb level? 10'-6" Material of foundation walls? brick
Thickness of foundation walls? front 20 inches; rear 20 inches; side 20 inches; party 20 inches.
8. Material of upper walls? brick If ashlar, give kind and thickness _____
9. Thickness of upper walls:
Basement: front _____ inches; rear _____ inches; side _____ inches; party _____ inches.
1st story: " 12 " " 12 " " 12 " " 12 "
2d story: " 12 " " 12 " " 12 " " 12 "
3d story: " 12 " " 12 " " 12 " " 12 "
4th story: " 12 " " 12 " " 12 " " 12 "
5th story: " 12 " " " " " " " "
6th story: " " " " " " " "
10. Is roof flat, peak or mansard? flat

If the Front, Rear or Side Walls, or any portion thereof, are to be taken out and rebuilt, give definite particulars, and state in what manner :

45. *Part of front wall in rear to be removed to ... 8-6 with brick ...*
... 11-6 x 11-0 ... brick wall ...
... 6' x 16' ...
... 11-6 x 11-0 ... brick wall ...
... 6' x 16' ...

If altered Internally, give definite particulars, and state how the building will be occupied :

46. *... 10' brick wall in ...*
... 6' x 10' ...
... 6' x 10' ...
... 6' x 10' ...

47. How much will the alteration cost? *1000.00*

If the Building is to be occupied as a Flat, Apartment, Tenement or Lodging House, give the following particulars :

48. State what per centum of lot is to be occupied?
 49. How many feet open space will remain between building and rear line of lot?
 50. Is any part of building to be used as a store or for any other business purpose, if so, state for what?

	Cellar	Base-ment	1st Floor	2d Floor	3d Floor	4th Floor	5th Floor	6th Floor
51. How many families will occupy each?								
52. Height of ceilings?								
53. Number of living rooms opening on shafts and courts?								
54. Number of living rooms opening on street and yard?								

55. How basement to be occupied? Height of basement ceiling above sidewalk?
 How lighted and ventilated?
 How made water-tight?
 56. Will cellar or basement ceiling be plastered? How?

- 57. How will cellar stairs be enclosed?.....
- 58. How cellar to be occupied?..... Height of cellar ceiling above sidewalk?.....
How lighted and ventilated?.....
How made water-tight?.....
- 59. Give number of light and vent shafts.....
State materials to be used in their construction.....
- 60. Will shafts be open or covered with louvre skylights full size of shafts?.....
Size of each shaft?.....
- 61. Dimensions of windows for living rooms?.....
- 62. What doors will have fan lights?.....
Dimensions of same?.....
- 63. Of what materials will hall partitions be constructed?.....
- 64. Of what materials will hall floors be constructed?.....
- 65. How will hall ceilings and soffits of stairs be plastered?.....
- 66. How will halls be lighted and ventilated?.....
- 67. Of what material will stairways be constructed?.....
- 68. If any other building on lot, give size: front.....; rear.....; deep.....;
stories high.....; how occupied.....; on front or rear
of lot.....; material.....
How much space between it and proposed building?.....
- 69. How will floors and sides of water closets to the height of 16 inches be made waterproof?.....
- 70. Number and location of water closets: Cellar.....; 1st floor.....; 2d floor.....;
3d floor.....; 4th floor.....; 5th floor.....; 6th floor.....
- 71. Total area of shafts over 25 square feet?..... Of courts?.....

Owner, [Redacted] Address, 1st Street
72 1/2 St.
 Architect, **BRUNO W. BERGER, ARCHITECT.** " **121 BIBLE HOUSE, N. Y. CITY.**
 Superintendent, "
 Mason, [Redacted] " 554 E 12th Street
 Carpenter, [Redacted] "

6024B-03-25-13

B 439
L 5

Applicant must indicate the Building Line or Lines clearly and distinctly on the Drawings

BUREAU OF BUILDINGS
Office of the Borough President of the Borough of Manhattan,
In The City of New York

Received JUL 14 1905

FOR THE BOROUGH OF MANHATTAN

THE BUREAU OF BUILDINGS FOR THE BOROUGH OF MANHATTAN
Office, No. 220 FOURTH AVENUE,
S. W. Corner 18th Street.

Plan No. 1891

APPLICATION TO ALTER, REPAIR, ETC.

Application is hereby made to the Superintendent of Buildings of The City of New York for the Borough of Manhattan for the approval of the detailed statement of the specifications and plans herewith submitted for the alteration or repair of the building herein described. All provisions of the law shall be complied with in the alteration or repair of said building, whether specified herein or not.

(Sign here) O. Riesmann

THE CITY OF NEW YORK,

BOROUGH OF MANHATTAN, July 14 - 1905

LOCATION AND DESCRIPTION OF PRESENT BUILDING.

1. State how many buildings to be altered one
2. What is the exact location thereof? (State on what street or avenue; the side thereof, the number of feet from the nearest street or avenue, and the name thereof) East side of First Ave. 75 ft. South of E. 12th St. #190
3. How was the building occupied? tenement
How is the building to be occupied? _____
4. Is the building on front or rear of lot? front Is there any other building erected on lot or permit granted for one? no Size _____ x _____; height _____ How occupied? _____ Give distance between same and proposed building _____ feet.
5. Size of lot? 25 feet front; 25 feet rear; 80 feet deep.
6. Size of building which it is proposed to alter or repair? 25 feet front; 25 feet rear; 52 feet deep. Number of stories in height? 5 Height from curb level to highest point? 55 ft.
7. Depth of foundation walls below curb level? 8 ft Material of foundation walls? stone Thickness of foundation walls? front 24 inches; rear 24 inches; side 24 inches; party _____ inches.
8. Material of upper walls? brick If ashlar, give kind and thickness _____
9. Thickness of upper walls:
Basement: front _____ inches; rear _____ inches; side _____ inches; party _____ inches.
1st story: " 16 " " 16 " " 16 " " " " "
2d story: " 12 " " 12 " " 12 " " " " "
3d story: " 12 " " 12 " " 12 " " " " "
4th story: " 12 " " 12 " " 12 " " " " "
5th story: " 12 " " 12 " " 12 " " " " "
6th story: " _____ " " _____ " " _____ " " " " "
10. Is roof flat, peak or mansard? flat

If the Front, Rear or Side Walls, or any portion thereof, are to be taken out and rebuilt, give definite particulars, and state in what manner :

47. Enlarge window openings in rear wall using 2-4" 6 lbs. per ft. steel beams over enlarged opening. Bld. out house in yard size 4'8" x 3'8", 24'4" from main bldg. foundation 12" brick 4 ft. below ground level, upper walls 8" brick, size of floor beams 3" x 6" spruce, 16" on centre roof beams 3" x 6" spruce - 20" on centre skylight 2' x 2' -

If altered internally, give definite particulars, and state how the building will be occupied :

48. Bld. W.C. comp. on all floors, lath + plaster partitions.

Occupied as at present

49. How much will the alteration cost? \$ 1500 -

If the Building is to be occupied as a Flat, Apartment or Lodging House, give the following particulars :

50. Is any part of building to be used as a store or for any other business purpose, if so, state for what?

	Cellar	Basement	1st Floor	2d Floor	3d Floor	4th Floor	5th Floor	6th Floor
51. How many families will occupy each?								
52. Height of ceilings?								

53. How basement to be occupied?

How made water-tight?

54. Will cellar or basement ceiling be plastered? How?

55. How will cellar stairs be enclosed?

56. How cellar to be occupied?

How made water-tight?

57. Will shafts be open or covered with louvre skylights full size of shafts?

Size of each shaft?

58. Dimensions of water-closet windows?.....
 Dimensions of windows for living rooms?.....
59. Of what materials will hall partitions be constructed?.....

60. Of what materials will hall floors be constructed?.....

61. How will hall ceilings and soffits of stairs be plastered?.....
62. Of what material will stairways be constructed?.....
 Give sizes of stair well holes?.....
63. If any other building on lot, give size; front.....; rear.....; deep.....;
 stories high.....; how occupied.....; on front or rear
 of lot.....; material.....
 How much space between it and proposed building?.....
64. How will floors and sides of water closets to the height of 16 inches be made waterproof?.....

65. Number and location of water closets: Cellar.....; 1st floor.....; 2d floor.....;
 3d floor.....; 4th floor.....; 5th floor.....; 6th floor.....
66. This building will safely sustain per superficial foot upon the first floor..... lbs.; upon 2d floor
 lbs.; upon 3d floor..... lbs.; upon 4th floor..... lbs.; upon 5th floor
 lbs.; upon 6th floor..... lbs.; upon 7th floor..... lbs.; upon 8th floor
 lbs.

Owner, A. Goetz Address, 313 E. 6th St.
 Architect, R. Reissmann " 30 First St
 Superintendent, owner " _____
 Mason, _____ " _____
 Carpenter, _____ " _____

ORIGINAL 2758

2758

Form 21

8A-2144-39-B

DEPARTMENT OF HOUSING AND BUILDINGS

BOROUGH OF Manhattan, CITY OF NEW YORK

MANHATTAN Municipal Bldg., Manhattan

BROOKLYN Municipal Bldg., Brooklyn

BRONX Bronx County Bldg., Grand Concourse & E. 161st St.

QUEENS 21-10 49th Avenue, L. I. City

RICHMOND Borough Hall, St. George, S. I.

DEPARTMENT OF HOUSING & BUILDINGS

NOTICE—This Application must be TYPEWRITTEN and filed in TRIPPLICATE

RECEIVED JUL 19 1940

BUILDING NOTICE

CITY OF NEW YORK

BOROUGH OF MANHATTAN

Application for Minor Structures, Minor Alterations and Repairs

APPLICATION No. 2758 1940 19 Block 439
PERMIT No. 19 Lot 5
LOCATION 190 First Avenue, New York City
FEES REQUIRED FOR
DISTRICT (under building zone resolution) Use Business Height 1 1/2 Area B

EXAMINED AND RECOMMENDED

FOR APPROVAL ON OCT 7 1940

7/25/19 40

N. J. Sarnow Esq. Examiner

APPROVED 19

Chester W. Campbell Borough Superintendent

City of New York, July 18 1940

To THE BOROUGH SUPERINTENDENT:

Application is hereby made for approval of the plans and specifications herewith submitted, and made part hereof, for the erection or alteration of the building therein described,—with the understanding that if no work is performed hereunder within one year from the time of issuance, this approval shall expire by limitation as provided by law; and the applicant agrees to comply with all the rules and regulations of the Department of Housing and Buildings, all provisions of the Administrative Code of the City of New York, and with every other provision of law relating to the erection or alteration of said structure in effect at this date.

(Sign Here)

Handwritten signature of applicant

APPLICANT

(HERE STATE DEFINITELY NATURE OF PROPOSED WORK)

I propose to... erect toilet enclosures at rear of 1st floor north and south sides of building.

1. show comp. policy Sarnow

Handwritten notes: OK to plan, 7/24/40

Handwritten notes: V 8540, AIA 1047

Is this a new or old building? Old
If old building, give character of construction Ordinary
Number of stories high 5
How occupied Old Law Tenement - Class A-Multiple Dwelling
Is application made to remove a violation? Yes
How to be occupied no change
Cost \$50--

STATE AND CITY OF NEW YORK, }
COUNTY OF New York } ss.:

.....Sidney Daub.....being duly sworn
deposes and says: That he resides at.....63 Park Row.....
Borough of Manhattan.....City of New York; that he is the agent for the (owner-lessee)
of the premises above described, and is duly authorized to make this application; that the work to be done is duly
authorized by the owner.


Deponent further says that the full names and residences of the owners or lessces of said premises are:

Owner.....190-First Avenue Corp.....Residence ..190 First Avenue, New York City
Lessee.....Residence ..

Sworn to before me this.....
18 day of July....., 1940

JULÉ COHN, Notary Public
Bronx Co. C.R.'s No. 164 Reg. No. 167C42
N. Y. Co. C.R.'s No. 515 Reg. No. 2C561
Commission expires March 30, 1942

Notary Public or Commissioner of Deeds

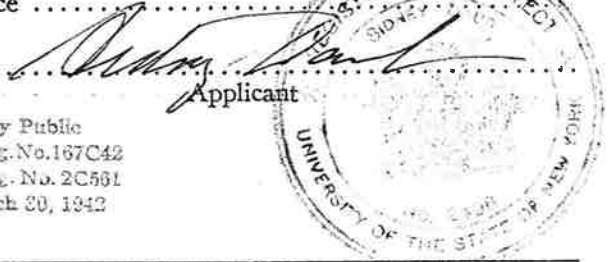

REMARKS:

7-7-40

Work commenced.....Date signed off.....19....

I hereby Certify that the above report is true in every respect and that the work indicated has been
done in the manner required by the Rules and Regulations of this Department, except where reported adversely.

Signed.....
Inspector

REMARKS OR SKETCH:

If this application is for Drop Curb Permit, DIAGRAM showing plot to be used, the relative position of the cut curb and the extent thereof, must be drawn above.

Cut curb.....Total Splay
Length in Feet Length in Feet

Deposit (\$.....), either in cash or certified check, payable to the order of the Department of Buildings, to insure the proper construction of the sidewalk and curb.

Refer to N.B. ALT.....19

Stanley Rapaport

(Typewrite Name of Applicant)

States that he ~~resides~~ **has office** at **32 Union Square** Borough of **Man.** City of New York; that he is the agent for the (owner-lessee) of the premises above

described, and is duly authorized to make this application for approval of the plans and specifications herewith submitted, and made a part hereof, for the work to be done in the building therein described,—with the understanding that if no work is performed hereunder within one year from the time of issuance, this approval shall expire by limitation as provided by law; and the applicant agrees to comply with all provisions of the Building Code and all laws and regulations applicable to the erection or alteration of said structure in effect at this date; that the work to be done is duly authorized by the owner.

Applicant further states that the full names and residences of the owners or lessees of said premises are:

Owner **Donzelli Realty Corp.** Address **87 Parkway Court, Bklyn.**
Louis Donzelli, Pres. "
~~lessee~~ **Nancy Donzelli, Vice Pres.** "

DATED.....



Stanley Rapaport
Applicant

If Licensed Architect or Professional Engineer, affix seal.

Falsification of any statement is an offense under Section 207.2-9.0 of the Administrative Code and is punishable by a fine of not more than five hundred dollars (\$500.00) or imprisonment of not more than sixty (60) days or both.

EXAMINED AND RECOMMENDED

For Approval on **10-5-60** 19

R. Bellegard
Examiner

Approved.....19

Borough Superintendent

Work commenced.....Date signed off.....19

I hereby Certify that the above report is true in every respect and that the work indicated has been done in the manner required by the Rules and Regulations of this Department, except where reported adversely.

Signed..... Inspector