

ORIGINAL  
Plan No. 1

APPLICATION FOR ERECTION OF BUILDINGS. 1

B401  
L47

Application is hereby made to the Superintendent of Buildings of the City of New York, for the approval of the detailed statement of the specifications and plans herewith submitted, for the erection of the building herein described. All provisions of the Building Law shall be complied with in the erection of said building, whether specified herein or not.

NEW YORK, April 17<sup>th</sup> 1899 (Sign here) Nathan Langer

Is the building to be fireproof. Iron pipe roof. Iron partitions. All partitions to be filled with brick filling. Iron partitions to be of a 2" iron pipe. Iron beams, and brick arches for 1st story (bonded) Specify construction of floor filling. Specify construction of partitions. Specify construction of floor filling.

- 1. State how many buildings to be erected. One
- 2. How occupied? If for dwelling, state the number of families. 24 families basement store
- 3. What is the street or avenue and the number thereof? Give diagram of property. 533 9th Street

- 4. Size of lot. No. of feet front, 24; No. of feet rear, 24; No. of feet deep, 97' 0 1/2"
- 5. Size of building. No. of feet front, 24; No. of feet rear, 24; No. of feet deep, 83' 6"; No. of stories in height, 6 + basement; No. of feet in height from curb level to highest point of roof beams, 69

- 6. What will each building cost exclusive of the lot? \$ 20,000<sup>00</sup>/<sub>100</sub>
- 7. What will be the depth of foundation walls from curb level or surface of ground? 10 ft
- 8. Will foundation be laid on earth, sand, rock, timber or piles? earth
- 9. What will be the base, stone or concrete? concrete If base stones, give size and thickness and how laid. If concrete, give thickness. 12"

- 10. What will be the sizes of piers? 20" x 24" 24" x 24" & 24" x 24"
- 11. What will be the sizes of the base of piers? 12" larger all around
- 12. What will be the thickness of foundation walls? 20" thick Of what material constructed? brick

- 13. What will be the thickness of upper walls? Basement, 20" inches; 1st story 16" inches; 2d story, 16" inches; 3d story, 12" inches; 4th story, 12" inches; 5th story, 12" inches; 6th story, 12" inches; 7th story, \_\_\_\_\_ inches, and from thence to top, \_\_\_\_\_ inches. Of what materials to be constructed?

- 14. State whether independent or party walls. party wall, and wall of 2 B. 19 + 20' 9" to be used as party wall
- 15. With what material will walls be coped? terra cotta
- 16. What will be the materials of front? brick If of stone, what kind? \_\_\_\_\_ Give thickness of ashler. \_\_\_\_\_ Give thickness of backing in each story. \_\_\_\_\_

- 17. Will the roof be flat, peaked or mansard? flat
- 18. What will be the materials of roofing? tin

- 19. Give size and materials of floor beams. 1st tier, 7" steel beams; 2d tier, 3" x 10" spuce; 3d tier, 3" x 10" spuce; 4th tier, 3" x 10" spuce; 5th tier, 3" x 10" spuce; 6th tier, 3" x 10" spuce; 7th tier, \_\_\_\_\_; 8th tier, \_\_\_\_\_; roof tier, 3" x 9" spuce  
State distances from centres. 1st tier, 3' 6" inches; 2d tier, 16" inches; 3d tier, 16" inches; 4th tier, 16" inches; 5th tier, 16" inches; 6th tier, 16" inches; 7th tier, \_\_\_\_\_ inches; 8th tier, \_\_\_\_\_ inches; roof tier, 20" inches.

- 20. If floors are to be supported by columns and girders, give the following information: Size and material of girders under 1st floor, \_\_\_\_\_ under each of the upper floors, \_\_\_\_\_ Size and materials of columns under 1st floor, \_\_\_\_\_ under each of the upper floors, \_\_\_\_\_

- 21. This building will safely sustain per superficial foot upon 1st floor 70 lbs.; upon 2d floor 70 lbs.; upon 3d floor 70 lbs.; upon 4th floor 70 lbs.; upon 5th floor 70 lbs.

- 22. If the front, rear or side walls are to be supported, in whole or in part, by iron girders or lintels, give definite particulars. front to be carried on girders as follows 2-10" beams, 76 lbs. per yd.

- 23. If girders are to be supported by brick piers and columns, state the sizes of piers and columns. The above girders to be supported by piers as follows pier facing old party wall to be 20" x 24"; intermediate piers to be 24" x 24" and pier facing new party wall 24" x 24" all as shown
- 24. State by whom the construction of the building is to be superintended. Owner

**If the Building is to be occupied as an Apartment or Tenement House, give the following particulars.**

1. State how many families are to occupy each floor, and the whole number in the house; also, if any part is to be used as a store or for any other business purposes, state the fact, *4 families on each story basement used for stores & wood house*

2. What will be the heights of ceilings? 1st story, *10* feet; 2d story, *10* feet; 3d story, *9'4"* feet; 4th story, *9'4"* feet; 5th story, *9'4"* feet; 6th story, *9'4"* feet; 7th story, \_\_\_\_\_ feet.

3. How are the hall partitions to be constructed and of what materials? *main halls of angle iron & 4" brick. private halls of square studding*

4. How many buildings are to be taken down? \_\_\_\_\_

Owner *Simon Jacob* Address *512 Clinton Street*  
 Architect *Nathan Langer* Address *190 Bowery*  
 Mason \_\_\_\_\_ Address \_\_\_\_\_  
 Carpenter \_\_\_\_\_ Address \_\_\_\_\_

**If a Wall or part of a Wall already built is to be used, fill up the following.**

The undersigned gives notice that *he* intends to use the *westerly* wall of building *533 Fifth Street being the easterly wall of building 531 Fifth St.* as party wall in the erection of the building hereinbefore described, and respectfully requests that the same be examined and a permit granted therefor. The foundation wall *is* built of *20* inches thick, *10* feet below curb; the upper wall *being* built of *brick*, *12* inches thick, *5'4"* feet deep, *60* feet in height.

(Sign here)

*Nathan Langer*

NOTE--In making application for the erection of buildings, the following drawings must be furnished: Plans of each and every story, front, rear and side elevations, and longitudinal and transverse sections. All plans must be drawn to a uniform scale, and must be on tracing cloth, properly designated and colored.

**THE BUILDING LAW REQUIRES:**

- 1st--That all stone walls shall be properly bonded and laid in cement mortar.
- 2d--That all skylights having a superficial area of more than nine square feet, placed in any building, shall have the sashes and frames thereof constructed of iron and glass.
- 3d--That every building which is more than two stories in height above the curb level, except dwelling-houses, hotels, school-houses and churches, shall have doors, blinds or shutters made of iron, hung to iron hanging frames or to iron eyes built into the wall, on every window and opening above the first story thereof, excepting on the front openings of buildings fronting on streets which are more than thirty feet in width. Or the said doors, blinds or shutters may be constructed of pine or other soft wood of two thicknesses of matched boards at right angles with each other, and securely covered with tin, on both sides and edges, with folded lapped joints, the nails for fastening the same being driven inside the lap; the hinges and bolt, or latches shall be secured or fastened to the door or shutter after the same has been covered with the tin, and such doors or shutters shall be hung upon an iron frame, independent of the woodwork of the windows and doors, or two iron hinges securely fastened in the masonry; or such frames, if of wood, shall be covered with tin in the same manner as the doors and shutters.
- 4th--That outside fire escapes shall be placed on every dwelling-house occupied by or built to be occupied by three or more families above the first story, and every building already erected, or that may hereafter be erected, more than three stories in height, occupied and used as a hotel or lodging house, and every boarding-house, having more than fifteen sleeping-rooms above the basement story, and every factory, mill, manufactory or workshop, hospital, asylum or institution for the care or treatment of individuals, and every building in whole or in part occupied or used as a school or place of instruction for assembly, and every office building five stories or more in height, all to be constructed as follows:

**BALCONIES MUST NOT BE LESS THAN THREE FEET WIDE.**

BRACKETS must not be less than  $\frac{1}{2} \times 1\frac{1}{4}$  inches wrought iron, placed edgewise, or  $1\frac{1}{4}$  inch angle iron  $\frac{1}{4}$  inch thick, and not more than three feet apart, and the braces to brackets must be not less than  $\frac{3}{4}$  inch square wrought iron, and must extend two-thirds of the width of the respective brackets or balconies. In all cases the brackets must go through the wall, and be turned down three inches.

BRACKETS ON NEW BUILDINGS must be set as the walls are being built. When brackets are to be put on old houses, the part going through the wall shall not be less than one inch diameter, with screw nuts and washers not less than five inches square and  $\frac{1}{2}$  inch thick.

TOP RAILS.--The top rail of balcony must be  $1\frac{1}{2}$  inch  $\times$   $\frac{1}{2}$  inch wrought iron or  $1\frac{1}{2}$  inch angle iron  $\frac{1}{4}$  inch thick, and in all cases must go through the walls, and be secured by nuts and 4 inch square washers, at least  $\frac{3}{8}$  inch thick, and no top rail shall be connected at angles by the use of cast iron.

BOTTOM RAILS.--Bottom rails must be  $1\frac{1}{2}$  inch  $\times$   $\frac{3}{4}$  inch wrought iron or  $1\frac{1}{2}$  inch angle iron  $\frac{1}{4}$  inch thick, well leaded into the wall. In frame buildings the top rails must go through the studding and be secured on the inside by washers and nuts as above.

FILLING-IN BARS.--The filling-in bars must be not less than  $\frac{1}{2}$  inch round or square wrought iron, placed not more than 6 inches from centres, and well riveted to the top and bottom rails.

STAIRS.--The stairs in all cases must be not less than 18 inches wide, and constructed of  $\frac{1}{4} \times 3\frac{1}{4}$  inch wrought iron sides or strings. Steps may be of cast iron of the same width of strings, or  $\frac{3}{4}$  inch round iron, double rungs, and well riveted to the strings. The stairs must be secured to a bracket on top and rest on and be secured to a bracket or extra cross bar at the bottom. All stairs must have a  $\frac{3}{4}$  inch hand rail of wrought iron, well braced.

FLOORS.--The flooring of balconies must be of wrought iron  $1\frac{1}{2} \times \frac{3}{4}$  inch slats placed not over 14 inches apart, and secured to iron battens  $1\frac{1}{2} \times \frac{3}{4}$  inch, not over three feet apart and riveted at the intersection. The openings for stairways in all balconies shall not be less than 20 inches wide and 36 inches long, and have no covers.

DROP LADDERS.--Drop ladders from lower balconies where required shall not be less than 14 inches wide, and shall be made of  $1\frac{1}{2} \times \frac{3}{4}$  inch sides and  $\frac{3}{4}$  inch rungs of wrought iron. In no case shall a drop ladder be more than 12 feet in length. In no case shall the ends of balconies extend more than nine inches over the brackets.

SCUTTLE LADDERS.--Ladders to scuttles shall be constructed in all cases the same as the stairs or step-ladders from balconies of fire escapes.

THE HEIGHT OF RAILING around balconies shall not be less than two feet nine inches.

**No Fire Escape will be approved by the Superintendent of Buildings if not in accordance with above specifications.**

In constructing all balcony fire-escapes, the manufacturer thereof shall securely fasten thereto, in a conspicuous place, a cast-iron plate having suitable raised letters on the same, to read as follows: Notice! Any person placing any incumbrance on this balcony is liable to a penalty of ten dollars and imprisonment for ten days.

5th--That all exterior and division or party walls over fifteen feet high, excepting where such walls are to be finished with cornices, gutters or crown mouldings, shall have parapet walls carried two feet above the roof, and shall be coped with stone, well-burnt terra-cotta or cast iron.

6th--That every building and the tops and sides of every dormer-window thereon shall be covered and roofed with slate, tin, copper or iron, or such other quality of fire-proof roofing as the superintendent of buildings, under his certificate, may authorize.

7th--That all exterior cornices shall be fire proof.

8th--That the stone or brick work of all smoke flues, and the chimney shafts of all furnaces, boilers, bakers' ovens, large cooking ranges and laundry stoves, and all flues used for a similar purpose, shall be at least eight inches in thickness. If there is a cast-iron or burnt clay pipe built inside of the same, with one-inch air space all around it, then the stone or brick work inclosing such pipes shall not be less than four inches in thickness.

9th--That before any iron or steel beam, lintel or girder intended to span an opening over ten feet in length in any building, shall be used for supporting a wall, it shall be inspected, tested and approved as provided by law.

ORIGINAL

FORM 54-1898

Department of Buildings of the City of New York.

BOROUGH OF MANHATTAN AND THE BRONX.

Plan No. 411 MB 189 Filed 189

NOTICE.—In making application for the approval of plans for light and ventilation of new tenement and lodging houses, or for alterations of existing tenement or lodging houses, the following drawings must be furnished: Plans of all floors, including cellar and basement, and, if necessary, transverse and longitudinal sections. All plans must be drawn to a uniform scale, not less than one-quarter inch to the foot, and be on tracing cloth or cloth prints, and each shaft or court properly designated and dimensions of same plainly marked thereat.

NOTICE.—This permit expires by its own limitation six months from date of approval of the plan by the Commissioner of Buildings, unless the building is then begun.

THOMAS J. BRADY, Commissioner of Buildings.

APPLICATION

TO THE

COMMISSIONER OF BUILDINGS

TO APPROVE PLANS FOR LIGHT AND VENTILATION OF PROPOSED TENEMENT OR LODGING HOUSE.

Pursuant to law, application is hereby made to the Commissioner of Buildings to approve plans herewith submitted for light and ventilation of the buildings described in the following specifications, which are made part of said plans. The plans and specifications are to be construed together, but in case of any difference between them these specifications, subject to such conditions as may be imposed by the Commissioner of Buildings, are to govern.

Location 533 Fifth Street Number of Buildings 500
Owner Simon Jacobs Address 212 Clinton Street
Architect Nathan Gager Address 276 Madison Street
Dimensions of each Lot 24' x 97' 0 1/2"
Dimensions of each Building 41' x 83' 6"
Dimensions of each Extension
Number of floors above cellar or basement of main building 6 of extension

If it is proposed to alter an existing tenement or lodging house, or to convert a dwelling house or other building into a tenement or lodging house, state in what particulars:

Cellar—How to be occupied? .....

Basement—How to be occupied? *Stores & wood houses*

Cellar ceiling—Height above sidewalk .....

Basement ceiling—Height above sidewalk *5 ft.*

	Cellar.	Basement.	1st floor.	2d floor.	3d floor.	4th floor.	5th floor.	6th floor.	7th floor.
How many families will occupy each floor .....			4	4	4	4	4	4	
Height of ceilings .....		8'	10'	10'	9'4"	9'4"	9'4"	9'4"	
Number of living rooms opening on shafts and courts .....			9	9	9	9	9	9	
Number of living rooms opening on street and yard .....			4	4	4	4	4	4	

Halls—How lighted and ventilated? *By windows + skylight*

State dimensions of ventilating skylight over main hall *4'0" x 6'0"*

Dimensions of windows for living rooms *12 sq. ft + over*

Dimensions of windows for water-closet apartments *3 sq. ft.*

Dimensions of fanlights over doors of living rooms where marked on plans *14" by width of door*

Cellar—How lighted and ventilated? .....

Basement—How lighted and ventilated? *By windows*

" How made water-tight? *concreted*

Cellar—How lighted and ventilated? .....

" How made water-tight? .....

Will cellar or basement ceiling be plastered? *yes*

What additional structure, if any, will be on lot? .....

Distance from extreme rear of main building to rear line of lot *15' 8 1/2"*

Distance from extreme rear of extension to rear line of lot .....

	Cellar.	Basement.	1st floor.	2d floor.	3d floor.	4th floor.	5th floor.	6th floor.	7th floor.
Number and location of water-closets ..		2	2	2	2	2	2	2	

How will the floor and sides of water-closet apartments be made water-tight? *with slate for base + sides to be height of seat except where door is.*

How will water-closet apartments be ventilated? *By windows leading to light shaft*

# DEPARTMENT OF BUILDINGS OF THE CITY OF NEW YORK.

Boroughs of Manhattan and the Bronx.

Plan No. 411

NEW BUILDINGS OF 189 .

STATE OF NEW YORK }  
City and County of New York } ss.:

Nathan Langer, the Architect of premises hereinafter described, being duly sworn, deposes and says: That Simon Jacobs who resides at No. 212 Clinton Street in the City of New York in the County of New York in the State of New York, is the owner in fee of all that certain lot, piece or parcel of land, shown on the diagram annexed hereto and made a part hereof, situate, lying and being in the City and County of New York, known and designated as No. 533 Fifth Street, and bounded and described as follows, viz.:

BEGINNING at a point on the Northerly side of Fifth Street distant 424' 6" feet easterly from the corner formed by the intersection of Av. A. & Fifth Street (N.E. cor.) running thence easterly 24 ft. thence Northerly 97' 0 1/2" thence Westerly 24' thence Southerly 97' 0 1/2" to the point or place of beginning.

Deponent further says that the building proposed to be erected upon the said premises in accordance with the accompanying detailed statement in writing of the specifications and plans therefor, will be erected by or on account of the following persons, whose full names, residences and interests are as follows:

- Simon Jacobs No. 212 Clinton Street  
as Owner
- Nathan Langer No. 190 Boverly  
as Architect
- \_\_\_\_\_ No. \_\_\_\_\_  
as \_\_\_\_\_
- \_\_\_\_\_ No. \_\_\_\_\_  
as \_\_\_\_\_
- \_\_\_\_\_ No. \_\_\_\_\_  
as \_\_\_\_\_

**DEPARTMENT OF BUILDINGS**  
**BOROUGH OF MANHATTAN , CITY OF NEW YORK**

**MANHATTAN**  
Municipal Bldg.,  
Manhattan

**BROOKLYN**  
Municipal Bldg.,  
Brooklyn

**BRONX**  
Bronx County Bldg.,  
Grand Concourse & E. 161st St.  
Bronx

**QUEENS**  
21-10 49th Avenue,  
L. I. City

**RICHMOND**  
Boro Hall  
St. George, S. I.

NOTICE—This Application must be TYPEWRITTEN and filed in triplicate.

DEPARTMENT OF  
HOUSING & BUILDINGS  
Received AUG 17 1938  
CITY OF NEW YORK  
BOROUGH OF MANHATTAN

BLOCK AND LOT  
CHECKED CORRECT

*M.H.*

**AFFIDAVIT**

PERMIT No. 1836 <sup>1938</sup>  
P. & D. APPLICATION No. 193  
LOCATION N. side E. 5th. St., 216'-10" W. of BLOCK 401 LOT 47  
Ave. B.- No. 533 E. 5th. St. WARD \_\_\_\_\_ VOL \_\_\_\_\_  
New York City, Aug. 15th. 1938

To THE COMMISSIONER OF BUILDINGS:

Application is hereby made for approval of the plans and specifications herewith submitted, and made a part hereof, for the PLUMBING AND DRAINAGE of the building herein described,—with the understanding that if no work is performed hereunder within one year from the time of issuance this approval shall expire by limitation as provided by law; and the applicant agrees to comply with all the rules and regulations of the Department of Buildings for the Borough of Man. and with every other provision of law relating to this subject in effect at this date.

Work under this approval will not be commenced until a permit has been secured, application for which will be filed with the Commissioner of Buildings, accompanied by satisfactory evidence that compensation insurance has been obtained in accordance with the provisions of the Workmen's Compensation Law.

EXAMINED AND RECOMMENDED FOR APPROVAL ON August 22 1938

*Boydman*  
Examiner

APPROVED \_\_\_\_\_ 193

Commissioner of Buildings, Borough of *OB*

STATE AND  
CITY OF NEW YORK, } ss.:  
COUNTY OF N.Y.

Frederick S. Keeler, R.A.  
Typewrite Name of Applicant.

being duly sworn, deposes and says: That he resides at Number 170 Fifth Ave.  
in the City of New York, in the Borough of Manhattan  
in the State of New York, in the County of New York  
that he is architedt for the  
owner in fee of all that certain lot, piece or parcel of land, shown on the diagram annexed hereto and made a part hereof, situate, lying and being in the Borough of Man., City of New York, aforesaid, and known and designated as Number 533 E. 5th. St.  
and hereinafter more particularly described; that the work proposed to be done upon the said premises, in accordance with the accompanying detailed statement in writing of the specifications and plans of such proposed work—including all amendments to the same which may be filed hereafter—is duly authorized to be

Deponent further says that the full names and residences, street and number of the owner or owners of the said land, and also of every person interested in said building or proposed building, structure or proposed structure, premises, wall, platform, staging or flooring, either as owner, lessee, or in any representative capacity, are as follows:

Rose Scime No. 438 E. 9th. St., Man. as Owner.

Sam Scime, No. 438 E. 9th. St. as Contractor & Superintendent.

No. as

The said land and premises above referred to are situate at, bounded and described as follows, viz.: BEGINNING at a point on the North side of E. 5th. St. distant 216'-10" feet West from the corner formed by the intersection of East 5th. St. and Ave. B. running thence West 24'-7" feet; thence North 97'-0" feet; thence East 24'-7" feet; thence South 97'-0" feet to the point or place of beginning.

SIGN HERE Frederick S. Keeler APPLICANT No. 170 Fifth Ave., Man.

Sworn to before me, this day of 193

NOTE: Connection of well or river water supply pipes to the City water supply pipes is prohibited.

NOTE: If building is a multiple dwelling the following authorization is required.

AUTHORIZATION OF OWNER

Rose Scime DEPOSES AND SAYS: That she resides at No. 438 E. 9th. St. Borough of Manhattan City of New York State of New York; that she is the owner of all that certain piece or lot of land situated in the Borough of Man. in the City of New York, and located on the N. side of E. 5th. St.

and known as No. 533 on said street; that the multiple dwelling proposed to be alt. upon said premises will be constructed in accordance with the annexed specifications and plans submitted herewith for the approval of the Department of Buildings, and that Frederick S. Keeler, R.A. is duly authorized by said owner to make application in said owner's behalf in compliance with Chapter 213 of the Laws of 1929 for the approval of such specifications and plans.

NOTE:—This clause to be used only when the person executing this authorization is not the sole owner of the premises described herein.

He further says that the full names and residences, street and number, of the owner or owners of the said land, and of every person having an interest in said premises and projected multiple dwelling either as owner, lessee, or otherwise, as required by Section 300 of the Multiple Dwelling Law, are as follows:

(Name) No. (Address)

as (Relation to premises)


(Name) No. (Address)

(Relation to premises)

(Name) No. (Address)

as (Relation to premises)

(signed on Alt. 1536-38) Rose Scime, Signature.

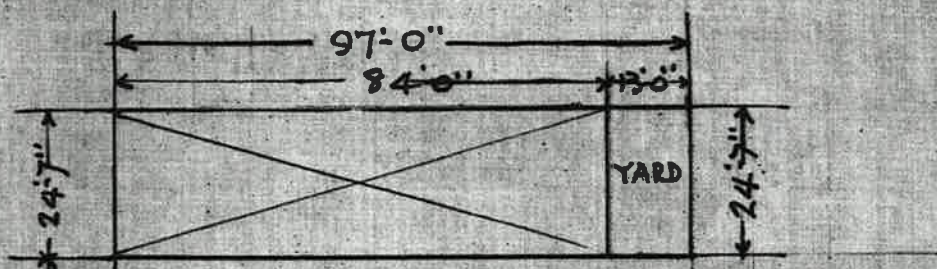


216'-10"

E. 5TH ST.

AVE B.

NO 533 E. 5TH ST.  
 BLOCK NO 401  
 LOT NO 47.  
 ZONES


BUSINESS  
 1 1/2  
 B.



1530 1938

PLOT PLAN  
 SCALE 1/32" = 1 FT.



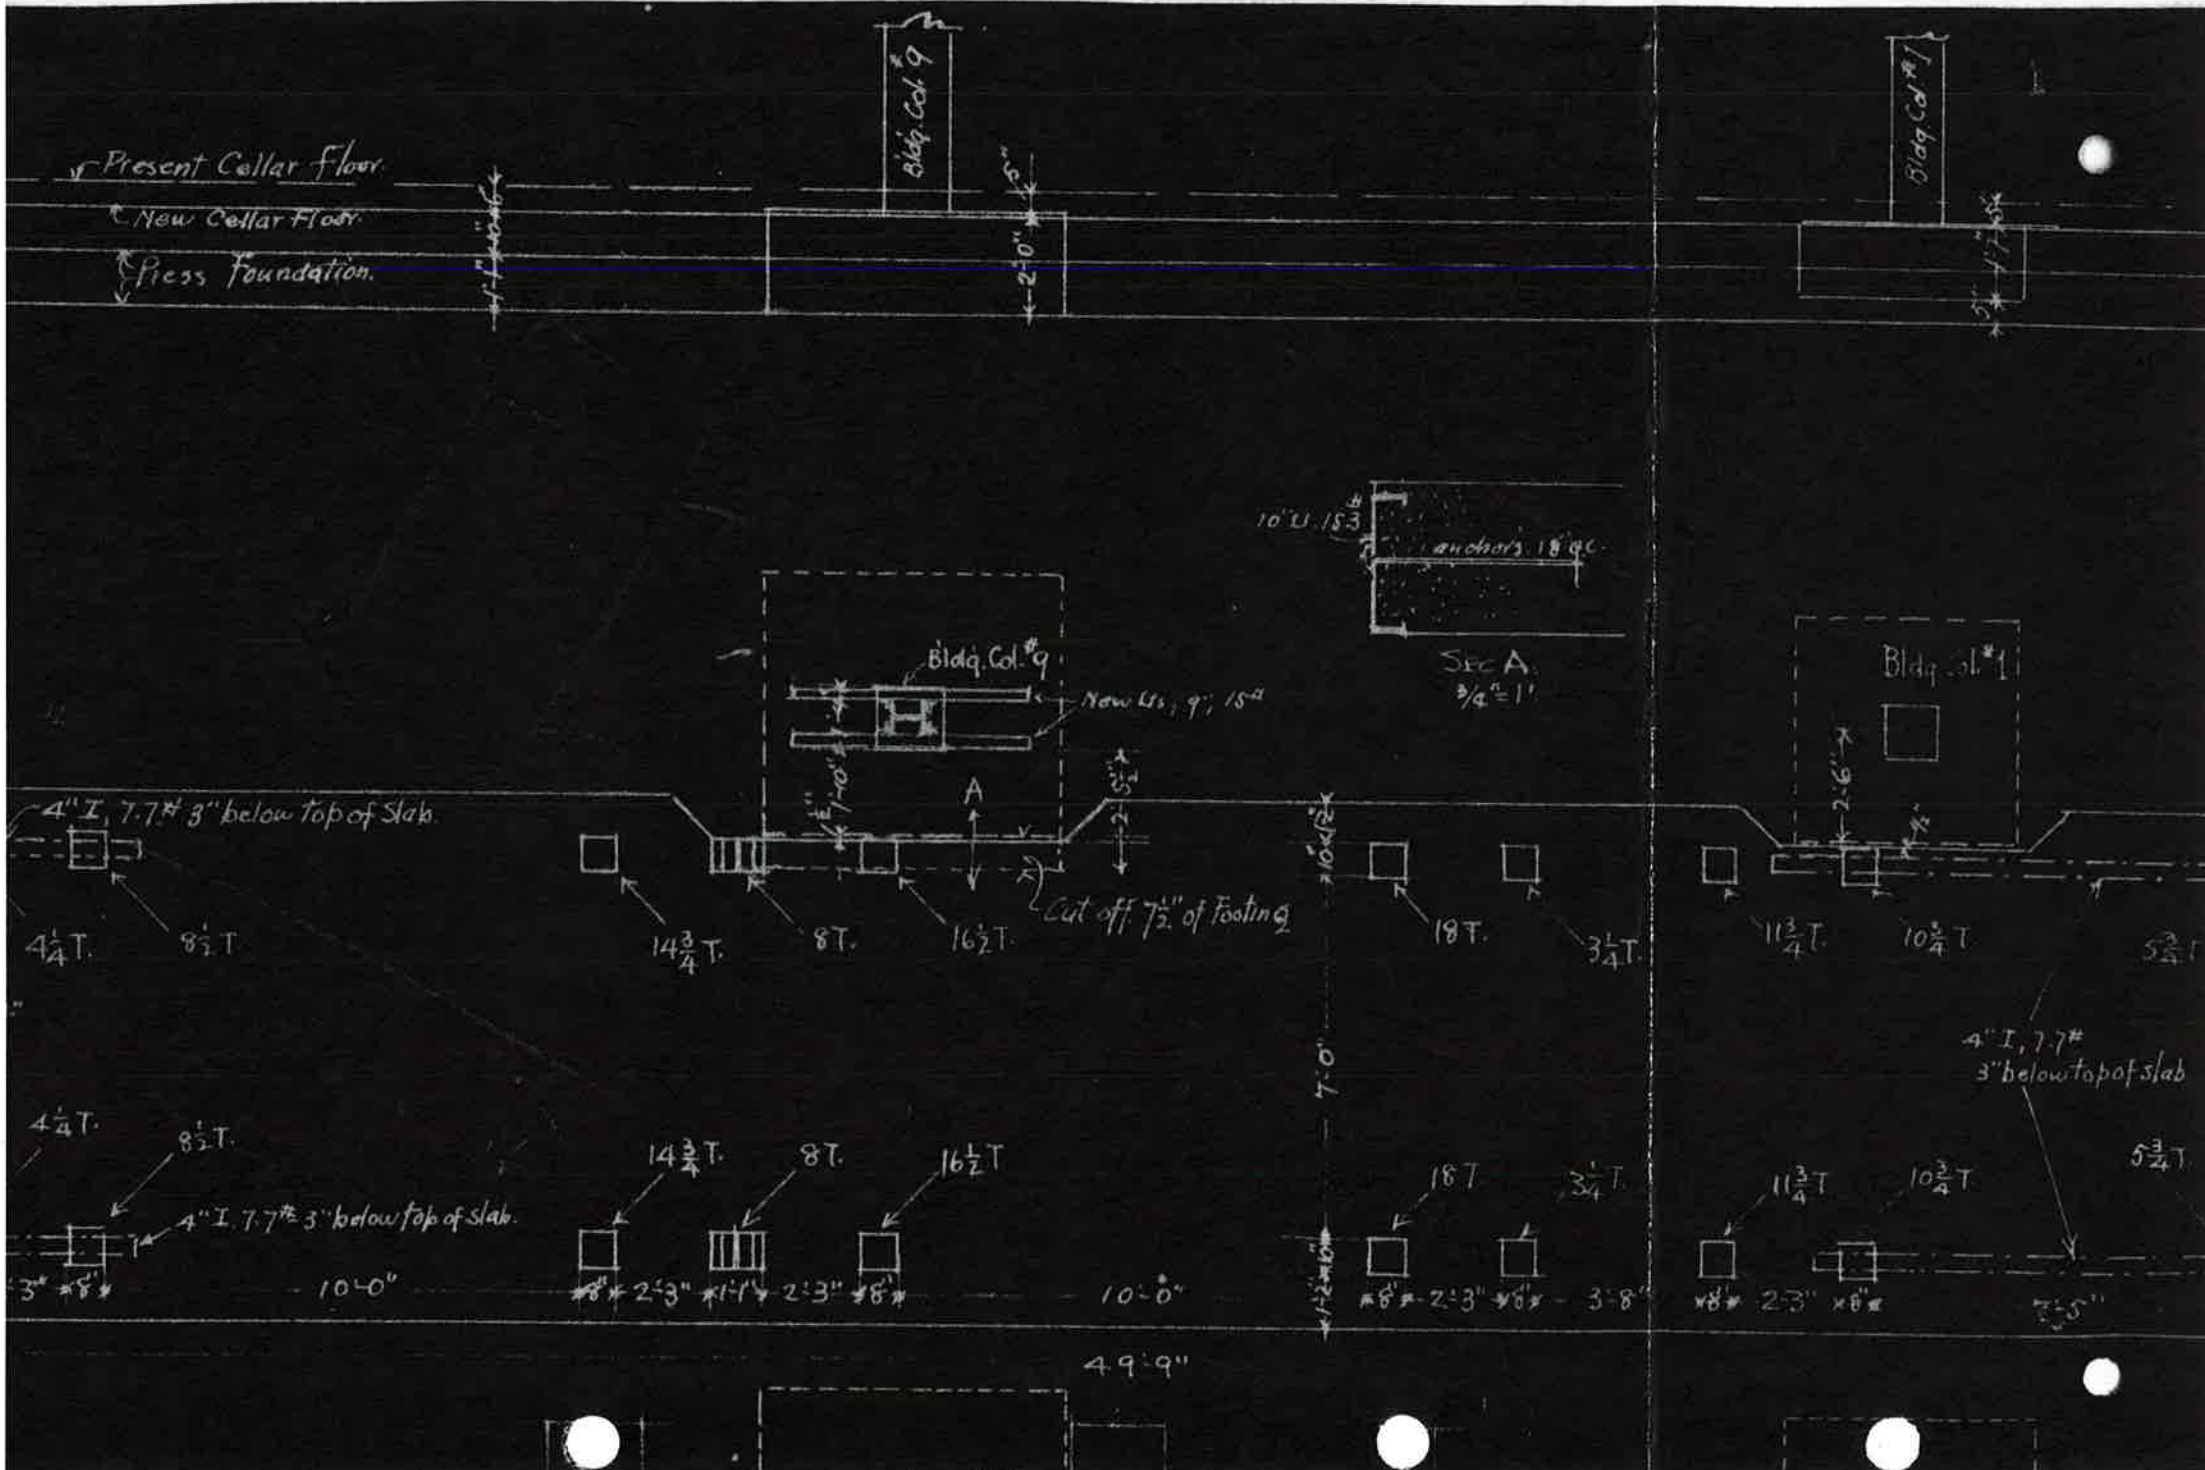

BOROUGH OF MANHATTAN, CITY OF NEW YORK

DEPARTMENT OF HOUSING AND BUILDINGS

MANHATTAN  
Municipal Bldg.,  
Manhattan

BROOKLYN  
Municipal Bldg.,  
Brooklyn

BRONX  
Bronx County Bldg.,  
Grand Concourse & E. 161st St.  
Bronx

DEPARTMENT OF HOUSING & BUILDINGS  
21-10 49th Avenue,  
City Hall  
St. George, S. I.

Received MAY 18 1938

NOTICE—This Application must be TYPEWRITTEN and filed in TRIPPLICATE.

Use for Specifications of "ALTERED" BUILDINGS

ALTERED BUILDINGS

PERMIT No. .... 19  
 APPLICATION No. .... 1530 1938  
 BLOCK No. .... 401  
 LOT No. .... 47  
 WARD No. ....  
 VOL. No. ....

LOCATION N. side of E. 5th. St., 216'-10" W. of Ave. B.  
 No. 533 E. 5th. St.  
 DISTRICT (under building zone resolution) USE Bus. HEIGHT 1 1/2 AREA B.  
 NOT CONSIDERED

SPECIFICATIONS

- (1) NUMBER OF BUILDINGS TO BE ALTERED one  
 Any other building on lot or permit granted for one? no  
 Is building on front or rear of lot? front
- (2) ESTIMATED COST OF ALTERATION: \$ 2,000.00
- (3) OCCUPANCY (in detail): Class A. Multiple Dwelling (old law tenement)

STORY (Include cellar and basement)	BEFORE ALTERATION			AFTER ALTERATION				
	APTS.	ROOMS	USE	LIVE LOAD	NO. OF PERSONS	APTS.	ROOMS	USE
No Cellar								
Bas't.	2	3	APTS & Stores	no change	0	0	0	STORE heat & Stg.
1st.	4	13	Ap'ts.	"	12	4	13	Ap'ts.
2nd.	4	13	"	"	12	4	13	"
3rd.	4	13	"	"	12	4	13	"
4th.	4	13	"	"	12	4	13	"
5th.	4	13	"	"	12	4	13	"
6th.	4	13	"	"	12	4	13	"

ORIGINAL

If building is to be occupied other than dwelling with ordinary store on the first floor, give permit number under which it was erected or legally converted.

(7) STATE GENERALLY IN WHAT MANNER THE BUILDING WILL BE ALTERED:

Fire retard public halls. Stairs are now fireproof and extend to roof with bulkhead.

First Floor is steel beams and brick arches.

Install ~~baths~~ and water closets in apartments.

Build flue ~~in old F.P. duct water shaft~~ for future steam heat. ~~HC~~  
*OK July 7. 38.*

If the building is to be raised in height or if the occupancy is changed so that the floor loads will be increased, the following information must be given as to the EXISTING BUILDING and the thickness of existing walls and size of footings must be clearly shown on the plans.

(8) FOUNDATIONS: Character of Soil (State one of the materials as described in Building Code, Section C26-377.0)

Material of Foundation Walls

Thickness of Walls

Depth Below Curb

(9) UPPER WALLS: Material

Kind of Mortar

Any Ashlar

Thickness of Walls

(10) PARTY WALLS: Any to be used?

Thickness of Walls

If building is to be enlarged or extended, the following information as to NEW WORK must be given:

(11) FOUNDATIONS: Character of Soil (State one of the materials as described in Building Code, Section C26-377.0)

Material of Foundation Walls

Thickness of Walls

Depth Below Curb

(12) UPPER WALLS: Material

Kind of Mortar

Any Ashlar

Thickness of Walls

(13) PARTY WALLS: Any to be used?

Thickness of Walls

(14) FIREPROOFING: Material and Thickness

For Columns

For Girders

For Beams

(15) INTERIOR FINISH: Material

Floor Surface

Walls

STATE INSURANCE FUND

Pol. #145091

(STANDARD FORM APPROVED BY THE INDUSTRIAL COMMISSIONER)

APPLICATION FOR CERTIFICATE OF WORKMEN'S COMPENSATION INSURANCE

The undersigned Employer desires to obtain a Certificate of Workmen's Compensation Insurance from the STATE INSURANCE FUND as satisfactory proof required under the provisions of Section 57 of the Workmen's Compensation Law, to be filed with Dept. of Housing & Bldgs., New York City

(Name of Department, Bureau, Corporation, Firm or Individual)

Address Rose Seime, 17 St. Marks Pl., NYC

A. Beginning on or about 8-4-38, the following operations, at the locations named herein, will be performed by the employees of the assured:

Locations of Operations 533 E. 5th St., NYC

Table with 2 columns: Description of Operations by Class, Estimated Payroll by Class. Row 1: Masonry work (to remove present stoop), Chimney on the present dumbwaiter & remove metal corgage on the roof & make parapet brick wall.

B. The following operations will be performed by employees of subcontractors:

Table with 2 columns: Description of Operations, Name of Subcontractor. Row 1: None.

Date 8-3-38

(Name of employer)

(Signature and title of person signing this form)

NOTE: This application must be signed by the Employer if an individual, or if a copartnership by a member of the copartnership, or by an executive officer if a corporation.

CERTIFICATE OF WORKMEN'S COMPENSATION INSURANCE

San Seime

This is to certify that

(Name of employer)

Address 438 E. 9th St., NYC

is insured with the STATE INSURANCE FUND under Policy No. Y-145091 covering the entire obligation of this Employer for Workmen's Compensation under the New York Workmen's Compensation Law with respect to the operations described in the foregoing application at the locations named therein.

This policy term covers the period from 4-22-38 to 4-22-39. If said policy is changed or cancelled during its term in such manner as to affect this Certificate, five (5) days' written notice of such change or cancellation will be given to the

Dept. of Housing & Bldgs., New York City - Rose Seime, 17 St. Marks Pl.

(Bureau, Department, Corporation, Firm or Individual)

Address NYC, in accordance with those requirements, this Certificate has been issued. Notice by registered mail so addressed shall be sufficient compliance with this provision. The STATE INSURANCE FUND does not assume any liability in the event of failure to give such notice.

A. Beginning on or about 8-4-38, the following operations, at the locations named herein, will be performed by the employees of the assured:

Locations of Operations as above

Table with 2 columns: Description of Operations by Class, Estimated Payroll by Class. Row 1: as above.