

Plan No. _____

Received APR 6 1896

FORM No. 1.

APPLICATION FOR ERECTION OF BUILDINGS.

B
L
35

Application is hereby made to the Superintendent of Buildings of the City of New York, for the approval of the detailed statement of the specifications and plans herewith submitted, for the erection of the building herein described. All provisions of the Building Law shall be complied with in the erection of said building, whether specified herein or not.

NEW YORK, April 6 1896.

(Sign here)

J. Beckell & Son Arch.

1. State how many buildings to be erected. One on Rear part of Lot
2. How occupied? If for dwelling, state the number of families. Kitchen
3. What is the street or avenue and the number thereof? Give diagram of property. No 182 Ave B.
4. Size of lot. No. of feet front, 30'; No. of feet rear, 30'; No. of feet deep, 90'
5. Size of building. No. of feet front, 10'; No. of feet rear, 10'; No. of feet deep, 20'; No. of stories in height, 1; No. of feet in height from curb level to highest point of roof beams, 12'
6. What will each building cost exclusive of the lot? \$ 450⁵⁰
7. What will be the depth of foundation walls from curb level or surface of ground? 4'
8. Will foundation be laid on earth, sand, rock, timber or piles? earth
9. What will be the base, stone or concrete? stone If base stones, give size and thickness and how laid. 2' x 3' 8" thick laid cross ways If concrete, give thickness.
10. What will be the sizes of piers?
11. What will be the sizes of the base of piers?
12. What will be the thickness of foundation walls? 20" Of what material constructed? stone
13. What will be the thickness of upper walls? Basement, _____ inches; 1st story 12 inches; 2d story, _____ inches; 3d story, _____ inches; 4th story, _____ inches; 5th story, _____ inches; 6th story, _____ inches; 7th story, _____ inches, and from thence to top, _____ inches. Of what materials to be constructed? brick
14. State whether independent or party walls. independent
15. With what material will walls be coped? 3" x 10" stone
16. What will be the materials of front? brick If of stone, what kind? _____ Give thickness of ashler. _____ Give thickness of backing in each story. _____
17. Will the roof be flat, peaked or mansard? flat
18. What will be the materials of roofing? flat
19. Give size and materials of floor beams. 1st tier, Solid ground; 2d tier, _____; 3d tier, _____; 4th tier, _____; 5th tier, _____; 6th tier, _____; 7th tier, _____; 8th tier, _____; roof tier, 3" x 6" spruce
State distances from centres. 1st tier, _____ inches; 2d tier, _____ inches; 3d tier, _____ inches; 4th tier, _____ inches; 5th tier, _____ inches; 6th tier, _____ inches; 7th tier, _____ inches; 8th tier, _____ inches; roof tier, 24 inches.
20. If floors are to be supported by columns and girders, give the following information: Size and material of girders under 1st floor, _____ under each of the upper floors, _____ Size and materials of columns under 1st floor, _____ under each of the upper floors, _____
21. This building will safely sustain per superficial foot upon 1st floor _____ lbs.; upon 2d floor _____ lbs.; upon 3d floor _____ lbs.; upon 4th floor _____ lbs.; upon 5th floor _____ lbs.
22. If the front, rear or side walls are to be supported, in whole or in part, by iron girders or lintels, give definite particulars. _____
23. If girders are to be supported by brick piers and columns, state the sizes of piers and columns. _____
24. State by whom the construction of the building is to be superintended. Charles Jones

If the Building is to be occupied as an Apartment or Tenement House, give the following particulars.

1. State how many families are to occupy each floor, and the whole number in the house; also, if any part is to be used as a store or for any other business purposes, state the fact, *To be occupied as a kitchen*

2. What will be the heights of ceilings? 1st story, *10* feet; 2d story, _____ feet; 3d story, _____ feet; 4th story, _____ feet; 5th story, _____ feet; 6th story, _____ feet; 7th story, _____ feet.

3. How are the hall partitions to be constructed and of what materials? _____

4. How many buildings are to be taken down? _____

Owner *Charles Young* Address *N-163 E 81st St*
 Architect *J. Powell & Son* Address *" 5th Blvd*
 Mason _____ Address _____
 Carpenter _____ Address _____

If a Wall or part of a Wall already built is to be used, fill up the following.

The undersigned gives notice that _____ intend to use the _____ wall of building

as party wall in the erection of the building hereinbefore described, and respectfully requests that the same be examined and a permit granted therefor. The foundation wall _____ built of _____ inches thick, _____ feet below curb; the upper wall _____ built of _____ inches thick, _____ feet deep, _____ feet in height.

(Sign here) _____

NOTE--In making application for the erection of buildings, the following drawings must be furnished: Plans of each and every story, front, rear and side elevations, and longitudinal and transverse sections. All plans must be drawn to a uniform scale, and must be on tracing cloth, properly designated and colored.

THE BUILDING LAW REQUIRES:

- 1st—That all stone walls shall be properly bonded and laid in cement mortar.
- 2d—That all skylights having a superficial area of more than nine square feet, placed in any building, shall have the sashes and frames thereof constructed of iron and glass.
- 3d—That every building which is more than two stories in height above the curb level, except dwelling-houses, hotels, school-houses and churches, shall have doors, blinds or shutters made of iron, hung to iron hanging frames or to iron eyes built into the wall, on every window and opening above the first story thereof, excepting on the front openings of buildings fronting on streets which are more than thirty feet in width. Or the said doors, blinds or shutters may be constructed of pine or other soft wood of two thicknesses of matched boards at right angles with each other, and securely covered with tin, on both sides and edges, with folded lapped joints, the nails for fastening the same being driven inside the lap; the hinges and bolt, or latches shall be secured or fastened to the door or shutter after the same has been covered with the tin, and such doors or shutters shall be hung upon an iron frame, independent of the woodwork of the windows and doors, or two iron hinges securely fastened in the masonry; or such frames, if of wood, shall be covered with tin in the same manner as the doors and shutters.
- 4th—That outside fire escapes shall be placed on every dwelling-house occupied by or built to be occupied by three or more families above the first story, and every building already erected, or that may hereafter be erected, more than three stories in height, occupied and used as a hotel or lodging-house, and every boarding-house, having more than fifteen sleeping-rooms above the basement story, and every factory, mill, manufactory or workshop, hospital, asylum or institution for the care or treatment of individuals, and every building in whole or in part occupied or used as a school or place of instruction or assembly, and every office building five stories or more in height, all to be constructed as follows:

BALCONIES MUST NOT BE LESS THAN THREE FEET WIDE.

BRACKETS must not be less than $\frac{1}{2} \times 1\frac{1}{4}$ inches wrought iron, placed edgewise, or $1\frac{1}{4}$ inch angle iron $\frac{1}{4}$ inch thick, well braced, and not more than three feet apart, and the braces to brackets must be not less than $\frac{3}{4}$ inch square wrought iron, and must extend two-thirds of the width of the respective brackets or balconies. In all cases the brackets must go through the wall, and be turned down three inches.

BRACKETS ON NEW BUILDINGS must be set as the walls are being built. When brackets are to be put on old houses, the part going through the wall shall not be less than one inch diameter, with screw nuts and washers not less than five inches square and $\frac{1}{4}$ inch thick.

TOP RAILS.—The top rail of balcony must be $1\frac{1}{2}$ inch \times $\frac{1}{2}$ inch wrought iron or $1\frac{1}{2}$ inch angle iron $\frac{1}{4}$ inch thick, and in all cases must go through the walls, and be secured by nuts and 4 inch square washers, at least $\frac{5}{8}$ inch thick, and no top rail shall be connected at angles by the use of cast iron.

BOTTOM RAILS.—Bottom rails must be $1\frac{1}{2}$ inch \times $\frac{3}{4}$ inch wrought iron or $1\frac{1}{2}$ inch angle iron $\frac{1}{4}$ inch thick, well leaded into the wall. In frame buildings the top rails must go through the studding and be secured on the inside by washers and nuts as above.

FILLING-IN BARS.—The filling-in bars must be not less than $\frac{1}{2}$ inch round or square wrought iron, placed not more than 6 inches from centres, and well riveted to the top and bottom rails.

STAIRS.—The stairs in all cases must be not less than 18 inches wide, and constructed of $\frac{1}{2} \times 3\frac{1}{2}$ inch wrought iron sides or strings. Steps may be of cast iron of the same width of strings, or $\frac{5}{8}$ inch round iron, double rungs, and well riveted to the strings. The stairs must be secured to a bracket on top and rest on and be secured to a bracket or extra cross bar at the bottom. All stairs must have a $\frac{3}{4}$ inch hand rail of wrought iron, well braced.

FLOORS.—The flooring of balconies must be of wrought iron $1\frac{1}{2} \times \frac{3}{4}$ inch slats placed not over $1\frac{1}{4}$ inches apart, and secured to iron battens $1\frac{1}{2} \times \frac{3}{4}$ inch, not over three feet apart and riveted at the intersection. The openings for stairways in all balconies shall not be less than 20 inches wide and 36 inches long, and have no covers.

DROP LADDERS.—Drop ladders from lower balconies where required shall not be less than 14 inches wide, and shall be made of $1\frac{1}{2} \times \frac{5}{8}$ inch sides and $\frac{5}{8}$ inch rungs of wrought iron. In no case shall a drop ladder be more than 12 feet in length. In no case shall the ends of balconies extend more than nine inches over the brackets.



SCUTTLE LADDERS.—Ladders to scuttles shall be constructed in all cases the same as the stairs or step-ladders from balconies of fire escapes.

THE HEIGHT OF RAILING around balconies shall not be less than two feet nine inches.

No Fire Escape will be approved by the Superintendent of Buildings if not in accordance with above specifications.

In constructing all balcony fire-escapes, the manufacturer thereof shall securely fasten thereto, in a conspicuous place, a cast-iron plate having suitable raised letters on the same, to read as follows: Notice! Any person placing any incumbrance on this balcony is liable to a penalty of ten dollars and imprisonment for ten days.

- 5th—That all exterior and division or party walls over fifteen feet high, excepting where such walls are to be finished with cornices, gutters or crown mouldings, shall have parapet walls carried two feet above the roof, and shall be coped with stone, well-burnt terra-cotta or cast iron.
- 6th—That every building and the tops and sides of every dormer-window thereon shall be covered and roofed with slate, tin, copper or iron, or such other quality of fire-proof roofing as the superintendent of buildings, under his certificate, may authorize.
- 7th—That all exterior cornices shall be fire proof.
- 8th—That the stone or brick work of all smoke flues, and the chimney shafts of all furnaces, boilers, bakers' ovens, large cooking ranges and laundry stoves, and all flues used for a similar purpose, shall be at least eight inches in thickness. If there is a cast-iron or burnt clay pipe built inside of the same, with one-inch air space all around it, then the stone or brick work inclosing such pipes shall not be less than four inches in thickness.
- 9th—That before any iron or steel beam, lintel or girder intended to span an opening over ten feet in length in any building, shall be used for supporting a wall, it shall be inspected, tested and approved as provided by law.

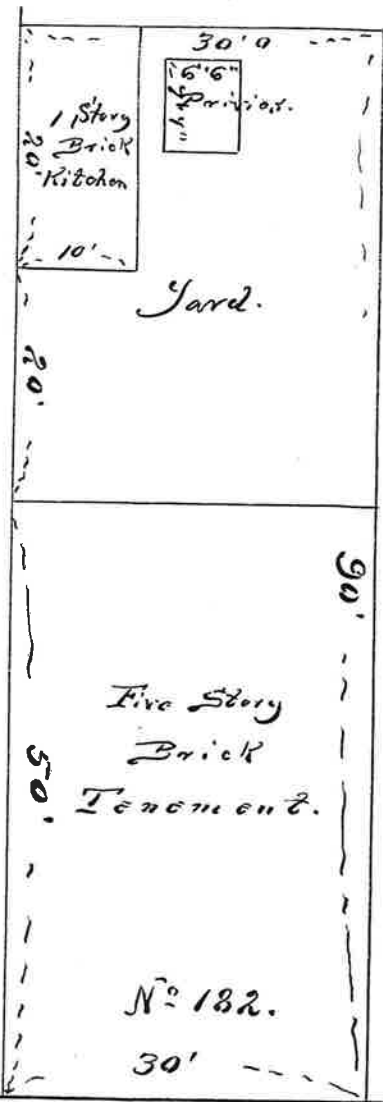

Ave B.

City and County of New York } ss. Plan No. 182-1013 Buildings. 1013
 I, Justus H. Garthe Residing at 182 - Ave B.
 in the City of New York State of New York
 do hereby depose and say that I am the Lessee
 of the premises known and designated as 182 - Ave B.

in the City of New York; and that the work proposed to be done, in accordance with the accompanying plans and specifications upon the said premises is authorized by me, and that Frederick Schmitt is authorized by me to make application for a permit for the proposed work in my behalf.

And I further depose and say, that no other person or persons than myself, or those herein-after named, with their several addresses, are in any manner interested in the said work, as owners, executors, administrators or other legal representatives.

Charles Young is the owner of the premises, residing at 163 East 81st St. and has given me permission to erect a building in the rear of the lot.

Subscribed and sworn to before me, this 22 day of October, A. D., 1888 } Justus H. Garthe

H. C. Green
 Notary Public
214 100

5th.—All walls must be coped with stone or iron. If coped with stone the stone must not be less than 2½ inches thick, and if with iron, the iron must not be less than ½ inch thick, and turned down at least 1½ inches at edges.

6th.—Roofs must be covered with fire-proof material.

7th.—All cornices must be fire proof.

8th.—All furnace and boiler flues must be constructed as follows :

All FURNACE FLUES OF DWELLING HOUSES shall have at least eight-inch walls on each side. The inner four inches from the bottom of flue to a point two feet above the second story floor, shall be built of fire-brick laid with fire-clay mortar. No furnace flue shall be of less size than eight inches square, or four inches wide and sixteen inches long, inside measure. When furnace flues are located in the usual chimney stacks, the side of the flue inside of the house to which it belongs may be four inches thick. If preferred, the furnace flues may be made of cast-iron, or fire-clay pipe of proper size, built in the walls with an air space of not less than one inch between said pipes, and four inches of brick wall on the outside.

All BOILER FLUES must be lined with fire-brick at least twenty-five feet in height from the bottom, and in no case shall the walls of said flues be less than eight inches thick.

All flues not built for furnace or boiler flues must be altered to conform to the above requirements before they are used as such.

9th.—No iron beam, lintel, or girder, intended to span an opening over eight feet, or iron post, or column, intended to support a wall of stone or brick, or any floor or part thereof, shall be used for that purpose, *until tested and approved* as provided by law.

REPORT UPON APPLICATION.

Fire Department, City of New York,

BUREAU OF INSPECTION OF BUILDINGS,

NEW YORK, _____ 188

To the Inspector of Buildings :

I respectfully report that I have thoroughly examined and measured the wall named in the foregoing application, and find the foundation wall to be built of _____ inches thick, the upper wall built of _____ inches thick, _____ feet deep _____ feet in height, and that the mortar in said walls is _____ hard and good, and that all the walls are _____ in a good and safe condition.

(The Examiner must here state what defects, if any, are in the walls, beams or other part of the building.)

Examiner of Buildings.

FINAL REPORT OF EXAMINER.

NEW YORK, Dec 1st 1884

To the Inspector of Buildings :

Work was commenced on the within described building on the 31 day of Oct 1884 and completed on the 21 day of Nov 1884 and has been done in accordance with the foregoing detailed statement, except as noted below.

Respectfully submitted,

Saml Walker
Examiner.

REMARKS.

DEPARTMENT OF BUILDINGS OF THE CITY OF NEW YORK.

STATE OF NEW YORK,
CITY AND COUNTY OF NEW YORK, } ss:

Plan No. W.D. 1896 Buildings.

Charles Young

being duly sworn, deposes and says: I reside at No. 163 East 81st Str.

Street, in the City of New York, aforesaid; I am the Owner.

~~owner~~ of the premises known and designated as N 18th Ave 12

in the said City of New York; that the work proposed to be done upon the said premises, in accordance with the accompanying detailed statement in writing of the specifications and plans of such proposed work, is authorized by me

and that J. Corbett Sr.

is authorized by me to make application to the Superintendent of Buildings, for the approval of such detailed statement of specifications and plans in my

behalf.

Deponent further says, that the full names and residences of the owner or owners of the land, and also of every person interested in said building or proposed building, platform, staging or flooring, either as owner, lessee, or in any representative capacity, are as follows:

Sworn to before me, this 2nd day of April 1896

Charles Young

Henry Cooper
Notary Public, New York County.

REPORT UPON APPLICATION.

Department of Buildings of the City of New York.

NEW YORK, _____ 189

To the Superintendent of Buildings:

I respectfully report that I have thoroughly examined and measured the wall _____, etc., named in the foregoing application, and found the foundation wall _____ to be built of _____ inches thick, _____ feet below curb, the upper wall _____ built of _____ inches thick, _____ feet deep, _____ feet in height, and that the mortar in said wall _____ is _____ hard and good, and that the wall _____ built as party wall _____ and _____ in a good and safe condition.

What is the nature of the ground? _____

What kind of sand was used in the mortar? _____

(The Inspector must here state what defects, if any, are in the wall.)

(The Inspector must state the thickness of wall in each and every story.)

Inspector.

FINAL REPORT OF INSPECTOR.

NEW YORK, May 31 1896

To the Superintendent of Buildings:

Work was commenced on the within described building on the 21 day of April 1896 and completed on the 15 day of May 1896, and all the iron and steel girders, beams and columns are properly set, and of size as per application, and all the work upon said building has been done in accordance with the foregoing detailed statement, except as noted below.

Respectfully submitted,

John H Buscall Inspector.
REMARKS.

Applicant must indicate the Building Line or Lines clearly and distinctly on the Drawings.

B400
L 303

Office of the Borough President of the Borough of Manhattan,
In The City of New York.

3

THE BUREAU OF BUILDINGS FOR THE BOROUGH OF MANHATTAN,
Office, No. 220 FOURTH AVENUE,
S. W. Corner 18th Street.

Handwritten scribble

Plan No. _____

APPLICATION TO ALTER, REPAIR, ETC.

Application is hereby made to the Superintendent of Buildings of The City of New York, for the Borough of Manhattan, for the approval of the detailed statement of the specifications and plans herewith submitted, for the alteration or repairs of the building herein described. All provisions of the Law shall be complied with in the alteration or repair of said building, whether specified herein or not.

(Sign here) *H. M. Behrens*

The City of New York, Borough of Manhattan, *Oct 21* 190*8*

LOCATION AND DESCRIPTION OF PRESENT BUILDING.

- State how many buildings to be altered *one*
- What is the exact location thereof? (State on what street or avenue, the side thereof, the number of feet from the nearest street or avenue, and the name thereof) *87 Ave B. 63'-3" from n/w cor of 11th St*
- How was the building occupied? *Tenement*
How is the building to be occupied? *Tenement*
- Is the building on front or rear of lot? *front* Is there any other building erected on lot or permit granted for one? *No* Size _____ x _____; height _____ How occupied? _____ Give distance between same and proposed building _____ feet.
- Size of lot? *30'* feet front; *34'* feet rear; *90'-6"* feet deep.
- Size of building which it is proposed to alter or repair? *30'* feet front; *30'* feet rear; *50'-1 1/2'* feet deep. Number of stories in height? *5* Height from curb level to highest point? *50'*
- Depth of foundation walls below curb level? *11'-0"* Material of foundation walls? *Stone* Thickness of foundation walls? front *20* inches; rear *20* inches; side *20* inches; party *20* inches.
- Material of upper walls? *Brick* If ashlar, give kind and thickness _____
- Thickness of upper walls:
Basement: front *20* inches; rear *20* inches; side *20* inches; party *20* inches.
1st story: " *16* " " *16* " " *16* " " *16* "
2d story: " *12* " " *12* " " *12* " " *12* "
3d story: " *11* " " *11* " " *11* " " *11* "
4th story: " *11* " " *11* " " *11* " " *11* "
5th story: " *4* " " *4* " " *4* " " *4* "
6th story: " _____ " " _____ " " _____ " " _____ "
- Is roof flat, peak or mansard? _____

11. Size of present extension, if any? _____ feet front; _____ feet deep; _____ feet high.

12. Thickness and material of foundation walls? 20" Stone

13. Material of upper walls? Brick If ashlar, give kind and thickness _____

14. Thickness of upper walls :
Basement: front 20 inches; rear 20 inches; side 20 inches; party 20 inches.
1st story: " 16 " " 16 " " 16 " " 16 "
2d story: " 12 " " 12 " " 12 " " 12 "
3d story: " 12 " " 12 " " 12 " " 12 "
4th story: " 12 " " 12 " " 12 " " 12 "

15. Is present building provided with a fire escape? Yes

If to be extended on any side, give the following information :

16. Is extension to be on side, front or rear? Rear

17. Size of proposed extension, feet front 8'-0"; feet rear 8'-0"; feet deep 12'-6"; number of stories in height? 1 number of feet in height? 10'-0"

18. Material of foundation walls? Brick + Stone; depth 11'-0" feet; material of base course Stone + Concrete; thickness of base course 2'-0"; thickness of foundation walls, front 20" inches; side 20" inches; rear 20" inches; party 20" inches.

19. Will foundation be on rock, sand, earth or piles? sand

20. What will be the size of piers in cellar? _____; distance on centres? _____; size of base of piers? _____; thickness of cap stones? _____; of bond stones? _____

21. Material of upper walls? Brick; material of front? for extension

22. Thickness, exclusive of ashlar, of upper walls :
1st story: front 8 inches; rear 8 inches; side 8 inches; party — inches.
2d story: " _____ " " _____ " " _____ " " _____ "
3d story: " _____ " " _____ " " _____ " " _____ "
4th story: " _____ " " _____ " " _____ " " _____ "
5th story: " _____ " " _____ " " _____ " " _____ "
6th story: " _____ " " _____ " " _____ " " _____ "

23. With what will walls be coped? Blue stone

24. Will roof be flat, peak, or mansard? flat; material metal

25. Give size and material of floor and roof beams
1st tier, material Yellow Pine, size 3x8; distance on centres 16"
2d tier, " _____ " _____ " 3x8 " " 20"
3d tier, " _____ " _____ " _____ " _____ "
4th tier, " _____ " _____ " _____ " _____ "
5th tier, " _____ " _____ " _____ " _____ "
Roof tier, " _____ " _____ " _____ " _____ "

Give thickness of headers _____ of trimmers _____

26. Give material of girders _____ of columns _____

Under 1st tier, size of girders _____; size of columns _____
" 2d " " " _____; " " _____
" 3d " " " _____; " " _____
" 4th " " " _____; " " _____
" 5th " " " _____; " " _____
" Roof tier, " " _____; " " _____

Resident of

DEPARTMENT OF BUILDINGS OF THE CITY OF NEW YORK
FOR THE BOROUGH OF MANHATTAN.

PLAN No. 221 of 1908

State and City of New York,
County of New York,

ss.: Herman Behrens
Martha Behrens his wife

being duly sworn, deposes and says: That he resides at Number 182 Ave B
in the Borough of Manhattan
in The City of New York, in the County of New York
in the State of New York; that they are

owner in fee of all that certain lot, piece or parcel of land, shown on the diagram annexed hereto and made
a part hereof, situate, lying and being in the Borough of Manhattan
in The City of New York, aforesaid, and known and designated as Number 182 Ave B

and hereinafter more particularly described;
that the work proposed to be done upon the said premises, in accordance with the accompanying detailed
statement, in writing, of the specifications and plans of such proposed work, is duly authorized to be
performed by E. J. Collins
and that E. J. Collins
duly authorized by Herman & Martha Behrens
to make application for the approval of such detailed statement of specifications and plans in their
behalf.

Deponent further says that the full names and residences, street and number, of the owner or owners
of the said land, and also of every person interested in said building or proposed building, structure, or
proposed structure, premises, wall, platform, staging or flooring, either as owner, lessee, or in any repre-
sentative capacity, are as follows:

- Herman Behrens No. 182 Ave B
as part owner
- Martha Behrens No. 182 Ave B
as part owner
- E. J. Collins No. 175 E. 116 St.
as Architect
- No. _____
as _____
- No. _____
as _____

The said land and premises above referred to are situate at, bounded and described as follows, viz.:

BEGINNING at a point on the West side of Ave B.

....., distant 63'-3" feet

..... from the corner formed by the intersection of

Ave B.

and

E 11th St

running thence 30'-0" North feet;

thence 90'-6" West feet;

thence 30'-0" South feet;

thence 90'-6" East feet

to the point or place of beginning.

Hermana Behrens

Sworn to before me, this 21st }
day of October 1908 }

Martha Behrens

August Schuyler

Notary Public Wayne County.

REPORT OF INSPECTOR AS TO COMMENCEMENT OF WORK.

The City of New York, Borough of Manhattan, Dec 15 1908

To the Superintendent of Buildings for the Borough of Manhattan:

Work was commenced on the within described building on the 15 day of Dec 1908

Respectfully submitted,

William J M Curtis Inspector.

FINAL REPORT OF INSPECTOR.

The City of New York, Borough of Manhattan, Dec 17 1908

To the Superintendent of Buildings for the Borough of Manhattan:

Work was completed on the within described building on the 17 day of Dec 1908, and all the iron and steel girders, beams and columns are properly set, and of the size as per application, and all the work upon said building has been done in accordance with the foregoing detailed statement, except as noted below.

Respectfully submitted,

William J M Curtis Inspector.

REMARKS.

Multiple horizontal lines for writing remarks.

BUREAU OF BUILDINGS
BOROUGH OF MANHATTAN
220 FOURTH AVENUE.

MS

Oct. 29, 1908.
ON

Application #2066 Alt. 1908.

I have thoroughly examined the within specifications,
and also the drawings relating thereto, and find the same to
conform to the law as to construction.

A. D'Neily
J. D. Poth

BUREAU OF BUILDINGS

BOROUGH OF MANHATTAN, CITY OF NEW YORK

3002

NOTICE—This Application must be TYPEWRITTEN and filed in TRIPLICATE, and ONE copy sworn to by Applicant. If Elevator or Plumbing Applications are filed herewith, ONE AFFIDAVIT is sufficient for all. Plans must be filed on tracing Linen or Cloth.

BUREAU OF BUILDINGS
OF THE CITY OF NEW YORK

Received OCT 15 1920

FOR THE BOROUGH
OF MANHATTAN

ALT. APPLICATION No. 3002 ¹⁹²⁰ ~~192~~

LOCATION 182 Avenue B BLOCK 405 LOT 35

When properly signed by the Superintendent of Buildings of the Borough of Manhattan, this application becomes a PERMIT as required by the Building Code of The City of New York, to perform such work as is described in the foregoing statement and the attached plans and specifications which are a part hereof.

EXAMINED AND RECOMMENDED FOR APPROVAL ON Dec. 22 1920
P. Hestley
Examiner

APPROVED 1920 192
Russell
Superintendent of Buildings, Borough of Manhattan

New York City, 10/13/20 192

TO THE SUPERINTENDENT OF BUILDINGS:

Application is hereby made for approval of the plans and specifications herewith submitted, and made a part hereof, for the ALTERATION of the building therein described,—with the understanding that if no work is performed within one year from the time of issuance, this approval shall expire by limitation as provided by law; and the applicant agrees to comply with all the rules and regulations of the Bureau of Buildings for the Borough of Manhattan, all provisions of the Building Code of The City of New York, and with every other provision of law relating to this subject in effect at this date.

STATE, COUNTY AND CITY OF NEW YORK } ss.: Frederick J. Berger, doing business under style of Bruno W. Berger & Son, Architects,
Typewrite Name of Applicant

being duly sworn, deposes and says: That he resides at Number 121 Bible House
in the Borough of Manhattan
in the City of New York, in the County of New York
in the State of New York, that he is Martha Behrens is the

owner in fee of all that certain lot, piece or parcel of land, shown on the diagram annexed hereto and made a part hereof, situate, lying and being in the Borough of Manhattan, City of New York aforesaid, and known and designated as Number 182 Avenue B.

and hereinafter more particularly described; that the work proposed to be done upon the said premises, in accordance with the accompanying detailed statement in writing of the specifications and plans of such proposed work, including all amendments to the same which may be filed hereafter—and also all Elevator and Plumbing work

(if any) proposed to be done upon the same premises and specified in separate applications filed herewith, and all subsequent amendments thereto—is duly authorized by MARTHA BEHRENS, owner.

and that Bruno W. Berger & Son, Architects

duly authorized by the aforesaid owner to make application for the approval of such detailed statement of specifications and plans (and amendments thereto) in her behalf.

Deponent further says that the full names and residences, street and number, of the owner or owners of the said land, and also of every person interested in said building or proposed building, structure or proposed structure, premises, wall, platform, staging or flooring, either as owner, lessee, or in any representative capacity, are as follows:

NAMES AND ADDRESSES

Owner Martha Behrens, 182 Avenue B.

Lessee _____

Architect Bruno W. Berger & Son, 121 Bible House, City.

Superintendent _____

The said land and premises above referred to are situate at, bounded and described as follows, viz.: BEGINNING at a point on the west side of Avenue B distant 63' 3" feet north from the corner formed by the intersection of

11th Street and Avenue B. running thence north 30 feet; thence west 90' 6" feet; thence south 30 feet; thence east 90' 6" feet; thence

to the point or place of beginning, being designated on the map as Block No. 405 Lot No. 35

(SIGN HERE) [Signature] Applicant

Sworn to before me, this 15th day of October 1920

Dimensions and Lot and Block numbers agree with Land Map.

(Signature) _____ Date _____ Tax Dept. (Title) _____

ALTERATION PERMIT

**BUREAU OF BUILDINGS
BOROUGH OF MANHATTAN
CITY OF NEW YORK**

NOTE: All elevations and grades for curbs and sidewalks must be obtained from the Commissioner of Public Works, Municipal Building, New York City



