

D451 L14

206 E 10 St

10th ST E. 206

~~UB 1843-10~~

V 2199-67Boiler NB 850-91\*

~~SE 1843-10~~ AL 505-36

~~SE 1027-167~~ PRS 1306-58

Alt 1823-54P. Alt 1248-40

~~UB 505-36\*~~

AND STREET

HOUSE NO. AND STREET

HOUSE NO. AND STREET

# APPLICATIONS

	KIND	NO.	YEAR	FILED	COMPLETED	DRAWINGS
1	N/B	850	1891	O-Fay Stacom A-Charles Rent #	✓	INSIDE
2	all	1723	1934		7/6/58	Inside
3	BN	108	1963		11/10/63	
4						
5						
6						
7						
8						
9						
10						
11						

10th STREET EAST

206

B. 451

NB 850-91\*

FE 505-36

ALT 1248-40

ALT 1823-54P

PRS 1306-58

V 2199-67BOILER\*

General Index—Housing and Development Administration—Department of Buildings

H-Form 114 (Rev. 6/70)

## BUREAU OF BUILDINGS

BOROUGH OF MANHATTAN, CITY OF NEW YORK

Plan No. 850

*Copy*  
APPLICATION FOR ERECTION OF BUILDINGS.

Application is hereby made to erect a building — as per subjoined detailed statement of specification for Erection of Buildings, and I herewith submit Plans and Drawings of such proposed building — and I do hereby agree that the provisions of the Building Law will be complied with whether the same are specified herein or not.

NEW YORK, June 10<sup>th</sup> 1891 (Sign here) Charles Renty.

1. State how many buildings to be erected. One
2. How occupied? If for dwelling, state the number of families. Dwellings. 24 families in rows.
3. What is the street or avenue and the number thereof? Give diagram of property. No. 206  
E. 10<sup>th</sup> St.
4. Size of lot. No. of feet front, 25.0; No. of feet rear, 25.0; No of feet deep, 93.3/4
5. Size of building. No. of feet front, 25.0; No. of feet rear, 25.0; No. of feet deep, 80.6  
No. of stories in height, 6; No. of feet in height from curb level to highest point of roof beams, 69.14
6. What will each building cost exclusive of the lot? \$ 24,000<sup>00</sup>/<sub>100</sub>
7. What will be the depth of foundation walls from curb level or surface of ground? 10 ft.
8. Will foundation be laid on earth, sand, rock, timber or piles? Natural Soil
9. What will be the base, stone or concrete? stone If base stones, give size and thickness and how laid. 30 x 36 x 8" laid crosswise If concrete, give thickness.
10. What will be the sizes of piers? 12 x 16"
11. What will be the sizes of the base of piers? 2.0 x 2.0 x 8"
12. What will be the thickness of foundation walls? 16 - 20 x 24 Of what material constructed? Hard burnt brick & good blue Bedg. stone laid in cement mortar.
13. What will be the thickness of upper walls? Basement, \_\_\_\_\_ inches; 1st story, 12-16 + 20 inches; 2d story, 12 1/6 inches; 3d story, 12 1/6 inches; 4th story, 12 1/6 inches; 5th story, 12 1/6 inches; 6th story, 12 1/6 inches; 7th story, \_\_\_\_\_ inches, and from thence to top, 12 inches. Of what materials to be constructed? Hard burnt brick in lime mortar
14. State whether independent or party walls. eastern wall party, other independent.
15. With what material will walls be coped? Reddish stone
16. What will be the materials of front? stone in basement If of stone, what kind? Brown stone  
Give thickness of ashlar. 4" Give thickness of backing in each story. 20" esp. 16"
17. Will the roof be flat, peaked or mansard? Flat
18. What will be the materials of roofing? Tin
19. Give size and materials of floor beams. 1st tier, 3x10 spruce; 2d tier, 3x10  
spruce; 3d tier, 3x10 spruce; 4th tier, 3x10 spruce; 5th tier, 3x10 spruce; 6th tier, 3x10 spruce; 7th tier, \_\_\_\_\_  
\_\_\_\_\_ ; 8th tier, \_\_\_\_\_ ; roof tier, 3x9 spruce  
State distances from centres. 1st tier 16 inches; 2d tier, 16 inches; 3d tier, 16 inches; 4th tier, 16 inches; 5th tier, 16 inches; 6th tier, 16 inches; 7th tier, \_\_\_\_\_ inches; 8th tier, \_\_\_\_\_ inches; roof tier, 2 inches.
20. If floors are to be supported by columns and girders, give the following information: Size and material of girders under 1st floor, 8x10 yellow pine under each of the upper floors, \_\_\_\_\_  
\_\_\_\_\_. Size and materials of columns under 1st floor, 12x16 brick piers under each of the upper floors, \_\_\_\_\_
21. If the front, rear or side walls are to be supported, in whole or in part, by iron girders or lintels, give definite particulars. The front, door openings to be spanned by two 8" = 65 lb. beams and the two window openings by two 4" = 55 lb. beams and all ends to rest on 12x12x6" stone templates in first story front.
22. If girders are to be supported by brick piers, and columns, state the sizes of piers and columns.  
\_\_\_\_\_  
\_\_\_\_\_ (See annexed sheet)
23. State by whom the construction of the building is to be superintended. Owner.

IF THE BUILDING IS TO BE OCCUPIED AS AN APARTMENT OR TENEMENT HOUSE, GIVE THE FOLLOWING PARTICULARS.

1. State how many families are to occupy each floor, and the whole number in the house; also, if any part is to be used as a store or for any other business purposes, state the fact, *There will be 4 families on each floor and family in basement including 25 fam in house*
2. What will be the heights of ceilings? 1st story, *11.6* feet; 2d story, *10.0* feet; 3d story, *9.6* feet; 4th story, *9.6* feet; 5th story, *9.6* feet; 6th story, *9.0* feet; 7th story, \_\_\_\_\_ feet.
3. How are the hall partitions to be constructed and of what materials? *3x4 hemlock studs well braced with ribs and leads set 16 from centre.*

Owners *Ray Stacom* Address *337 Pleasant Ave*  
 Architect *Charles Renty* Address *153 Fourth Ave.*  
 Mason \_\_\_\_\_ Address \_\_\_\_\_  
 Carpenter \_\_\_\_\_ Address \_\_\_\_\_

IF A WALL OR PART OF A WALL ALREADY BUILT IS TO BE USED, FILL UP THE FOLLOWING.

The undersigned give notice that *they* intend to use the *westerly* wall of building *No. 208 E. 10th St.* as party wall in the erection of the building hereinbefore described, and respectfully requests that the same be examined and a permit granted therefor. The foundation wall *is* built of *stone* *16* inches thick, *10.0* feet below curb; the upper wall *is* built of *brick* *12* inches thick, *50.3* feet deep, *42.0* feet in height.

(Sign here) *Ray Stacom*  
*per Charles Renty*

NOTE.—In making application for the erection of buildings the following drawings must be furnished: Plans of each and every story, front, rear and side elevations, and longitudinal and transverse sections. All plans must be drawn to a uniform scale and must be on tracing cloth, properly designated and colored.

THE BUILDING LAW REQUIRES:

- 1st—All stone walls must be properly bonded.
- 2d—All skylights having a superficial area of more than 9 square feet must be of iron and glass.
- 3d—All buildings over two stories or above 25 feet in height, *except dwellings, school houses, and churches,* on streets less than 30 feet wide, must have iron shutters on every window and opening above the 1st story. The front windows on streets over 30 feet wide are exempted.
- 4th—Outside fire escapes are required on all dwelling houses over two stories in height, occupied or built to be occupied by two or more families on any floor above the first, and on dwellings more than four stories in height, occupied by three or more families above the first floor, and on office buildings, hotels and lodging houses, factories, mills, workshops, hospitals, asylums and schools, all to be constructed as follows:

BALCONIES MUST NOT BE LESS THAN THREE FEET WIDE.

BRACKETS must not be less than  $\frac{1}{2}$  x  $1\frac{1}{4}$  inches wrought iron, placed edgewise, or  $1\frac{3}{4}$  inch angle iron  $\frac{1}{4}$  inch thick, well braced, and not more than three feet apart, and the braces to brackets must be not less than  $\frac{3}{4}$  inch square wrought iron, and must extend two-thirds of the width of the respective brackets or balconies. In all cases the brackets must go through the wall, and be turned down three inches.

BRACKETS ON NEW BUILDINGS must be set as the walls are being built. When brackets are to be put on old houses, the part going through the wall shall not be less than one inch diameter, with screw nuts and washers not less than five inches square and  $\frac{1}{2}$  inch thick.

TOP RAILS.—The top rail of balcony must be  $1\frac{3}{4}$  inch x  $\frac{3}{4}$  inch wrought iron or  $1\frac{1}{2}$  inch angle iron  $\frac{1}{4}$  inch thick, and in all cases must go through the walls, and be secured by nuts and  $\frac{1}{2}$  inch square washers, at least  $\frac{3}{8}$  inch thick, and no top rail shall be connected at angles by the use of cast iron.

BOTTOM RAILS.—Bottom rails must be  $1\frac{1}{4}$  inch x  $\frac{3}{4}$  inch wrought iron or  $1\frac{1}{2}$  inch angle iron  $\frac{1}{4}$  inch thick, well leaded into the wall. In frame buildings the top rails must go through the studding and be secured on the inside by washers and nuts as above.

FILLING-IN BARS.—The filling-in bars must be not less than  $\frac{1}{2}$  inch round or square wrought iron, placed not more than 6 inches from centres, and well riveted to the top and bottom rails.

STAIRS.—The stairs in all cases must be not less than 18 inches wide, and constructed of  $1\frac{1}{4}$  x  $3\frac{1}{2}$  inch wrought iron sides or strings. Steps may be of cast iron of the same width of strings, or  $\frac{5}{8}$  inch round iron, double rungs, and well riveted to the strings. The stairs must be secured to a bracket on top and rest on and be secured to a bracket or extra cross bar at the bottom. All stairs must have a  $\frac{3}{4}$  inch hand rail of wrought iron, well braced.

FLOORS.—The flooring of balconies must be of wrought iron  $1\frac{1}{4}$  x  $\frac{3}{4}$  inch slats placed not over  $1\frac{1}{4}$  inches apart, and secured to iron battens  $1\frac{1}{2}$  x  $\frac{3}{4}$  inch, not over three feet apart and riveted at the intersection. The openings for stairways in all balconies shall not be less than 20 inches wide and 30 inches long, and have no covers.

DROP LADDERS.—Drop ladders from lower balconies where required shall not be less than 14 inches wide, and shall be made of  $1\frac{1}{2}$  x  $\frac{3}{4}$  inch sides and  $\frac{5}{8}$  inch rungs of wrought iron. In no case shall a drop ladder be more than 12 feet in length. In no case shall the ends of balconies extend more than nine inches over the brackets.

SCUTTLE LADDERS.—Ladders to scuttles shall be constructed in all cases the same as the stairs or step-ladders from balconies of fire escapes.

THE HEIGHT OF RAILING around balconies shall not be less than two feet nine inches.

*No Fire Escape will be approved by this Bureau if not in accordance with above specifications.*

- 5th—All walls must be coped with stone or terra cotta. If coped with stone, the stone must not be less than  $2\frac{1}{2}$  inches thick; and if with terra cotta, the terra cotta must be made with proper lap joints.
- 6th—Roofs must be covered with fire-proof material.
- 7th—All cornices must be fire-proof.
- 8th—All FURNACE FLUES OF DWELLING HOUSES shall have at least eight inch walls on each side. No furnace flues shall be of less size than eight inches square, or four inches wide and sixteen inches long, inside measure. If preferred, the furnace flues may be made of cast iron or fire-clay pipe of proper size built in the walls, with an air space of not less than one inch between said pipes, and four inches of brick wall on the outside.  
 All flues not built for furnace or boiler flues must be altered to conform to the above requirements before they are used as such.
- 9th—No iron beam, lintel, or girder, intended to span an opening over eight feet, intended to support a wall, shall be used for that purpose, *until tested and approved as provided by law.*

Plan No. 850

*Copy*  
APPLICATION FOR ERECTION OF BUILDINGS.

Application is hereby made to erect a building — as per subjoined detailed statement of specification for Erection of Buildings, and I herewith submit Plans and Drawings of such proposed building — and I do hereby agree that the provisions of the Building Law *will be complied with whether the same are specified herein or not.*

NEW YORK, June 10<sup>th</sup> (Sign here) Charles Renty. 1891

1. State how many buildings to be erected. One
2. How occupied? If for dwelling, state the number of families. In ellings. 24 families in house.
3. What is the street or avenue and the number thereof? Give diagram of property. No. 206  
E. 10<sup>th</sup> St.
4. Size of lot. No. of feet front, 25.0; No. of feet rear, 25.0; No. of feet deep, 92.3/4
5. Size of building. No. of feet front, 25.0; No. of feet rear, 25.0; No. of feet deep, 80.6  
No. of stories in height, 6; No. of feet in height from curb level to highest point of roof beams, 69.10
6. What will each building cost exclusive of the lot? \$ 24,000<sup>00</sup>/<sub>100</sub>
7. What will be the depth of foundation walls from curb level or surface of ground? 10 ft.
8. Will foundation be laid on earth, sand, rock, timber or piles? Natural Soil
9. What will be the base, stone or concrete? stone If base stones, give size and thickness and how laid. 30 x 36 x 8" laid coursewise If concrete, give thickness. \_\_\_\_\_
10. What will be the sizes of piers? 12 x 16"
11. What will be the sizes of the base of piers? 2.0 x 2.0 x 8"
12. What will be the thickness of foundation walls? 16 - 20 x 24 Of what material constructed? Hard burnt brick & good blue Bedg stone laid in cement mortar.
13. What will be the thickness of upper walls? Basement, \_\_\_\_\_ inches; 1st story, 12-16 + 20 inches; 2d story, 12 1/6 inches; 3d story, 12 1/6 inches; 4th story, 12 1/6 inches; 5th story, 12 1/6 inches; 6th story, 12 1/6 inches; 7th story, \_\_\_\_\_ inches, and from thence to top, 12 inches. Of what materials to be constructed? Hard burnt brick in lime mortar
14. State whether independent or party walls. eastern wall party, other independent.
15. With what material will walls be coped? 1/2 brick stone
16. What will be the materials of front? stone in basement If of stone, what kind? Brown stone  
Give thickness of ashlar. 4" Give thickness of backing in each story. 20" esp. 16"
17. Will the roof be flat, peaked or mansard? Flat
18. What will be the materials of roofing? Iron
19. Give size and materials of floor beams. 1st tier, 3x10 spruce; 2d tier, 3x10 spruce; 3d tier, 3x10 spruce; 4th tier, 3x10 spruce; 5th tier, 3x10 spruce; 6th tier, 3x10 spruce; 7th tier, \_\_\_\_\_; 8th tier, \_\_\_\_\_; roof tier, 3x9 spruce  
State distances from centres. 1st tier 16 inches; 2d tier, 16 inches; 3d tier, 16 inches; 4th tier, 16 inches; 5th tier, 16 inches; 6th tier, 16 inches; 7th tier, \_\_\_\_\_ inches; 8th tier, \_\_\_\_\_ inches; roof tier, 2 inches.
20. If floors are to be supported by columns and girders, give the following information: Size and material of girders under 1st floor. 8x10 yellow pine under each of the upper floors, \_\_\_\_\_  
Size and materials of columns under 1st floor, 12x16 brick piers under each of the upper floors, \_\_\_\_\_
21. If the front, rear or side walls are to be supported, in whole or in part, by iron girders or lintels, give definite particulars. The front, door openings to be spanned by two 8"-65 lb. beams and the two window openings by two 4"-55 lb. beams and all ends to rest on 12"x12"x6" stone columns in first story front.
22. If girders are to be supported by brick piers and columns, state the sizes of piers and columns.  
(See annexed sheet)
23. State by whom the construction of the building is to be superintended. Owner

PLAN No. 850 *M. B.*

New York, June, 10<sup>th</sup> 1891

To Thomas J. Brady,  
Superintendent of Buildings.


Sir:

It is proposed to erect a tenement building on premises located No. 206 E. 10<sup>th</sup> St.

in the City of New York, in accordance with the Plans and detailed statement of Specification for said work, now on file in the Bureau of Inspection of Buildings, and I respectfully ask that the provisions of the Building Laws may be modified so far as to allow

us to use the ~~existing~~ wall of building No 208 E. 10<sup>th</sup> St. as a party wall and the said is 16" thick in basement and 12" thick to height of roof beams, and 42.0" in height, 50.3" deep, and 10 ft. below curb level and said wall being in good condition.

We therefore propose to line the said party wall 16" in basement, 12" in 1<sup>st</sup> and 2<sup>nd</sup> stories and 8" above to height of old wall and thence to cornice on 6" on old wall and build an independent wall 12" thick to height of proposed roof beams, and all back lining to be well tied and bonded to old work and have anchors every 5 ft. apart all to be well laid in cement mortar.

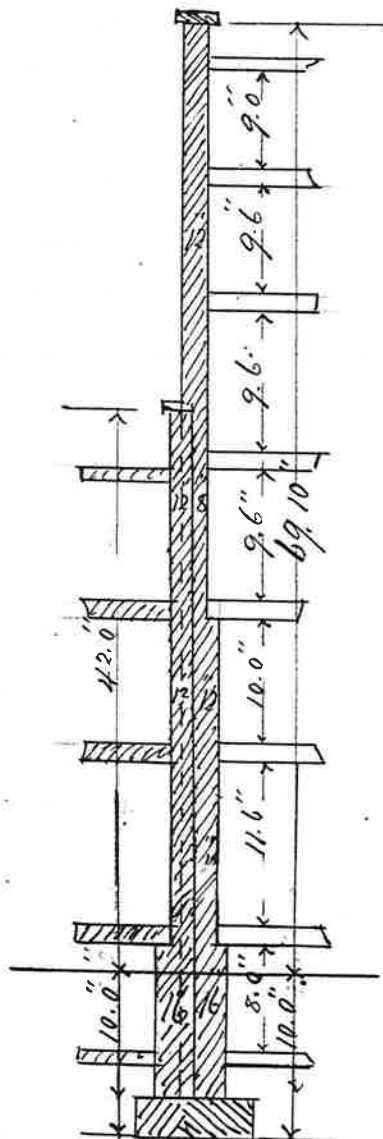

Hoping that you will favorably consider the same  
 We remain Yours Respy  
 T. J. Stinson.  
 J. Charles Bentley

**City and County of New York, ss:**

..... of said City and County,  
being duly sworn, doth depose and say, that he has read the foregoing petition,  
and that the same is true.

Subscribed and sworn to before me, this }  
day of ..... 189 }

ORIGINAL

RECEIVED  
DEPT OF HOUSING & BUILDINGS  
BROOKLYN

CITY OF NEW YORK  
DEPARTMENT OF HOUSING AND BUILDINGS

**ALTERED BUILDING**

NOTICE—This Application must be TYPEWRITTEN and filed in QUADRUPPLICATE

P.D.  
ALT. No. 1823 19 54 BLOCK 451 LOT 14

LOCATION 206 E. 10th Street Southside 125' East of 2nd Avenue  
House Number, Street, Distance from Nearest Corner and Borough

12/4/56  
not affected by  
change  
OK

ZONING: USE DIST. Bus. HEIGHT DIST. 1 1/2 AREA DIST. B

# TR.  
12/3/54

Initial fee payment—Amount \$ 5 1st Receipt No. 61327  
Date OCT 25 1954 Cashier Greenberg

2nd payment of fee to be collected before a permit is issued—Amount \$ 29 (34-5)  
Verified by Curilla P.E. Date AUG 7 1956

2nd Receipt No. 13287 Date AUG 7 - 1956 Cashier Greenberg

EXAMINED AND RECOMMENDED FOR APPROVAL ON June 10<sup>th</sup> 1955 June 10, 1955  
APPROVED JUN 24 1955 19  
Examiner. L. Kunkel  
Joseph E. Sherman 4/13/55  
BROOKLYN SUPERINTENDENT

**SPECIFICATIONS**

- (1) Classification of Buildings to be Altered. (NOTE—See C26-238.0) N.F.P. Old Law Class 3
- (2) Any other buildings on lot or permit granted for one? no  
Is building on front or rear of lot? front
- (3) Use and Occupancy. Class A. M.D. Old Law 24 apartments  
(NOTE—If a multiple dwelling, authorization of owner must be filed)  
A new C of O (~~will~~) (will not) be required.

STORY (Include cellar and basement)	EXISTING LEGAL USE			PROPOSED OCCUPANCY						
	Apts.	ROOMS	USE	LIVE LOAD	NO. OF PERSONS			APTS.	ROOMS	USE
					MALE	FEMALE	TOTAL			
cellar			heating & storage							heating & storage
1st	4	12	4 fam.	40				4	10	dwelling & 4 fam.
2nd	4	12	4 fam.	40				4	10	dwelling & 4 fam.
3rd	4	12	4 fam.	40				4	10	dwelling & 4 fam.
4th	4	12	4 fam.	40				4	10	dwelling & 4 fam.
5th	4	12	4 fam.	40				4	10	dwelling & 4 fam.
6th	4	12	4 fam.	40				4	10	dwelling & 4 fam.
CLASS A	M.D.	OLD LAW								CLASS A. M.D. OLD LAW 24 APARTMENTS.

(4) State generally in what manner the Building will be altered:

Construct bathrooms on all floors.  
Remove plumbing shown dotted.  
Kitchens altered at front and rear, south apartments.

(5) Size of Existing Building:

At street level	25	feet front	80	feet deep	25	feet rear
At typical floor level	25	feet front	80	feet deep	25	feet rear
Height <sup>1</sup>	6	stories	6	feet		

(6) If volume of Building is to be changed, give the following information:

At street level		feet front		feet deep		feet rear
At typical floor level	no change	feet front	no change	feet deep	no change	feet rear
Height <sup>1</sup>		stories		feet		

Area <sup>2</sup> of Building as Altered: At street level	Total floor area <sup>2</sup>	sq. ft.
Total Height <sup>3</sup>	Additional Cubic Contents <sup>4</sup>	cu. ft.

(7) Estimated Cost of Alteration:<sup>5</sup> ~~6000.00~~ 12000.00 *Ans 8/7/56*  
Estimated Cost, exclusive of extension:

(8) Is Application made to remove violations? *yes* If Yes, State Violation Numbers Housing Div.

(9) If building is to be enlarged or extended or floor loads increased, Soil Data shall be submitted in accordance with Sec. C26-376.0. For alterations of a minor nature, the Applicant certifies that he has investigated the nature of the soil and finds the following:

Character of soil	Bearing capacity
-------------------	------------------

(10) State what disposition will be made of waste and sewage  
(Public sewer, Private sewer, Cesspool, etc.) *existing system*

(11) Does this Application include Dropped Curb? *no*  
(If Drop Curb Permit is obtained with this Application, DIAGRAM showing the relative position of drop curb and extent thereof must be included on plot diagram.<sup>6</sup>

Drop Curb	ft. @ \$	per ft. Splay	ft. @ \$	per ft.
Exact distance from nearest corner to Curb Cut:			feet.	
Deposit: \$	Fee: \$	Total: \$		
Paid	19	Document No.	Cashier	

(12) Temporary Structures between Street Line and Curb:

Will a Sidewalk Shed be required?	Length	feet.
Will any other miscellaneous temporary structures be required?		
Fee Required	Fee Paid	19 . Document No. . Cashier

---

1. The term "height" of a structure shall mean the vertical distance from the curb level to the highest point of the roof beams in the case of flat roofs or to a point at the average height of the gable in the case of roofs having a pitch of more than one foot in four and one-half, except that in the case of structures where the grade of the street has not been legally established or where the structure does not adjoin the street, the average level of all the ground adjoining such structures shall be used instead of the curb level.

2. In computing this area, measurement shall be taken to the outside surfaces of exterior walls at each floor. Courts, yards, etc., shall be excluded. The areas of cellars and basements shall not be included.

3. Total height shall be measured from 6 inches below the lowest finished floor to the outside of the roof, and in case of sloping roofs, to the average height.

4. The cubical contents is the actual space enclosed within the outer surfaces of the outside walls and between the outer surface of the roof and six inches below the surface of the lowest floors. This includes the cube of dormers, penthouses, vaults, pits, enclosed porches, and other enclosed appendages. Outside steps, terraces, footings, courts, yards, light shafts and buildings detached from the main structure are not to be included. (Detached structures are to be separately computed.)

5. "Estimated Cost" for computation purposes on alteration of existing buildings or structures shall be the cost of all contemplated construction, including plumbing work, elevator work, standpipe fire line work, automatic sprinkler, fuel oil, air conditioning, etc.

6. Space for plot diagram is located on Affidavit Form.

7. Use should be related to pertinent legal terms, e.g., use terms like factory rather than loft, auto repairs rather than brake testing, etc.

8. If fuel burning equipment is to be installed Smoke Control Equipment Form must accompany this application.

---



ORIGINAL

DEPARTMENT OF HOUSING AND BUILDINGS

BOROUGH OF ~~Borough~~ Manhattan, CITY OF NEW YORK

MANHATTAN  
Municipal Bldg.,  
New York 7

BROOKLYN  
Municipal Bldg.,  
Brooklyn 1

BRONX  
1932 Arthur Ave.,  
New York 57

QUEENS  
120-55 Queens Blvd.,  
Kew Gardens 24, L. I.

RICHMOND  
Boro Hall,  
St. George 1, S. I.

NOTICE—This Application must be TYPEWRITTEN and filed in TRIPLICATE, and ONE copy sworn to by Applicant. A copy must be kept in plain view on the work at all times until completion.

1588 PERMIT

PERMIT No. 1956 N. B. ALT. ELEV. SIGN } Application No. 1823 1954

LOCATION 206 East 10th. St BLOCK 451 LOT 14

FEES PAID FOR

NOTE—Trees in streets fronting on site are under jurisdiction of Department of Parks. They must be protected and written notification made to that Department at least 48 hours prior to commencement of work.

Permit must be obtained from Borough President's Office for Material Storage, Hoist or Mixing Machines beyond the building line.

New York City Aug. 6, 1956 19

To the Borough Superintendent: Application is hereby made for a PERMIT to perform the entire

work described in the above numbered application and the accompanying plans. If no work is performed within one year from the time of issuance, this permit shall expire by limitation as provided by law; and the applicant agrees to comply with all provisions of the Building Code of the City of New York and with the provisions of all other laws and rules relating to this subject. Compensation insurance has been secured in accordance with the requirements of the Workmen's Compensation Law as follows:

Employers Mut. Lia. 517-2-37484 exp. 1-1-57

When the policy of a general contractor does not fully cover the work of any sub-contractor, such sub-contractor must file a certificate of workmen's compensation covering his particular work. No work is to be commenced by this sub-contractor until his certificate has been submitted and approved by this department.

No certificate of occupancy will be issued unless the construction work covered by this permit will be supervised by a Licensed Architect, or a Professional Engineer, or by a Superintendent of Construction, having at least ten years' experience, acceptable to the Borough Superintendent. An affidavit shall be filed indicating such supervision, as required by Section 2.1.3.7 of the Building Code.

Name and address of person designated for this supervision is as follows:

Name Anthony Giurdanella Address 432 E. 11th St NY

STATE AND CITY OF NEW YORK } ss. Anthony Giurdanella for Giurdanella Bros. Inc. COUNTY OF Typewrite Name of Applicant

being duly sworn, deposes and says: That he resides at Number 432 E. 11th St in the Borough of Manhattan in the City of N.Y., in the County of N.Y. in the State of N.Y., that he is agent for contractor for owner in fee of all that certain lot, piece or parcel of land, shown on the diagram annexed to the approved application and made a part thereof, situate, lying and being in the Borough of Man., City of New York aforesaid, and known and designated as Number 206 E. 10th St

and therein more particularly described; that the work proposed to be done upon the said premises, in accordance with the approved application and accompanying plans is duly authorized by Dofron Realty Corp.

and that Giurdanella Bros. Inc. owner is duly authorized by the aforesaid to make application for a permit to perform said work set forth in the approved application and accompanying plans, and all the statements herein contained are true to deponent's own knowledge.

(SIGN HERE) Anthony Giurdanella

Sworn to before me, this 6th

day of Aug. 10 56

Notary Public or Commissioner of the City of New York

Satisfactory evidence having been submitted as indicated above that compensation insurance has been secured in accordance with the Workmen's Compensation Law, a permit is hereby issued for the performance of the work described in the above numbered application and the accompanying plans.

EXAMINED AND RECOMMENDED FOR APPROVAL ON 19

Approved 19 Borough Superintendent

# CITY OF NEW YORK DEPARTMENT OF HOUSING AND BUILDINGS

MANHATTAN  
Municipal Bldg.,  
New York 7

BROOKLYN  
Municipal Bldg.,  
Brooklyn 1

BRONX  
1932 Arthur Avenue  
New York 57

QUEENS  
120-55 Queens Blvd.,  
Kew Gardens 24, L. I.

RICHMOND  
Boro Hall  
St. George 1, S. I.

## AMENDMENT

NOTICE—This Amendment must be TYPEWRITTEN and filed in TRIPLICATE

Alt. APPLICATION No. 1823 1954 BLOCK 451 LOT 14  
 (N. B., Alt., Elev., etc.)

LOCATION 206 E 10th Street W/S 125'0" East of 2nd Avenue Manhattan  
 House Number Street Distance from Nearest Corner Borough

Date July 16, 19 57

Application is hereby made to the Borough Superintendent for approval of the following AMENDMENT to the specifications and plans filed with the above numbered application, with the stipulation that this amendment is to become a part of the aforesaid original application and subject to all the conditions, agreements and statements therein contained.


Applicant Frank Randazzo Signature [Signature]  
Address 383 Pearl Street Brooklyn, N.Y.



### CONSTRUCTION:

- BUILD UP DOOR OPENINGS FROM PUBLIC HALL TO TOILET ROOMS ON THE 1st, 2nd, 3rd, 4th, 5th and 6th floor. MAKE NEW OPENINGS FROM BEDROOM TO TOILET ROOM. SEE SKETCH BELOW.

ADDITIONAL COST. \$900.00

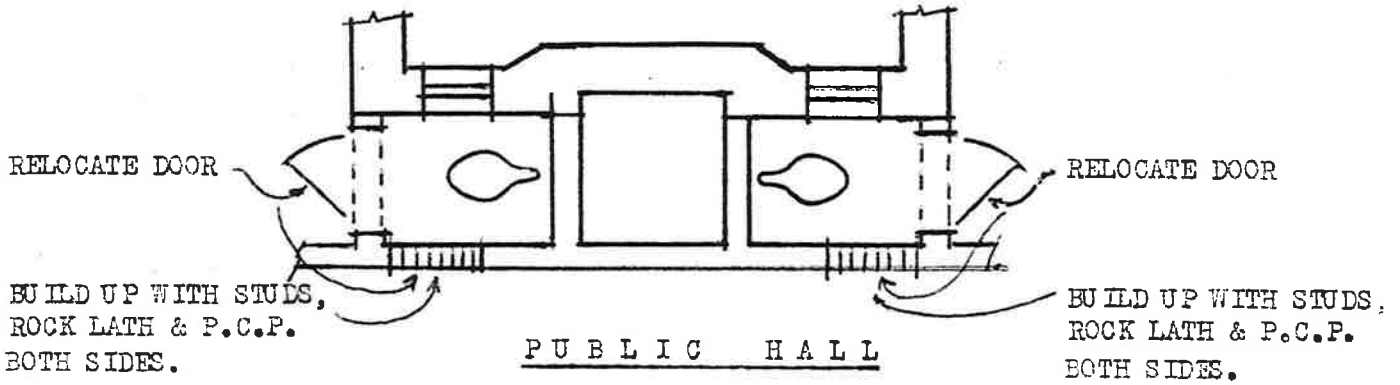

Estimated Cost: This Amendment \$..... Fee Required \$ None Verified by [Signature]  
 Fee Paid.....19..... Document No..... Cashier.....

NOTE—The applicant must not use the back of this sheet. If more space is needed, additional sheets must be used. No item must be continued over to another sheet; but each item must be complete on the sheet on which it appears. Only those items that appear above the endorsements at the bottom of the page can be considered.

EXAMINED AND RECOMMENDED FOR APPROVAL ON 7/25 19 57 [Signature] Examiner

APPROVED JUL 31 1957 19 [Signature] Borough Superintendent