

ALTERATIONS, ADDITIONS, OR REPAIRS TO
BUILDINGS, ALREADY ERECTED.

1. State how many buildings to be altered, *One*
2. What is the Street or Avenue, and the number thereof, *No 391 Bowery*
3. Ward, *17th*

PRESENT BUILDING.

Give the following information as to the present building :

1. Size of lot on which it is located, No. feet front *23* ; feet rear, *23* ; feet deep, *90*
2. Size of building, No. feet front, *23* ; feet rear, *23* ; feet deep, *100* ; No. of stories in height, *2 1/2* ; No. of feet in height, from curb level to highest point, *32*
3. Material of Building, *Brick* ; Material of Front, *Brick*
4. Whether roof is Peak, Flat, or Mansard, *Peak*
5. Material of Roofing, *Tin*
6. Depth of foundation walls, *7* feet. Thickness of foundation walls, *20* inches. Material of foundation walls, *Stone*
7. Thickness of upper walls, *12* inches. Material of upper walls, *Bricks*
8. Whether Independent or Party-walls, *Independent*
9. Whether there is any other building on the lot, *None*
10. How the building is occupied, *Lager Beer Saloon*

HOW TO BE ALTERED.

IF RAISED OR BUILT UPON,

Give the following information :

1. How many stories will the building be when raised,
2. How many feet high will the building be when raised,
3. Will the roof be Flat, Peak, or Mansard,
4. What will be the material of roofing,
5. What will be the material of cornices and gutter,
6. What will be the means of access to roof,
7. Will a Fire-escape be provided, if required,
8. Will Iron shutters be provided, if required,
9. How will the building be occupied,

IF EXTENDED ON ANY SIDE,

Give the following information :

- 1. Size of extension, No. of feet front, 23 ; feet rear, 23 ; feet deep, 15 ; No. of stories in height, 2 ; No. of feet in height, 21
- 2. What will be the material of foundation walls of extension, None . What will be the depth, 11 feet. What will be the thickness, 16 inches.
- 3. What will be the material of upper walls of extension Bricks . How thick will the upper walls be, 8 inches. *Part of wall now standing on either side to be used, the sturdy side and rear walls to be new.*
- 4. Will the roof of extension be Flat, Peak, or Mansard, Flat
- 5. What will be the material of roofing, Tin
- 6. What will be the material of cornice and gutter, _____
- 7. Will iron shutters be provided, if required, _____
- 8. How will the extension be occupied, 1 Meeting Room and 3 other Rooms
- 9. How will the extension be connected with present or main building, Arrows in rear wall of main building

IF ALTERED INTERNALLY,

Give definite particulars, and state how the building will be occupied, and if for a dwelling, state by how many families.

One Family

IF THE FRONT, REAR, OR SIDE WALLS, OR ANY PORTION THEREOF, ARE TO BE TAKEN OUT AND REBUILT,

Give Definite particulars, and state in what manner.

THE FOLLOWING INFORMATION IS ALSO REQUIRED :

- 1. If the building is to be occupied as a tenement building after the proposed alteration, will it be altered in every respect to conform with the provisions of Section 28 of the Building Law, _____

2. How much will the Alteration cost, \$ 700

3. Will all materials and workmanship be in accordance with the provisions of the Law, Yes

Owner Patrick Peavin Address 125 1/2 Ave. East 9th

Architect George Hilgert Address _____

Mason Martin Gummer Address 111 E. East 71st St

Carpenter _____ Address _____

574/1875

Original

6000
2000-2000

DETAILED STATEMENT OF SPECIFICATIONS FOR ALTERATIONS, ADDITIONS, OR REPAIRS TO BUILDINGS, ALREADY ERECTED.

461

- 1. State how many buildings to be altered, One
- 2. What is the Street or Avenue, and the number thereof, No. 391 Bowery
- 3. Ward, 11th

PRESENT BUILDING.

Give the following information as to the present building :

- 1. Size of lot on which it is located, No. feet front, 25; feet rear, 25; feet deep, 40
- 2. Size of building, No. feet front, 25; feet rear, 25; feet deep, 38; No. of stories in height, 2 1/2; No. of feet in height, from curb level to highest point, 33
- 3. Material of Building, Brick; Material of Front, Brick
- 4. Whether roof is Peak, Flat, or Mansard, Peak
- 5. Material of Roofing, Shingle
- 6. Depth of foundation walls, 8 feet. Thickness of foundation walls, 10 inches. Material of foundation walls, Brick and Stone
- 7. Thickness of upper walls, 12 inches. Material of upper walls, Brick
- 8. Whether Independent or Party-walls, independent
- 9. Whether there is any other building on the lot, none
- 10. How the building is occupied, as a Store & Dwelling

HOW TO BE ALTERED.

IF RAISED OR BUILT UPON,

Give the following information :

- 1. How many stories will the building be when raised, _____
- 2. How many feet high will the building be when raised, _____
- 3. Will the roof be Flat, Peak, or Mansard, _____
- 4. What will be the material of roofing, _____
- 5. What will be the material of cornices and gutter, _____
- 6. What will be the means of access to roof, _____
- 7. Will a Fire-escape be provided, if required, _____
- 8. Will Iron shutters be provided, if required, _____
- 9. How will the building be occupied, _____

[Faint handwritten notes at the bottom of the page]

IF EXTENDED ON ANY SIDE,

Give the following information:

- Size of extension, No. of feet front, _____; feet rear, _____; feet deep, _____; No. of stories in height, _____; No. of feet in height, _____.
- What will be the material of foundation walls of extension, _____ What will be the depth, _____ feet. What will be the thickness, _____ inches.
- What will be the material of upper walls of extension _____ How thick will the upper walls be, _____ inches.
- Will the roof of extension be Flat, Peak, or Mansard, _____
- What will be the material of roofing, _____
- What will be the material of cornice and gutter, _____
- Will iron shutters be provided, if required, _____
- How will the extension be occupied, _____
- How will the extension be connected with present or main building, _____

IF ALTERED INTERNALLY,

Give definite particulars, and state how the building will be occupied, and if for a dwelling, state by how many families.

Part of front type of floor will be replaced (2) of depth equal to the width of the same and to rest on a 2x8" spruce girder

IF THE FRONT, REAR, OR SIDE WALLS, OR ANY PORTION THEREOF, ARE TO BE TAKEN OUT AND REBUILT,

Give Definite particulars, and state in what manner.

2nd & 3rd floor front ^{brick} facades will be taken down, front & base up, and a base run back with a brace and tension rod with 12" brick arch over the same front supported by one 6x12 + one 6x12" cast iron

THE FOLLOWING INFORMATION IS ALSO REQUIRED.

- If the building is to be occupied as a tenement building after the proposed alteration, will it be altered in every respect to conform with the provisions of Section 28 of the Building Law, yes
- How much will the Alteration cost, \$ 2000.00
- Will all materials and workmanship be in accordance with the provisions of the Law, yes

Owner Ch. Burghart Address No. 137 7th Avenue
 Architect C. Holzeit Address No. 352 W. 28th St.
 Mason _____ Address _____
 Carpenter P. J. Falce Address No. 416 W. 41st St.

Give
 cost from estimate with front
 walls replaced.

1. State how many buildings to be altered, One
 2. What is the Street or Avenue, and the number thereof, 391 Bonney
14th
 3. Ward, _____

— 0 —

PRESENT BUILDING.

Give the following information as to the present building :

1. Size of lot on which it is located, No. feet front 24 ; feet rear, 24 ; feet deep, 70
2. Size of building, No. feet front 24 ; feet rear, 24 ; feet deep, 35 ; No. of stories ~~2 1/2~~ in height, 2 1/2 ; No. of feet in height, from curb level to highest point, 35
3. Material of Building, Brick ; Material of Front, Brick
4. Whether roof is Peak, Flat, or Mansard, Peak
5. Material of Roofing, Tim
6. Depth of foundation walls, 10 feet. Thickness of foundation walls, 20 inches, Material of foundation walls, Brick
7. Thickness of upper walls, 12 inches. Material of upper walls, Brick
8. Whether Independent or Party-walls, Party + Judgment
9. Whether there is any other building on the lot, None
10. How the building is occupied, Store & Dwelling

— 0 —

HOW TO BE ALTERED.

IF RAISED OR BUILT UPON

Give the following information :

1. How many stories will the building be when raised, _____
2. How many feet high will the building be when raised, _____
3. Will the roof be Flat, Peak, or Mansard, _____
4. What will be the material of roofing, _____
5. What will be the material of cornices and gutter, _____
6. What will be the means of access to roof, _____
7. Will a Fire-escape be provided, if required, _____
8. Will Iron Shutters be provided, if required, _____
9. How will the Building be occupied, _____

Wm. A. Schmidt
 July 21 - 1880

IF EXTENDED ON ANY SIDE,

Give the following information :

1. Size of extension, No. of feet front, _____; feet rear, _____; feet deep, _____; No. of stories in height, _____; No. of feet in height, _____.
2. What will be the material of foundation wall _____ . What will be the depth, _____ feet. What will be the _____
3. What will be the material of upper walls of extension _____ inches.
4. Will the roof of extension be Flat, Peak, or Mansard _____
5. What will be the material of roofing, _____
6. What will be the material of cornice and gutter, _____
7. Will iron shutters be provided, if required, _____
8. How will the extension be occupied, _____
9. How will the extension be connected with present building _____

New York, Jan. 19, 1876

This is to certify that the
 Box 12 inch wide by 17 ft long
 has been used Cor. of Broadway
 and 8th St. carrying a 3 story
 Brick Wall.

Chas. Heilmann
 64 1/2 E. 17th St
 City

IF ALTERED

Give definite particulars, and state how the building

IF THE FRONT, REAR, OR SIDE WALLS, OR ANY PORTION THEREOF, ARE TO BE TAKEN OUT AND REBUILT,

Give Definite particulars, and state in what manner.

Take out the middle pier in rear & support the upper wall
 with a cast iron box lintel resting on 16 in x 12 brick pier & build
 a cap stone of granite 8 in thick, lintel to be tested

THE FOLLOWING INFORMATION IS ALSO REQUIRED:

1. If the building is to be occupied as a tenement building after the proposed alteration, will it be altered in every respect to conform to the provisions of Section 28, of the Building Law, Yes
2. How much will the Alteration cost, \$1150
3. Will all materials and workmanship be in accordance with the provisions of the Law, Yes

Owner _____ Address _____
~~Architect~~ John Weepelman Address _____
 Mason _____ Address _____
 Carpenter 391 Bowery Address _____

Fred Schmidt
 #
 Builder


Front.

38 ft


Beams

Beams will be lowered
as far as to be level with others

574-Add

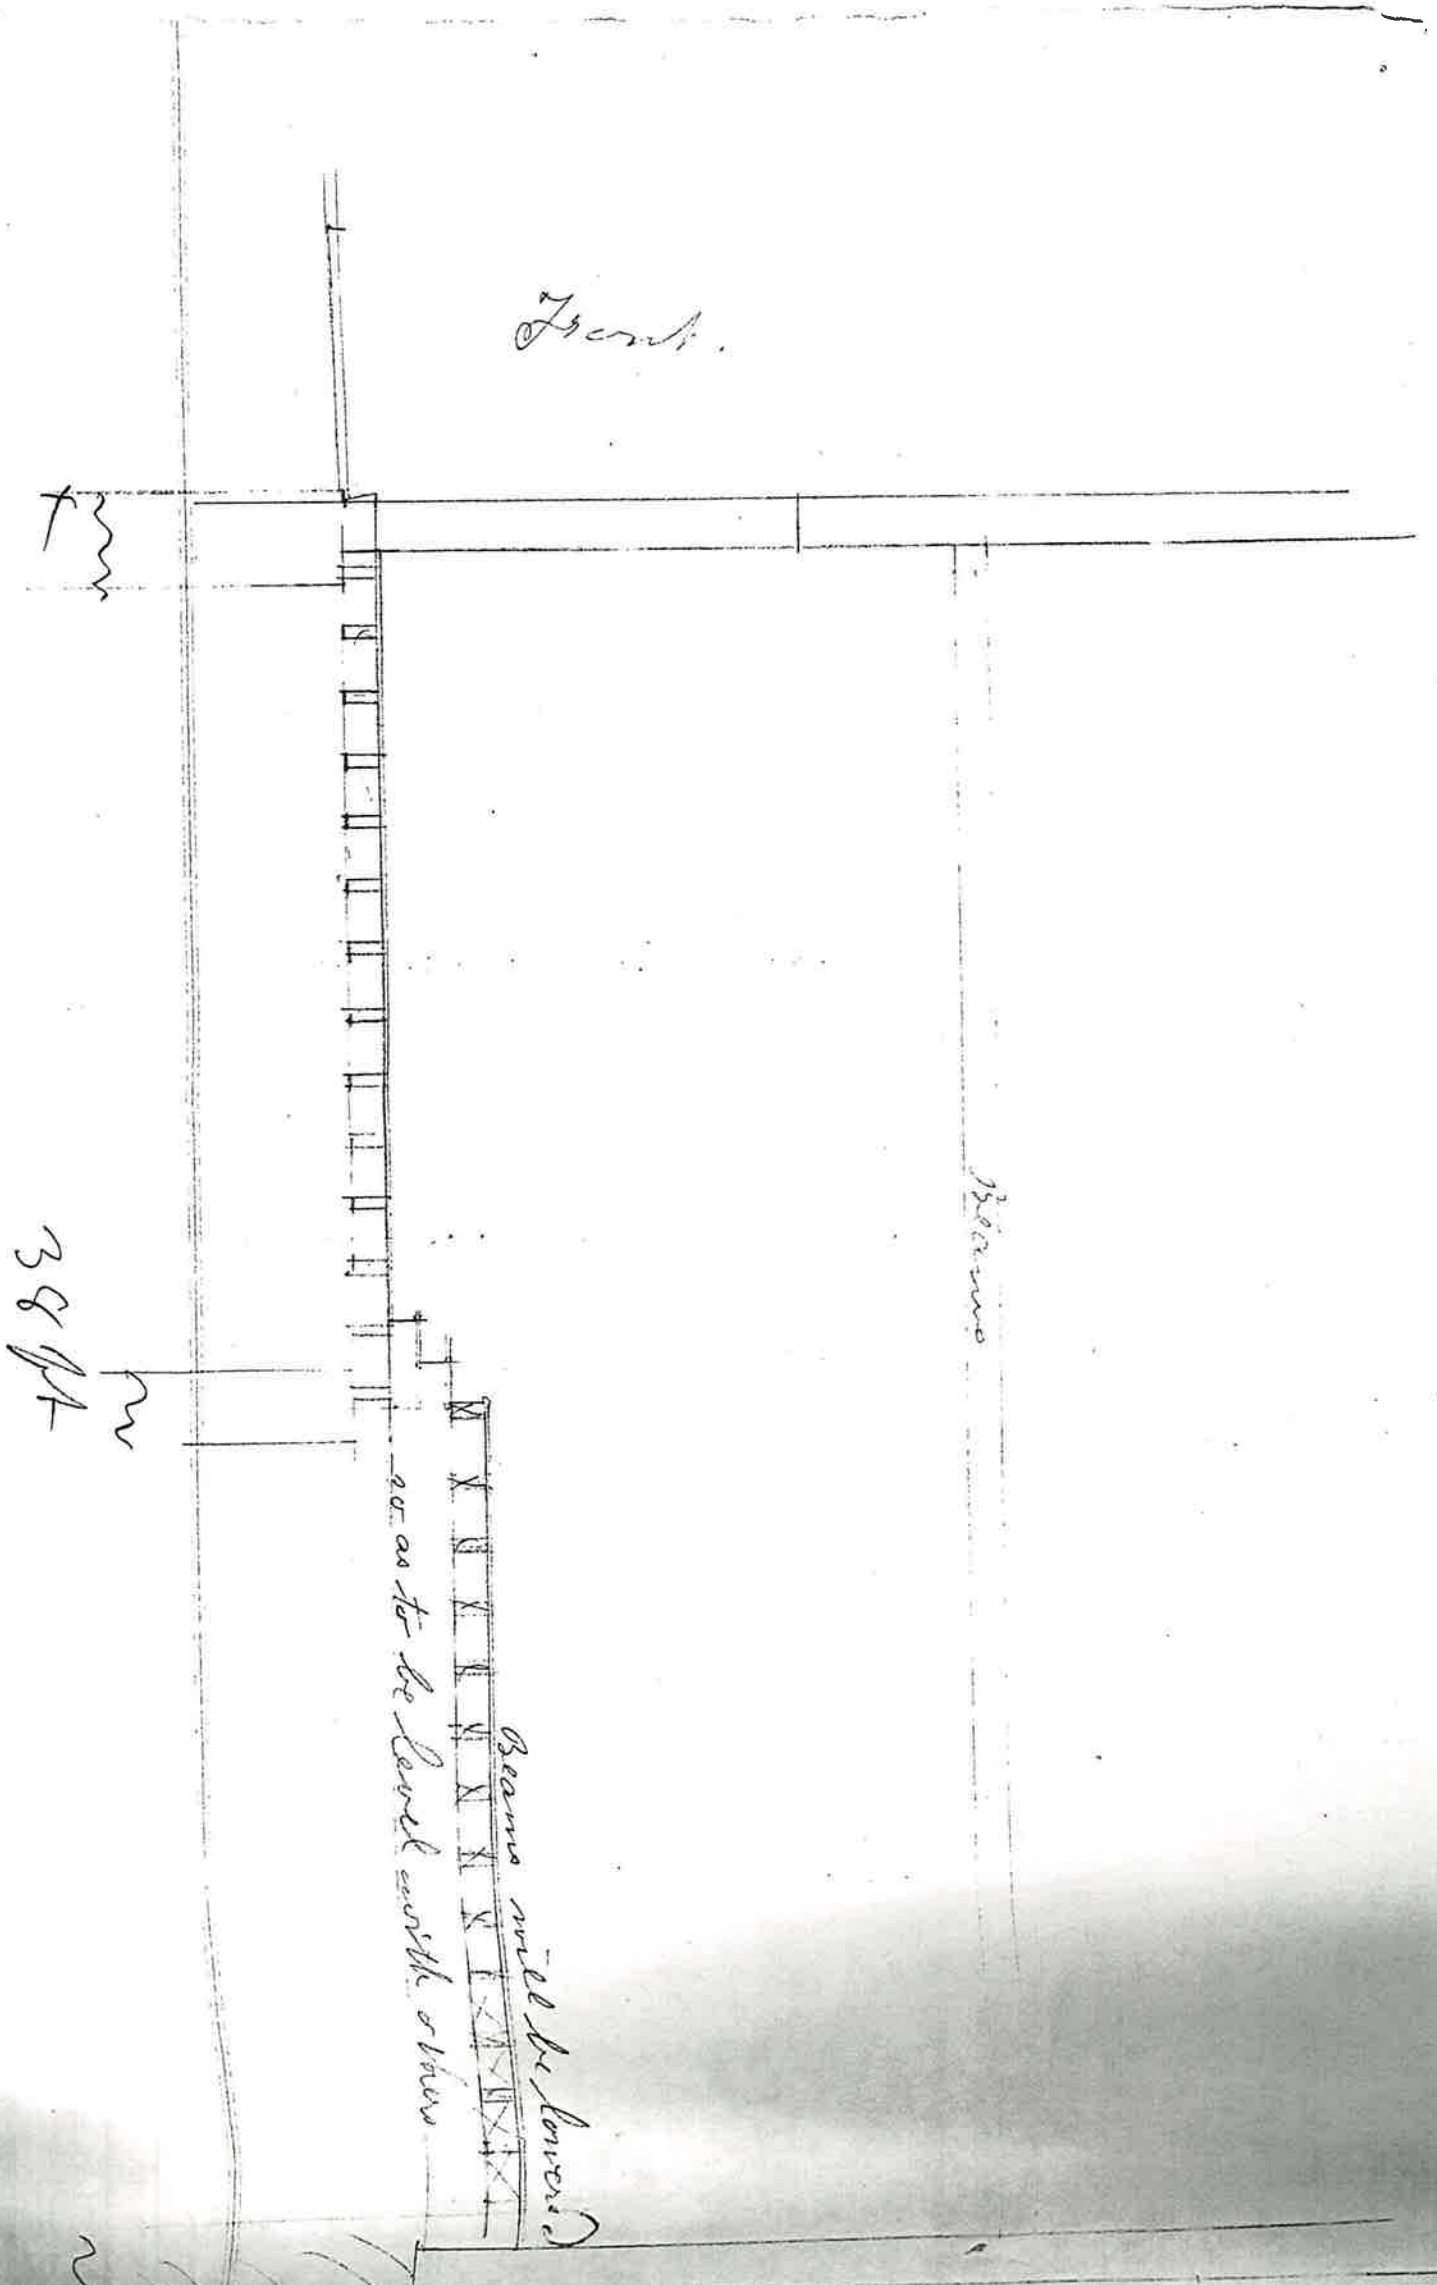

#35

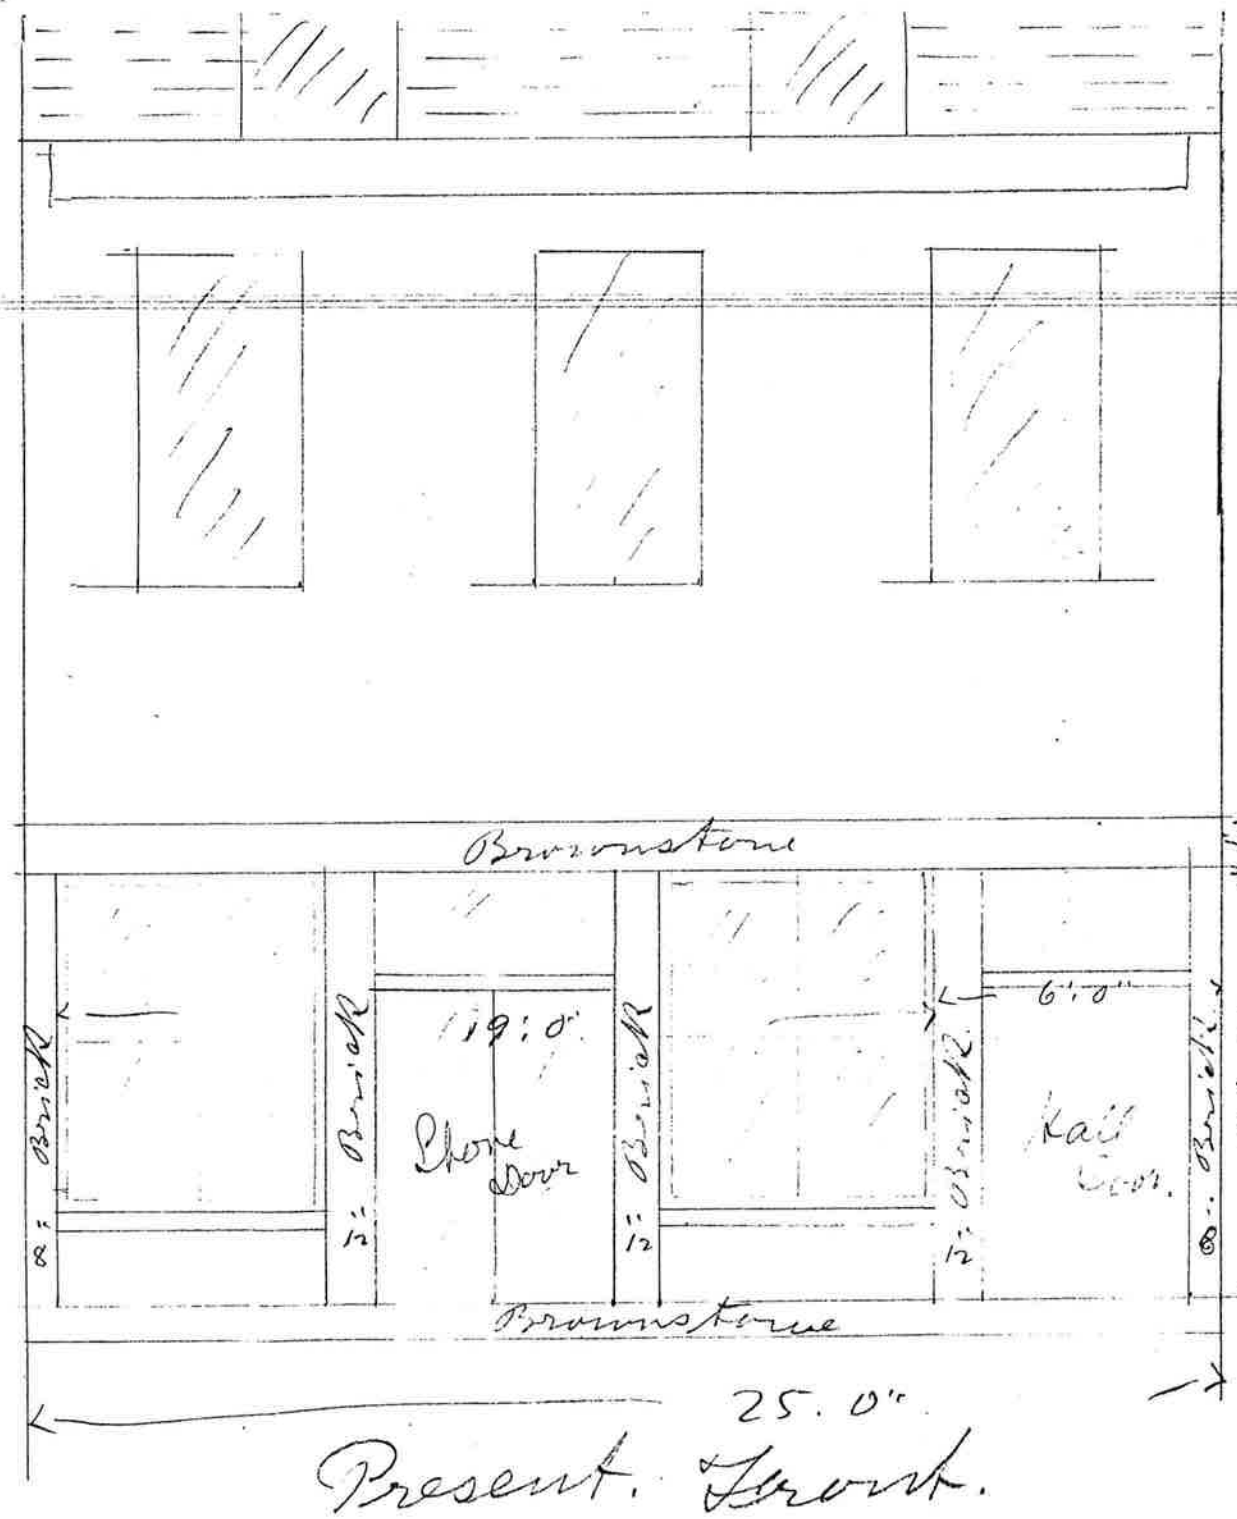

25.0'
Present. Front.

Brownstone

19.0'

Shore door

6.0'

Kail door

7.5'

9.0'

Brownstone

Brick

Brick

Brick

Brick

Brick

Original

4

FORM No. 2.

Plan No. 1923/1895

APPLICATION TO ALTER, REPAIR, Etc.

461
6

Application is hereby made to the Superintendent of Buildings of the City of New York, for the approval of the detailed statement of the specifications and plans herewith submitted, for the alteration or repair of the building herein described. All provisions of the Building Law shall be complied with in the alteration or repair of said building, whether specified herein or not.

(Sign here) Hans Bergmann

NEW YORK, Dec 9 1895

- 1. State how many buildings to be altered. One
- 2. What is the street or avenue and the number thereof? Give diagram of property. 391 - Bontary
- 3. How much will the alteration cost? \$ 3500

GIVE THE FOLLOWING INFORMATION AS TO THE PRESENT BUILDING:

- 1. Size of lot on which it is located, No. of feet front, 24; feet rear, 24; feet deep, 90
- 2. Size of building, No. of feet front, 24; feet rear, 24; feet deep, 60 No. of stories in height, 2 1/2; No. of feet in height from curb level to highest point of beams, 30
- 3. Material of building, Brick; material of front, Brick
- 4. Whether roof is peak, flat, or mansard, Mansard
- 5. Depth of foundation walls 10 feet; thickness of foundation walls, 20; materials of foundation walls, Stone
- 6. Thickness of upper walls, 12" inches. Material of upper walls, Brick
- 7. Whether independent or party walls, Independent
- 8. How the building is or was occupied, Store & Dwelling

IF TO BE RAISED OR BUILT UPON, GIVE THE FOLLOWING INFORMATION:

- 1. How many stories will the building be when raised?
- 2. How high will the building be when raised?
- 3. Will the roof be flat, peak, or mansard?
- 4. What will be the thickness of wall of additional stories? story, inches; story, inches.
- 5. Give size and material of floor beams of additional stories; 1st tier, x inches; 2d tier, x inches. Distance from centres on tier, inches; tier inches.
- 6. How will the building be occupied?

IF TO BE EXTENDED ON ANY SIDE, GIVE THE FOLLOWING INFORMATION.

- 1. Size of extension, No. feet front, ; feet rear, ; feet deep, ; No. of stories in height, ; No. of feet in height,
- 2. What will be the material of foundation walls of extension? What will be the depth? feet. What will be the thickness? inches.
- 3. Will foundation be laid on earth, sand, rock, timber or piles?

IF TO BE EXTENDED ON ANY SIDE GIVE THE FOLLOWING INFORMATION.

4. What will be the base, stone or concrete? If base stones, give size and thickness and how laid, If concrete, give thickness,
5. What will be the sizes of piers? What will be the sizes of the base of piers?
6. What will be the thickness of upper walls? 1st story, inches ; 2d story inches ; 3d story, inches ; 4th story, inches ; 5th story, inches ; 6th story, inches ; 7th story, inches ; from thence to top, inches ; and of what materials to be constructed,
7. State whether independent or party-walls. If party-walls give thickness thereof
8. With what material will walls be coped?
9. What will be the materials of front? If of stone, what kind? Give thickness of front ashlar. Give thickness of backing.
10. Will the roof be flat, peaked or mansard?
11. What will be the materials of roofing?
12. Give size and material of floor beams, 1st tier, x ; 2d tier, x ; 3d tier, x ; 4th tier, x ; 5th tier, x ; 6th tier, x ; 7th tier, x ; roof tier, x State distance from centres on 1st tier, inches ; 2d tier, inches ; 3d tier, inches ; 4th tier, inches ; 5th tier, inches ; 6th tier, inches ; 7th tier, inches ; roof tier, inches
13. If floors are to be supported by columns and girders, give the following information : Size and material of girders under 1st floor, x under each of the upper floors, Size and material of columns under first floor, under each of the upper floors,
14. If the front, rear or side walls are to be supported, in whole or in part, by iron girders or lintels, give definite particulars,
15. If girders are to be supported by brick piers and columns, state the size of piers and columns.
16. How will the extension be connected with present or main building?
17. How will the extension be occupied? If for dwelling purposes, state how many families are to occupy each floor.
18. State who will superintend the alterations.

IF ALTERED INTERNALLY, GIVE DEFINITE PARTICULARS AND STATE HOW THE BUILDING WILL BE OCCUPIED :

*Dumbwaiter to be placed in restaurant (Store) + to go up one way to kitchen 1 beam to be cut + a 3x10 header to be put in to support cut beam.
One family will occupy whole building*

IF THE FRONT, REAR, OR SIDE WALLS, OR ANY PORTION THEREOF, ARE TO BE TAKEN OUT AND REBUILT, GIVE DEFINITE PARTICULARS, AND STATE IN WHAT MANNER :

Ernest H. Ritzmann Address *391 - 3rd St*
Architect *A. W. J. Pohl* Address *98 - 2nd Ave.*
Mason _____ Address _____
Carpenter _____ Address _____

REPORT UPON APPLICATION.

Department of Buildings of the City of New York.

NEW YORK, *Dec 11th* 189*7*

To the Superintendent of Buildings:

I respectfully report that I have thoroughly examined and measured the building, walls, etc., named in the foregoing application, and found the foundation wall to be built of *Stone 20"* inches thick, *10'* feet below curb, the upper wall built of *Brick 12"* inches thick, *90* feet deep, *30* feet in height, and that the mortar in said wall is hard and good, and that all the walls are in good and safe condition.

What is the nature of the ground? *Earth*

What kind of sand was used in the mortar? *sharp*

How is or was the building occupied? *store & dwelling*

(The Inspector must here state what defects, if any, are in the walls, beams or other part of the building.)

(The Inspector must state the thickness of each wall in each and every story.)

cellar Stone 20"
1-2 & 3d stories Brick 12"

all the wacs are in a good safe condition
There is a wooden girder 7"x7" in cellar. wooden posts
6"x6" 9' apart

J. M. Dolan Inspector.

THE BUILDING LAW REQUIRES:

- 1st—That all stone walls shall be properly bonded and laid in cement mortar.
- 2d—That all skylights having a superficial area of more than nine square feet, placed in any building, shall have the sashes and frames thereof constructed of iron and glass.
- 3d—That every building which is more than two stories in height above the curb level, except dwelling-houses, hotels, school-houses and churches, shall have doors, blinds or shutters made of iron, hung to iron hanging frames or to iron eyes built into the wall, on every window and opening above the first story thereof, excepting on the front openings of buildings fronting on streets which are more than thirty feet in width. Or the said doors, blinds or shutters may be constructed of pine or other soft wood of two thicknesses of matched boards at right angles with each other, and securely covered with tin, on both sides and edges, with folded lapped joints, the nails for fastening the same being driven inside the lap; the hinges and bolt, or latches shall be secured or fastened to the door or shutter after the same has been covered with the tin, and such doors or shutters shall be hung upon an iron frame, independent of the woodwork of the windows and doors, or two iron hinges securely fastened in the masonry; or such frames, if of wood, shall be covered with tin in the same manner as the doors and shutters.
- 4th—That outside fire escapes shall be placed on every dwelling-house occupied by or built to be occupied by three or more families above the first story, and every building already erected, or that may hereafter be erected, more than three stories in height, occupied and used as a hotel or lodging-house, and every boarding-house, having more than fifteen sleeping-rooms above the basement story, and every factory, mill, manufactory or workshop, hospital, asylum or institution for the care or treatment of individuals, and every building in whole or in part occupied or used as a school or place of instruction or assembly, and every office building five stories or more in height, all to be constructed as follows:

BALCONIES MUST NOT BE LESS THAN THREE FEET WIDE.

- BRACKETS must not be less than $\frac{1}{2} \times 1\frac{1}{4}$ inches wrought iron, placed edgewise, or $1\frac{1}{4}$ inch angle iron $\frac{1}{4}$ inch thick, well braced, and not more than three feet apart, and the braces to brackets must be not less than $\frac{3}{4}$ inch square wrought iron, and must extend two-thirds of the width of the respective brackets or balconies. In all cases the brackets must go through the wall, and be turned down three inches.
- BRACKETS ON NEW BUILDINGS must be set as the walls are being built. When brackets are to be put on old houses, the part going through the wall shall not be less than one inch diameter, with screw nuts and washers not less than five inches square and $\frac{1}{2}$ inch thick.
- TOP RAILS.—The top rail of balcony must be $1\frac{1}{4}$ inch \times $\frac{1}{2}$ inch wrought iron or $1\frac{1}{4}$ inch angle iron $\frac{1}{4}$ inch thick, and in all cases must go through the walls, and be secured by nuts and 4 inch square washers, at least $\frac{3}{8}$ inch thick, and no top rail shall be connected at angles by the use of cast iron.
- BOTTOM RAILS.—Bottom rails must be $1\frac{1}{4}$ inch \times $\frac{3}{4}$ inch wrought iron or $1\frac{1}{2}$ inch angle iron $\frac{1}{4}$ inch thick, well leaded into the wall. In frame buildings the top rails must go through the studding and be secured on the inside by washers and nuts as above.
- FILLING-IN BARS.—The filling-in bars must be not less than $\frac{1}{2}$ inch round or square wrought iron, placed not more than 6 inches from centres, and well riveted to the top and bottom rails.
- STAIRS.—The stairs in all cases must be not less than 18 inches wide, and constructed of $\frac{1}{4} \times 3\frac{1}{2}$ inch wrought iron sides or strings. Steps may be of cast iron of the same width of strings, or $\frac{3}{8}$ inch round iron, double rungs, and well riveted to the strings. The stairs must be secured to a bracket on top and rest on and be secured to a bracket or extra cross bar at the bottom. All stairs must have a $\frac{3}{4}$ inch hand rail of wrought iron, well braced.
- FLOORS.—The flooring of balconies must be of wrought iron $1\frac{1}{2} \times \frac{3}{4}$ inch slats placed not over $1\frac{1}{4}$ inches apart, and secured to iron battens $1\frac{1}{2} \times \frac{3}{8}$ inch, not over three feet apart and riveted at the intersection. The openings for stairways in all balconies shall not be less than 20 inches wide and 36 inches long, and have no covers.
- DROP LADDERS.—Drop ladders from lower balconies where required shall not be less than 14 inches wide, and shall be made of $1\frac{1}{2} \times \frac{3}{8}$ inch sides and $\frac{3}{8}$ inch rungs of wrought iron. In no case shall a drop ladder be more than 12 feet in length. In no case shall the ends of balconies extend more than nine inches over the brackets.
- SCUTTLE LADDERS.—Ladders to scuttles shall be constructed in all cases the same as the stairs or step-ladders from balconies of fire escapes.
- THE HEIGHT OF RAILING around balconies shall not be less than two feet nine inches.

No Fire Escape will be approved by the Superintendent of Buildings if not in accordance with above specifications.

In constructing all balcony fire-escapes, the manufacturer thereof shall securely fasten thereto, in a conspicuous place, a cast-iron plate having suitable raised letters on the same, to read as follows: Notice! Any person placing any incumbrance on this balcony is liable to a penalty of ten dollars and imprisonment for ten days.

5th—That all exterior and division or party walls over fifteen feet high, excepting where such walls are to be finished with cornices, gutters or crown mouldings, shall have parapet walls carried two feet above the roof, and shall be coped with stone, well-burnt terra-cotta or cast iron.

6th—That every building and the tops and sides of every dormer-window thereon shall be covered and roofed with slate, tin, copper or iron, or such other quality of fire-proof roofing as the superintendent of buildings, under his certificate, may authorize.

7th—That all exterior cornices shall be fire proof.

8th—That the stone or brick work of all smoke flues, and the chimney shafts of all furnaces, boilers, bakers' ovens, large cooking ranges and laundry stoves, and all flues used for a similar purpose, shall be at least eight inches in thickness. If there is a cast-iron or burnt clay pipe built inside of the same, with one-inch air space all around it, then the stone or brick work inclosing such pipes shall not be less than four inches in thickness.

9th—That before any iron or steel beam, lintel or girder intended to span an opening over ten feet in length in any building, shall be used for supporting a wall, it shall be inspected, tested and approved as provided by law.

ORIGINAL.

Form No. 2-1900.

Applicant must indicate the Building Line or Lines clearly and distinctly on the drawings.

2770
5

464

Department of Buildings of The City of New York.

6 THOMAS J. BRADY,
President of the Board of Buildings and
Commissioner of Buildings for the Bor-
oughs of Manhattan and The Bronx.
Office, No. 220 Fourth Avenue, S. W. cor. 18th Street,
Borough of Manhattan.

JOHN GUILFOYLE,
Commissioner of Buildings for
the Borough of Brooklyn.
Office, Borough Hall, Borough of Brooklyn.

DANIEL CAMPBELL,
Commissioner of Buildings for the Bor-
oughs of Queens and Richmond.
Office, Richmond Building, New Brighton, Staten Island,
Borough of Richmond.
Branch Office, Town Hall, Jamaica, Long Island,
Borough of Queens.

Plan No. 2770/1900

APPLICATION TO ALTER, REPAIR, ETC.

Application is hereby made to the Commissioner of Buildings of The City of New York, for the Borough of Manhattan & the Bronx for the approval of the detailed statement of the specifications and plans herewith submitted, for the alteration or repair of the building herein described. All provisions of the Building Code shall be complied with in the alteration or repair of said building, whether specified herein or not.

Michael J. Bergin
(Sign here) for: Kuntzer & Kohl archts.

BOROUGH OF Manhattan THE CITY OF NEW YORK, Oct 16th 1900

LOCATION AND DESCRIPTION OF PRESENT BUILDING.

- State how many buildings to be altered All
- What is the exact location thereof? (State on what street or avenue; the side thereof, the number of feet from the nearest street or avenue, and the name thereof) No. 39, Bumsy East side between 5th & 6th Streets.
- How was the building occupied? Store and one family
How is the building to be occupied? Store and one family
- Is the building on front or rear of lot? front Is there any other building on the lot? no
If so, state size: _____ feet front; _____ feet rear; _____ feet deep; _____ stories high. How occupied?
- Size of lot? 24' 4" feet front; 24' 4" feet rear; 80' 0" feet deep.
- Size of building which it is proposed to alter or repair? 24' 4" feet front; 24' 4" feet rear; 40' 0" feet deep. Number of stories in height? 2 & Attic Height from curb level to highest point? 35' 0"
- Depth of foundation walls below curb level? 10 Material of foundation walls? Stone
Thickness of foundation walls? front 20 inches; rear 20 inches; side 20 inches; party 20 inches.
- Material of upper walls? Brick If ashlar, give kind and thickness _____
- Thickness of upper walls:
Basement: front _____ inches; rear _____ inches; side _____ inches; party _____ inches.
1st story: " 12 " " 12 " " 12 " " 12 "
2d story: " 12 " " 12 " " 12 " " 12 "
Attic 3d story: " 12 " " 12 " " 12 " " 12 "
4th story: " _____ " " _____ " " _____ " " _____ "
5th story: " _____ " " _____ " " _____ " " _____ "
6th story: " _____ " " _____ " " _____ " " _____ "
- Is roof flat, peak or mansard? Peak

11. Size of present extension, if any? 24' 4" feet front; 19, 3" feet deep; 22' 0" feet high.
12. Thickness and material of foundation walls? stone 20"
13. Material of upper walls? Brick If ashlar, give kind and thickness
14. Thickness of upper walls:
 Basement: front _____ inches; rear 8 inches; side _____ inches; party _____ inches.
 1st story: " " " 8 " " _____ "
 2d story: " " " 8 " " _____ "
 3d story: " " " _____ " " _____ "
 4th story: " " " _____ " " _____ "
15. Is present building provided with a fire escape? _____

If to be extended on any side, give the following information:

16. Is extension to be on side, front or rear? on rear
17. Size of proposed extension, feet front 24, 4'; feet rear 24, 4'; feet deep 20' 9"; number of stories in height? one number of feet in height? 16' 0"
18. Material of foundation walls? stone; depth 4 feet; material of base course base stone; thickness of base course 8; thickness of foundation walls, front old inches; side 20 inches; rear 20 inches; party _____ inches.
19. Will foundation be on rock, sand, earth or piles? on earth
20. What will be the size of piers in cellar? _____; distance on centres? _____; size of base of piers? _____; thickness of cap stones? _____; of bond stones? _____
21. Material of upper walls? _____; material of front? _____
22. Thickness, exclusive of ashlar, of upper walls:
 1st story: front _____ inches; rear 12 inches; side 12 inches; party _____ inches.
 2d story: " " " _____ " " _____ "
 3d story: " " " _____ " " _____ "
 4th story: " " " _____ " " _____ "
 5th story: " " " _____ " " _____ "
 6th story: " " " _____ " " _____ "
23. With what will walls be coped? with stone or terra cotta
24. Will roof be flat, peak, or mansard? flat
25. Materials of roofing? tin
26. Give size and material of floor and roof beams
 1st tier, _____; size _____; distance on centres _____
 2d tier, " " " _____ " " _____ "
 3d tier, " " " _____ " " _____ "
 4th tier, " " " _____ " " _____ "
 5th tier, " " " _____ " " _____ "
 Roof tier, " " 3' x 10' " " less than 20"
27. Give material of girders _____ of columns _____
 Size of girders, 1st tier _____; size of columns, 1st floor _____
 " " 2d " _____ " " 2d " _____ "
 " " 3d " _____ " " 3d " _____ "
 " " 4th " _____ " " 4th " _____ "
 " " 5th " _____ " " 5th " _____ "
 " " roof " _____ " " 6th " _____ "