

Received, NOV 13 1891

Original

1

B466
L12

APPLICATION TO ALTER, REPAIR, ETC.

Application is hereby made to alter as per subjoined detailed statement of specification for Alterations, Additions or Repairs to buildings already erected, and I herewith submit Plans and Drawings of such proposed alterations; and I do hereby agree that the provisions of the Building Law will be complied with, whether the same are specified herein or not. I hereby certify that I am authorized to make this application.

(Sign here)

Cos. J. Dupre
Super School Buildings

NEW YORK, November 1891

1. State how many buildings to be altered. 012
2. What is the street or avenue and the number thereof? Give diagram of property. 206-208 East 11th Street
3. How much will the alteration cost? \$ \$ 2000 ⁰⁰/₁₀₀

GIVE THE FOLLOWING INFORMATION AS TO THE PRESENT BUILDING:

1. Size of lot on which it is located, No. of feet front, 36; feet rear, 36; feet deep, 88 feet
2. Size of building, No. of feet front, 36; feet rear, 36; feet deep, 64 No. of stories in height, 2; No of feet in height from curb level to highest point of beams, 40 feet
3. Material of building, Stone & Brick; material of front, Stone & Brick
4. Whether roof is peak, flat, or mansard, flat
5. Depth of foundation walls 4 feet; thickness of foundation walls, 20 in.; materials of foundation walls, Stone
6. Thickness of upper walls, 16 inches. Material of upper walls, Brick
7. Whether independent or party walls, independent
8. How the building is or was occupied, Church

IF TO BE RAISED OR BUILT UPON, GIVE THE FOLLOWING INFORMATION:

1. How many stories will the building be when raised?
2. How high will the building be when raised?
3. Will the roof be flat, peak, or mansard?
4. What will be the thickness of wall of additional stories? story, inches; inches.
5. Give size and material of floor beams of additional stories; 1st tier, x 2d tier, x Distance from centres on tier, inches; tier inches.
6. How will the building be occupied?

IF TO BE EXTENDED ON ANY SIDE, GIVE THE FOLLOWING INFORMATION.

1. Size of extension, No. feet front,; feet rear,; feet deep,; No. of stories in height,; No. of feet in height,
2. What will be the material of foundation walls of extension? What will be the depth? feet. What will be the thickness? inches.
3. Will foundation be laid on earth, sand, rock, timber or piles?

IF TO BE EXTENDED ON ANY SIDE GIVE THE FOLLOWING INFORMATION.

4. What will be the base, stone or concrete? If base stones, give size and thickness and how laid, If concrete, give thickness,
5. What will be the sizes of piers? What will be the sizes of the base of piers?
6. What will be the thickness of upper walls? 1st story, inches ; 2d story, inches ; 3d story, inches ; 4th story, inches ; 5th story, inches ; 6th story, inches ; 7th story, inches ; from thence to top, inches ; and of what materials to be constructed,
7. State whether independent or party-walls. If party-walls give thickness thereof.
8. With what material will walls be coped?
9. What will be the materials of front? If of stone, what kind? Give thickness of front ashlar. Give thickness of backing.
10. Will the roof be flat, peaked or mansard?
11. What will be the materials of roofing?
12. Give size and material of floor beams, 1st tier, x ; 2d tier, x ; 3d tier, x ; 4th tier, x ; 5th tier, x ; 6th tier, x ; 7th tier, x ; roof tier, x State distance from centres on 1st tier, inches ; 2d tier, inches ; 3d tier, inches ; 4th tier, inches ; 5th tier, inches ; 6th tier, inches ; 7th tier, inches ; roof tier, inches
13. If floors are to be supported by columns and girders, give the following information : Size and material of girders under 1st floor, x under each of the upper floors, Size and material of columns under first floor, under each of the upper floors,
14. If the front, rear or side walls are to be supported, in whole or in part, by iron girders or lintels, give definite particulars,
15. If girders are to be supported by brick piers and columns, state the size of piers and columns.
16. How will the extension be connected with present or main building?
17. How will the extension be occupied? If for dwelling purposes, state how many families are to occupy each floor.
18. State who will superintend the alterations. C. B. J. Snyder

IF ALTERED INTERNALLY, GIVE DEFINITE PARTICULARS AND STATE HOW THE BUILDING WILL BE OCCUPIED :

Temporary School

A temporary structure to be erected in Rear of Yard of the size exhibited on accompanying drawings for water closets & urinals

IF THE FRONT, REAR, OR SIDE WALLS, OR ANY PORTION THEREOF, ARE TO BE TAKEN OUT AND REBUILT, GIVE DEFINITE PARTICULARS, AND STATE IN WHAT MANNER :

The rear windows extended to floor and stairs to Yard. All outer doors made to open outwards

FORM 2, 1890.

Original
Fire Department, City of New York.
Bureau of Inspection of Buildings.

Detailed Statement of Specification
FOR
ALTERATIONS TO BUILDINGS.

No. 1941 Submitted Nov 13 1891

LOCATION
Nos
206-208 East 14th Street
Owner Mayor Alderman (Municipal)
Architect C.B.J. Snyder
Builder not selected

Received by Binastiel Nov 14 1891
Returned by [Signature] 28 1891
Report favorable

FINAL REPORT
NEW YORK, April 1 1892

To the Superintendent of Buildings
Work was commenced on the within described building on the 4th day of January 1892 and completed on the 2nd day of March 1892, and has been done in accordance with the foregoing detailed statement, except as noted below.

REMARKS
Inspector.

Referred to Inspector [Signature] Dec 13 1891
Returned [Signature] Reilly Jan 2 1892
Inspector.

Drawings inside
address [Signature] New York, Dec 27 1891

This is to certify that I have examined the within detailed statement, together with the copy of the plans relating thereto, and find the same to be in accordance with the provisions of the laws relating to Buildings in the City of New York, that the same has been approved, and entered in the records of this Bureau.

[Signature]
Superintendent of Buildings

N.Y. Dec 32 1891

There will be no alterations of the Building proper, except the cutting down of two panels in rear windows to pane doors leading from main Building to Yard through a stairway - said stairway to be constructed of wood, with treads 10 1/2" wide and risers 6 3/4" high - Railing on one side

C.B.J. Snyder
Approved [Signature]
[Signature]
Dec 1891

School House
(Municipal)
Refer to [Signature]
[Signature]
[Signature]

[Signature]
[Signature]

Owner Mayor, Aldermen, Community Address City Hall
 Architect C. J. Snyder Address 146 Grand St.
 Mason not selected Address _____
 Carpenter _____ Address _____

REPORT UPON APPLICATION.

BUREAU OF INSPECTION OF BUILDINGS,

NEW YORK, Jan 24 1891

To the Superintendent of Buildings:

I respectfully report that I have thoroughly examined and measured the building, walls, etc., named in the foregoing application, and found the foundation wall to be built of Stone 20 inches thick, 6 feet below curb, the upper wall built of Brick 16 inches thick, 65 feet deep. 32 feet in height, and that the mortar in said wall is hard and good, and that all the walls are in good and safe condition.

What is the nature of the ground? Soil

What kind of sand was used in the mortar? Good material

How is or was the building occupied? as a church

(The Inspector must here state what defects, if any, are in the walls, beams or other part of the building.)
 The " " state the thickness of each wall in each and every story.)

No defects visible

August P. Pinckney Inspector.

THE BUILDING LAW REQUIRES:

- 1st—All stone walls must be properly bonded.
- 2d—All skylights having a superficial area of more than 9 square feet must be of iron and glass.
- 3d—All buildings over two stories or above 25 feet in height, except dwellings, school houses, and churches, on streets less than 30 feet wide, must have iron shutters on every window and opening above the first story. The front windows on streets over 30 feet wide are exempted.
- 4th—Outside fire escapes are required on all dwelling houses over two stories in height, occupied or built to be occupied by two or more families on any floor above the first, and on dwellings more than four stories in height, occupied by three or more families above the first floor, and on office buildings, hotels and lodging houses, factories, mills, workshops, hospitals, asylums and schools, all to be constructed as follows:

BALCONIES MUST NOT BE LESS THAN THREE FEET WIDE.

BRACKETS must not be less than 3/4 x 1 3/4 inches wrought iron, placed edgewise, or 1 3/4 inch angle iron 1/4 inch thick, well braced, and not more than three feet apart, and the braces to brackets must be not less than 3/4 inch square wrought iron, and must extend two-thirds of the width of the respective brackets or balconies. In all cases the brackets must go through the wall, and be turned down three inches.

BRACKETS ON NEW BUILDINGS must be set as the walls are being built. When brackets are to be put on old houses, the part going through the wall shall not be less than one inch diameter, with screw nuts and washers not less than five inches square and 1/4 inch thick.

TOP RAILS.—The top rail of balcony must be 1 3/4 inch x 1 1/2 inch square wrought iron, or 1 1/2 inch angle iron 1/4 inch thick, and in all cases must go through the walls, and be secured by nuts and 1 inch square washers, at least 3/4 inch thick, and no top rail shall be connected at angles by the use of cast iron.

BOTTOM RAILS.—Bottom rails must be 1 1/4 inch x 3/4 inch wrought iron or 1 1/4 inch angle iron 1/4 inch thick, well leaded into the wall. In frame buildings the top rails must go through the studding and be secured on the inside by washers and nuts as above.

FLOORING BARS.—The floor-in bars must be not less than 3/4 inch round or square wrought iron, placed not more than 6 inches from centres, and well riveted to the top and bottom rails.

STAIRS.—The stairs in all cases must be not less than 18 inches wide, and constructed of 1 1/4 x 3/4 inch wrought iron sides or string. Steps may be of cast iron of the same width of string, or 3/4 inch round iron, double rungs, and well riveted to the string. The stairs must be secured to a bracket on top and rest on and be secured to a bracket or extra cross bar at the bottom. All stairs must have a 3/4 inch hand rail of wrought iron, well braced.

FLOORS.—The flooring of balconies must be of wrought iron 1 1/4 x 3/4 inch slats placed not over 1 1/4 inches apart, and secured to iron battens 1 1/4 x 3/4 inch, not over three feet apart and riveted at the intersection. The openings for stairways in all balconies shall not be less than 29 inches wide and 3 1/2 inches long, and have no covers.

DROP LADDERS.—Drop ladders from lower balconies where required shall not be less than 14 inches wide, and shall be made of 1 1/4 x 3/4 inch sides and 3/4 inch rungs of wrought iron. In no case shall a drop ladder be more than 12 feet in length. In no case shall the ends of balconies extend more than nine inches over the brackets.

SCUTTLE LADDERS.—Ladders to scuttles shall be constructed in all cases the same as the stairs or step-ladders from balconies of fire escapes.

THE HEIGHT OF RAILING around balconies shall not be less than two feet nine inches.

No Fire Escape will be approved by this Bureau if not in accordance with above specifications.

- 5th—All walls must be coped with stone or terra cotta. If coped with stone, the stone must not be less than 2 1/2 inches thick; and if with terra cotta, the terra cotta must be made with proper lap joints.
- 6th—Roofs must be covered with fire-proof material.
- 7th—All cornices must be fire-proof.
- 8th—All FURNACE FLUES OF DWELLING HOUSES shall have at least eight inch walls on each side. No furnace flues shall be of less size than eight inches square, or four inches wide and sixteen inches long, inside measure. If preferred, the furnace flues may be made of cast iron or fire-clay pipe of proper size built in the walls, with an air space of not less than one inch between said pipes, and four inches of brick wall on the outside.
 All flues not built for furnace or boiler flues must be altered to conform to the above requirements before they are used as such.
- 9th—No iron beam, lintel, or girder, intended to span an opening over eight feet, intended to support a wall, shall be used for that purpose, until tested and approved as provided by law.

Admission received by the

ORIGINAL.

Applicant must indicate the Building Line or Lines clearly and distinctly on the Drawings.

2

Form No. 2-1896. Plan 1368

B466
L12

APPLICATION TO ALTER, REPAIR, Etc.

Application is hereby made to the Superintendent of Buildings of the City of New York, for the approval of the detailed statement of the specifications and plans herewith submitted, for the alteration or repair of the building herein described. All provisions of the Building Law shall be complied with in the alteration or repair of said building, whether specified herein or not.

(Sign here) *Frank B. Smith Architect*

NEW YORK, June 25th 1896

1. State how many buildings to be altered. One Church Building
2. What is the street or avenue and the number thereof? Give diagram of property. 206 and 208 East 11th St. South side 120'-0" East of 3rd Ave
3. How much will the alteration cost? \$ 2,500 00/100

GIVE THE FOLLOWING INFORMATION AS TO THE PRESENT BUILDING:

1. Size of lot on which it is located, No. of feet front, 36; feet rear, 36; feet deep, 100.
2. Size of building, No. of feet front, 36; feet rear, 36; feet deep, 65 No. of stories in height, 1 S. V. Baum No. of feet in height from curb level to highest point of beams, 32
3. Material of building, Brick; material of front, Brick and Stone
4. Whether roof is peak, flat, or mansard, Flat
5. Depth of foundation walls, Seven feet; thickness of foundation walls, 16; materials of foundation walls, Brick
6. Thickness of upper walls, 12 inches. Material of upper walls, Brick
7. Whether independent or party walls, Independent
8. How the building is or was occupied, As a Church and Lecture Room

IF TO BE RAISED OR BUILT UPON, GIVE THE FOLLOWING INFORMATION:

1. How many stories will the building be when raised?
2. How high will the building be when raised?
3. Will the roof be flat, peak, or mansard?
4. What will be the thickness of wall of additional stories? story, inches; story, inches.
5. Give size and material of floor beams of additional stories; 1st tier, x 2d tier, x Distance from centres on tier, inches; tier inches.
6. How will the building be occupied?

IF TO BE EXTENDED ON ANY SIDE, GIVE THE FOLLOWING INFORMATION.

1. Size of extension, No. feet front,; feet rear,; feet deep,; No. of stories in height,; No. of feet in height,
2. What will be the material of foundation walls of extension? What will be the depth? feet. What will be the thickness? inches.
3. Will foundation be laid on earth, sand, rock, timber or piles?

IF TO BE EXTENDED ON ANY SIDE GIVE THE FOLLOWING INFORMATION.

4. What will be the base, stone or concrete? If base stones, give size and thickness and how laid, If concrete, give thickness,
5. What will be the sizes of piers? What will be the sizes of the base of piers?
6. What will be the thickness of upper walls? 1st story, inches ; 2d story inches ; 3d story, inches ; 4th story, inches ; 5th story, inches ; 6th story, inches ; 7th story, inches ; from thence to top, inches ; and of what materials to be constructed,
7. State whether independent or party-walls. If party-walls give thickness thereof.
8. With what material will walls be coped?
9. What will be the materials of front? If of stone, what kind? Give thickness of front ashlar. Give thickness of backing.
10. Will the roof be flat, peaked or mansard?
11. What will be the materials of roofing?
12. Give size and material of floor beams, 1st tier, ; 2d tier, ; 3d tier, ; 4th tier, ; 5th tier, ; 6th tier, ; 7th tier, ; roof tier, State distance from centres on 1st tier, inches ; 2d tier, inches ; 3d tier, inches ; 4th tier, inches ; 5th tier, inches ; 6th tier, inches ; 7th tier, inches ; roof tier, inches
13. If floors are to be supported by columns and girders, give the following information : Size and material of girders under 1st floor, under each of the upper floors, Size and material of columns under first floor, under each of the upper floors,
14. If the front, rear or side walls are to be supported, in whole or in part, by iron girders or lintels, give definite particulars,
15. If girders are to be supported by brick piers and columns, state the size of piers and columns.
16. How will the extension be connected with present or main building?
17. How will the extension be occupied? If for dwelling purposes, state how many families are to occupy each floor.
18. State who will superintend the alterations.

IF ALTERED INTERNALLY, GIVE DEFINITE PARTICULARS AND STATE HOW THE BUILDING WILL BE OCCUPIED :

*Take down the entire gallery and partition forming vestibule
Put in new window frames front and rear same width as
present ones new floor in Main Auditorium and new pulpit
platform.*

IF THE FRONT, REAR, OR SIDE WALLS, OR ANY PORTION THEREOF, ARE TO BE TAKEN OUT AND REBUILT, GIVE DEFINITE PARTICULARS, AND STATE IN WHAT MANNER :


*To take down the front wall sufficiently to secure new arrangement
as shown by colored portion, which will be rebuilt as shown
midway of window and door frames, same as at present and
new heads arched as shown, ~~rest of~~ frame a new peaked roof
to support pediment, replace wooden cornice with galvanized iron
and make the whole strong and secure.*

THIRD AVE

10TH ST.

ELEVENTH ST.

SECOND AVE.



7/25/96/14 ORIGINAL

FORM No. 2-1896.

Department of Buildings,
CITY OF NEW YORK.

Detailed Statement of Specifications

FOR

ALTERATIONS TO BUILDINGS.

No. 1368 Submitted July 14 1896

LOCATION.

706-208 East 11th St.

Owner Smyrna Wesley
Congregational Church

Architect Frank B. Smith
Builder

Received by F.W. Bowles July 15th 1896

Returned by a... July 22 1896

Report favorable.

FINAL REPORT.

New York, Oct. 31 1896

To the Superintendent of Buildings:

Work was commenced on the within described building on the 17 day of Aug. 1896 and completed on the 31 day of Oct. 1896 and has been done in accordance with the foregoing detailed statement, except as noted below.

J.B. Dolan
Inspector.

REMARKS:

Referred to Inspector 9

7/28 Nov. 2 1896
Returned J.B. Dolan 1896

J.B. Dolan
Inspector.

DRAWINGS INSIDE.

NEW YORK, 1896
This is to certify that I have examined the within detailed statement, together with the copy of the plans relating thereto, and find the same to be in accordance with the provisions of the laws relating to buildings in the City of New York; that the same has been approved and entered in the records of the Department of Buildings.
Superintendent of Buildings.

New York... N.Y. 24 1896
This is to certify that the within detailed statement of specifications and a copy of the plans relating thereto, have been submitted to the Superintendent of Buildings and are hereby approved.
Superintendent of Buildings.

Public Building
Church Section

W. July 24 1896
John E. Miller

THE CITY OF NEW YORK

DEPARTMENT OF BUILDINGS

MANHATTAN
Municipal Bldg.,
New York 7

BROOKLYN
Municipal Bldg.,
Brooklyn 1


BRONX
1932 Arthur Avenue
Bronx 57

QUEENS
120-55 Queens Blvd.,
Kew Gardens 24, L. I.

RICHMOND
Boro Hall,
St. George 1, S. I.

STATEMENT "A"

BLOCK 466 LOT 12

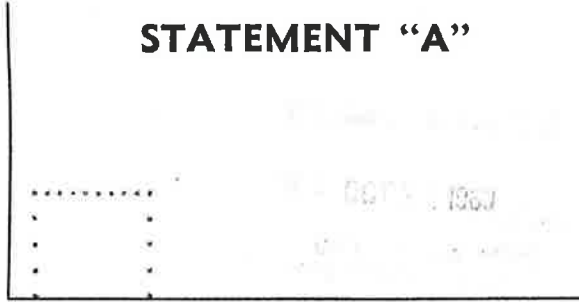

LOCATION 206-208 East 11th Street 129'-0" east of 3rd Avenue Manhattan
House Number Street Distance from Nearest Corner Borough

TO THE BOROUGH SUPERINTENDENT:

Application is hereby made for approval of the plans and specifications herewith submitted and to be made a part hereof for the structure herein described, with the understanding that:

If this application shall be disapproved in part and if no further action is taken thereon within one year after notice of partial disapproval, it shall be automatically withdrawn.

Any permit issued under which no work is commenced within one year from the time of issuance shall expire by limitation. (Adm. Code C26-177.0.)

Work will be supervised by Licensed Architect, Professional Engineer or by a Superintendent of Construction who has had ten years' experience supervising building construction and who has been properly qualified. (Adm. Code C26.187.0.)

Work under this approval will not be commenced until a permit has been obtained, application for which will be filed with the Borough Superintendent, accompanied by satisfactory evidence that compensation insurance has been obtained in accordance with the provisions of the Workmen's Compensation Law. (Adm. Code C26-161.0.)

EXAMINED AND RECOMMENDED

FOR APPROVAL ON DEC 15 1960

APPROVED _____, 19

[Signature]
 Examiner
[Signature]
 Borough Superintendent

Donald D. Fisher of

Jacob Fisher & Donald D. Fisher, Architects

(Typewrite Name)

his office is located at 225 Lafayette Street

in the Borough of Manhattan; in the City of N.Y.

in the State of N.Y.; that he is making this application for the approval of.....

Architectural, structural plans and

(Architectural, Structural, Mechanical, Etc.)

specifications herewith submitted and made part hereof.

Applicant further states that he has personally supervised the preparation of such.....

Architectural, structural plans and that to

(Architectural, Structural, Mechanical, Etc.)

the best of his knowledge and belief, the work will be carried out in compliance therewith, and the structure, if built in accordance with such plans, will conform with all applicable provisions of the charter, the administrative code, the multiple dwelling law, the labor law, the general city law, the zoning resolution, the rules of the board and all other laws governing building construction, except as specifically noted otherwise.

Applicant further states that he is duly authorized by M.P.J. Associates, Inc.

(Name of Owner)

who is the owner in fee of all that certain lot, piece or parcel of land, shown on the diagram annexed hereto and made a part hereof, to make application for the approval of such detailed statements of specifications and plans, elevator or plumbing work (if any) and amendments thereto, in the said owner's behalf.

Applicant further states that the full names and residences, street and number, of the owner or owners of the said land, and also of every person interested in said building or proposed structure, are as follows:

Owner's name M.P.J. Associates, Inc. Address 160 Broadway, N.Y.C.

(If a corporation, give full name and address of at least two officers.)

Pres. Jeanette Juskovitz V. Pres. Haskel Jacobs 160 Broadway, N.Y.C.

Lessee _____ Address _____

Architect Jacob Fisher & Donald D. Fisher Address 225 Lafayette St. N.Y.C.

Engineer _____ Address _____

Superintendent _____ Address _____

NOTICE—This statement must be TYPEWRITTEN and filed in QUADRUPLICATE.

ORIGINAL

THE CITY OF NEW YORK
DEPARTMENT OF BUILDINGS

MANHATTAN
Municipal Bldg.,
New York 7

BROOKLYN
Municipal Bldg.,
Brooklyn 1

BRONX
1932 Arthur Avenue
New York 57

QUEENS
120-55 Queens Blvd.
Kew Gardens 24, L. I.

RICHMOND
Boro Hall
St. George 1, S. I.

AMENDMENT

NOTICE—This Amendment must be TYPEWRITTEN and filed in TRIPLICATE

Alt. APPLICATION No. 65-19 60 BLOCK 466 LOT
(N. B., Alt., Elev., etc.)
LOCATION 206-208 East 11th Street 129'-0" east of 3rd Avenue Manhattan
House Number Street Distance from Nearest Corner Borough
Date Sept. 15, 19 61

Application is hereby made to the Borough Superintendent for approval of the following AMENDMENT to the specifications and plans filed with the above numbered application, with the stipulation that this amendment is to become a part of the aforesaid original application and subject to all the conditions, agreements and statements therein contained. Donald D. Fisher of

Jacob Fisher & Donald D. Fisher
Applicant Architects Signature
Address 225 Lafayette St. N.Y.C.



Amended plans herewith filed.

New seating arrangement now shown.

Accessory stairs at front east to be widened to 3'-6" with new concrete block enclosure wall.

Vestibule on 1st floor front to be removed.

New enclosure for air-conditioning equipment and steel supports for same to be erected at front as shown on plans.

Disapproved 9/21/61
15 seats between aisles not permitted
Accept - less than 300 seats
Asills P.O.
9/21/61

Estimated Cost: This Amendment \$ 2,000.00 Fee Required \$ 10.00 Verified by [Signature] 10.00
Fec Paid

NOTE—The applicant must not use the back of this sheet. If more space is needed, additional sheets must be used. No item must be continued over to another sheet; but each item must be complete on the sheet on which it appears. Only those items that appear above the endorsements at the bottom of the page can be considered.

EXAMINED AND RECOMMENDED SEP 25 1961
FOR APPROVAL ON SEP 25 1961, 19
APPROVED SEP 25 1961, 19

[Signature]
Examiner
Thomas V. Bayler

THE CITY OF NEW YORK
DEPARTMENT OF BUILDINGS

MANHATTAN
Municipal Bldg.,
New York 7

BROOKLYN
Municipal Bldg.,
Brooklyn 1

BRONX
1932 Arthur Avenue
New York 57

QUEENS
120-55 Queens Blvd.
Kew Gardens 24, L.I.

RICHMOND
Boro Hall
St. George 1, S.I.


AMENDMENT

NOTICE—This Amendment must be TYPEWRITTEN and filed in TRIPPLICATE

Alt. APPLICATION No. 65 19 60 BLOCK 466 LOT 12
(N. B., Alt., Elev., etc.)
LOCATION 206-208 East 11th St. 129'0" E. of 3rd Ave. Manhattan
House Number Street Distance from Nearest Corner Borough
Date April 12 19 61

Application is hereby made to the Borough Superintendent for approval of the following AMENDMENT to the specifications and plans filed with the above numbered application, with the stipulation that this amendment is to become a part of the aforesaid original application and subject to all the conditions, agreements therein contained. Donald D. Fisher of

Applicant Jacob Fisher & Donald D. Fisher Architects
Address 225 Lafayette St. NY NY

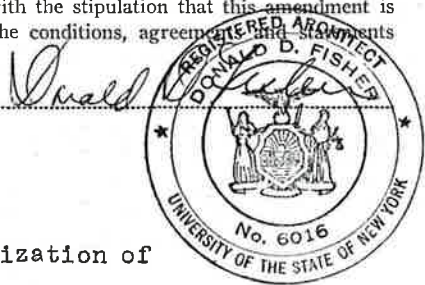

Amendment herewith filed with new Authorization of Owner and new Statement "A".

Remove existing toilet partitions at front west.
New toilet rooms to be relocated to rear east as shown on plans. Steps in passageway in basement to be relocated to the front of building just outside front wall.

Estimated Cost: This Amendment \$..... Fee Required \$ none Verified by J. J. [Signature]

Fee Paid

Note—The applicant must not use the back of this sheet. If more space is needed, additional sheets must be used. No item must be continued over to another sheet; but each item must be complete on the sheet on which it appears. Only those items that appear above the endorsements at the bottom of the page can be considered.

EXAMINED AND RECOMMENDED APR 21 1961 FOR APPROVAL ON

APPROVED APR 24 1961

[Signatures of Examiner and Approver]

THE CITY OF NEW YORK DEPARTMENT OF BUILDINGS

MANHATTAN
Municipal Bldg.
New York 7

BROOKLYN
Municipal Bldg.
Brooklyn 1

BRONX
1932 Arthur Ave.,
New York 57

QUEENS
120-55 Queens Blvd.,
Kew Gardens 24, L. I.

RICHMOND
Boro Hall,
St. George 1, S. I.


PLUMBING, MECHANICAL EQUIPMENT AND TANK INSTALLATION

BLOCK 466 LOT 1E

Alt. 65-60

FEEs REQUIRED FOR

ALT. No. 65-19 60

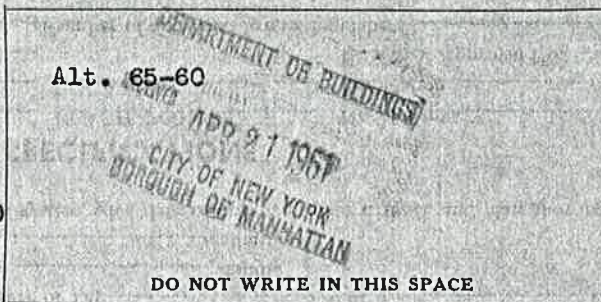

Street No. and LOCATION 206-208 East 11th Street
 Owner St. John Terrell Enterprises Inc Address 206 E. 11th St. N.Y.C.
 Lessee _____ Address _____
 Architect Jacob & Dona ld D. Fisher Address 225 Lafayette St. N.Y.C.
 Contractor _____ Address _____

COMPENSATION INSURANCE has been secured in accordance with the requirements of the Workmen's Compensation Law as follows:

To The Borough Superintendent: City of New York, April 13, 1961.

Application is hereby made on behalf of the owner-~~lessee~~ for approval of the plans and specifications herewith submitted, and made a part hereof, for the erection, alteration or installation of the building therein described,—with the understanding that if no work is performed hereunder within one year from the time of issuance, this approval shall expire by limitation as provided by law; and the applicant agrees to comply with the Building Code and all rules and regulations applicable thereto in effect at this date.

Applicant (Sign Here) Donald D. Fisher Address 225 Lafayette St. N.Y.C.

Examined and Recommended for Approval on April 24 1961 Anthony J. [Signature] Examiner

APPROVED APR 24 1961 [Signature] Borough Superintendent

Initial fee payment—

2nd payment of fee to be collected before a permit is issued—Amount \$ _____

Verified by _____ Date _____

ADDITIONAL FEES REQUIRED _____ AMOUNT \$ _____

VERIFIED BY _____ (Yes or No) DATE _____

Work Included Herein: Plumbing? Yes Sprinkler? _____ Standpipe? _____ Fuel Oil? _____ Gasoline Tank Installation or Fuel Oil (Bulk)? _____

1. State in detail the work proposed. Install 4 water closets, 4 wash basins, 2 sinks, 1 urinal and 1 shower in basement., also 2 3" XHCI yard drains

Class 0
Feet Front 28 Deep 38

no violation
at re

NOTICE—This application must be typewritten and filed in quadruplicate. All proposed work under this application must be shown as planned section. All vertical lines of soil, waste, leader and vent pipes should be designated by numbers or letters. A soil or waste line and its attendant vent line may be considered as one stack, and so numbered or lettered. In alterations, NEW WORK ONLY should be specified. When new fixtures are to be connected to present lines, the location and diameter of said lines must be shown on the plan. Minor alterations in connection with work described may be included in this form.